BENEITO FAURE®

passion for led light


passion
for
led light


BENEITO FAURE®


BENEITO FAURE
COMERCIAL
BENEITO FAURE




3D map

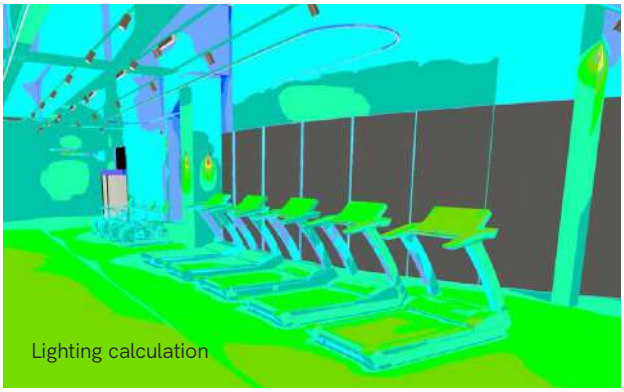

Lighting calculation



Render

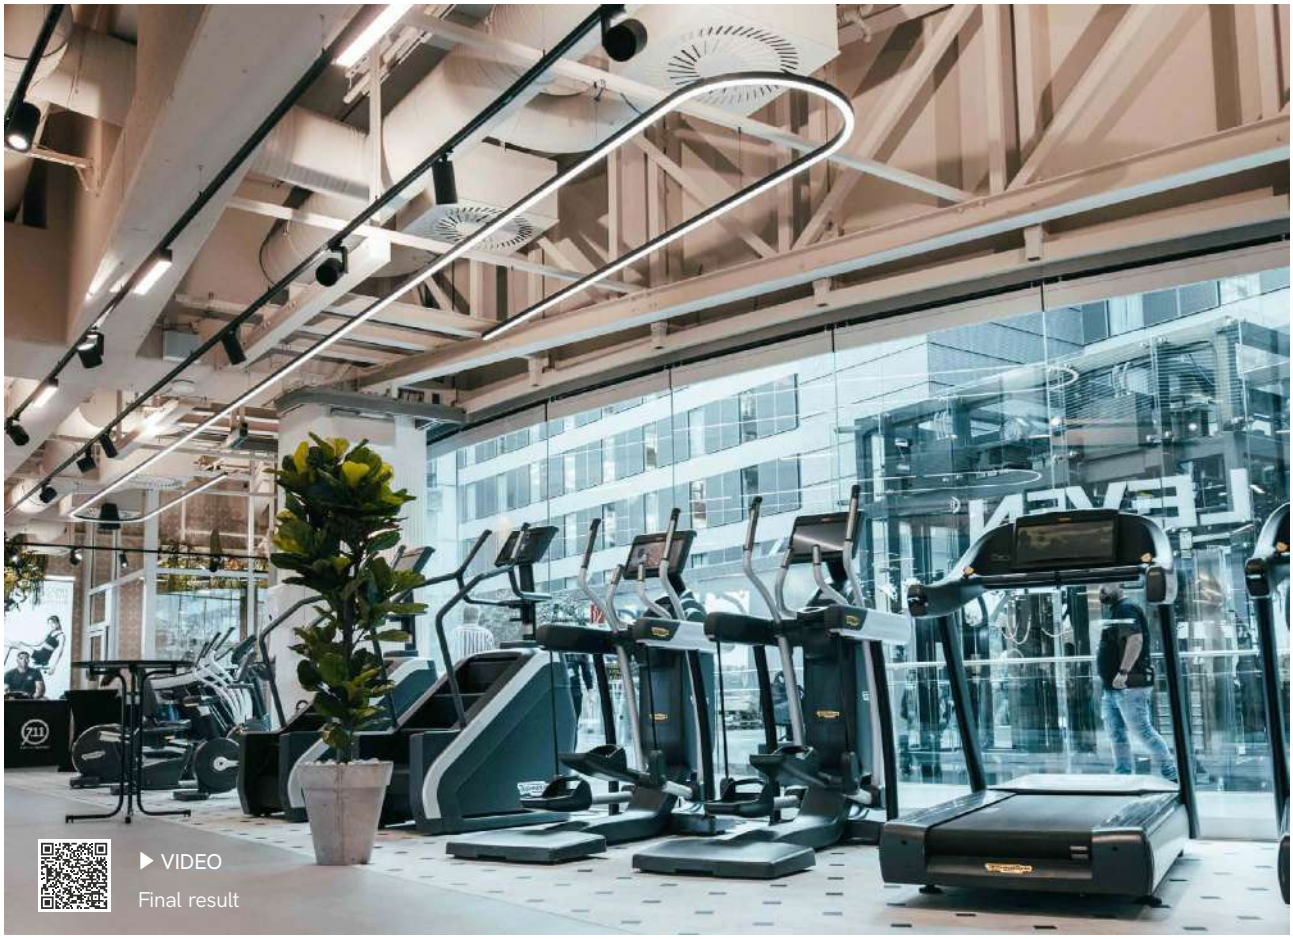

▶ VIDEO
Final result

FITSEVENELEVEN®, Club Frankfurt Airport.

Projects

Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations.
Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.
If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.
On the left is one of our latest interior lighting projects for the FITSEVENELEVEN® Club at Frankfurt Airport.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.
A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.

Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.
A la izquierda se muestra uno de nuestros últimos proyectos de iluminación interior el Club FITSEVENELEVEN® en el Aeropuerto de Frankfurt.

Symbology

Installation.
Instalación.



Casambi protocol.
Protocolo Casambi.



Tuya protocol.
Protocolo Tuya.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.



Dali protocol.
Protocolo Dali.



Dali 2 protocol.
Protocolo Dali 2.



Push.
Pulsador.



Emergency kit in luminaire.
Kit de emergencia en luminaria.



TRIAC Dimmable.
Regulable por TRIAC.



Radio frequency.
Radio frecuencia.



Made to measure strip LED cutting.
Corte de tiras LED a medida.



3 light intensities.
3 intensidades luminosas.



Saline-alkali resistance.
Resistencia a los álcalis salinos.



Customized cutting and handling.
Corte y manipulación personalizado.



Corrosion resisting.
Resistencia a la corrosión.



Anti-UV.
Anti-UV.



Customizable color.
Color personalizable.

AL
6060

Type of aluminium.
Tipo de aluminio.



Acoustic absorption.
Absorción acústica.



Fire resistance.
Resistente al fuego.



Recycled materials.
Materiales reciclados.

100% PET

100% Polyethylene Terephthalate.
100% Tereftalato de polietileno.



UGR
<19

Glare rating.
Indice de deslumbramiento.





Color temperature selector.
Selector de temperatura de color.

Power selector.
Selector de potencia.



20
IP

Color rendering index.
Índice de reproducción cromática.

Water and dust protection.
Resistencia al agua y al polvo.



Beam Angle.
Ángulo de apertura.

Light 360°.
Luz 360°.

>0,9
PF

220/230
VAC

Power Factor.
Factor de Potencia.

Voltage.
Tensión de entrada.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.



Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.



Do not cover.
No cubrir.

5
YEARS
WARRANTY

Warranty.
Años de garantía.

30.000
HOURS

Lifetime.
Horas de vida.

50/60
Hz

Hertz.
Hercios.



Class II.
Clase II.

CABLE
24CM

Cable length.
Longitud del cable.



Surge protection.
Protección contra sobretensiones.



Impact resistance.
Resistencia a los impactos.



Touch control.
Control táctil.



Battery autonomy.
Autonomía de la batería.



Charging time with electricity.
Tiempo de carga con corriente.



Motion sensor.
Detector de movimiento.



Distance sensor.
Distancia de detección.




Suitable for closed luminaires.
Apta para luminarias cerradas.



Units per box (min-max).
Unidades por caja.



Electronic waste.
Residuos electrónicos.



Replace cracked protection shield.
Sustituir pantalla de protección con fisuras.



Class I.
Clase I.




Class III.
Clase III.



Supported weight.
Peso soportado.



Operating Temperature.
Temperatura de trabajo.



Ground slope.
Inclinación del suelo.

AKZO
NOBEL

Anti corrosive marine paint.
Pintura anticorrosión marina.



Wireless charging.
Carga inalámbrica.



Battery capacity.
Capacidad de la batería.



Charging time with sun.
Tiempo de carga con sol.



Crepuscular sensor.
Sensor crepuscular.



Gravity sensor.
Sensor gravitatorio.



Adjustable operating time.
Tiempo de encendido regulable.



EMC anti-interference certification.
Certificación anti interferencias EMC.

RoHS

Restriction of Hazardous Substances.
Restricción de sustancias peligrosas.



European conformity.
Conformidad Europea.

Sampling & Display Stand

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects.
Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products.
Contact our sales department to order your exhibitor.

Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.
Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos.
Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Led strip book




(37x3,5x23,5cm)

Led strip briefcase



(42x15x35cm)

Led strips and profiles
2nd display

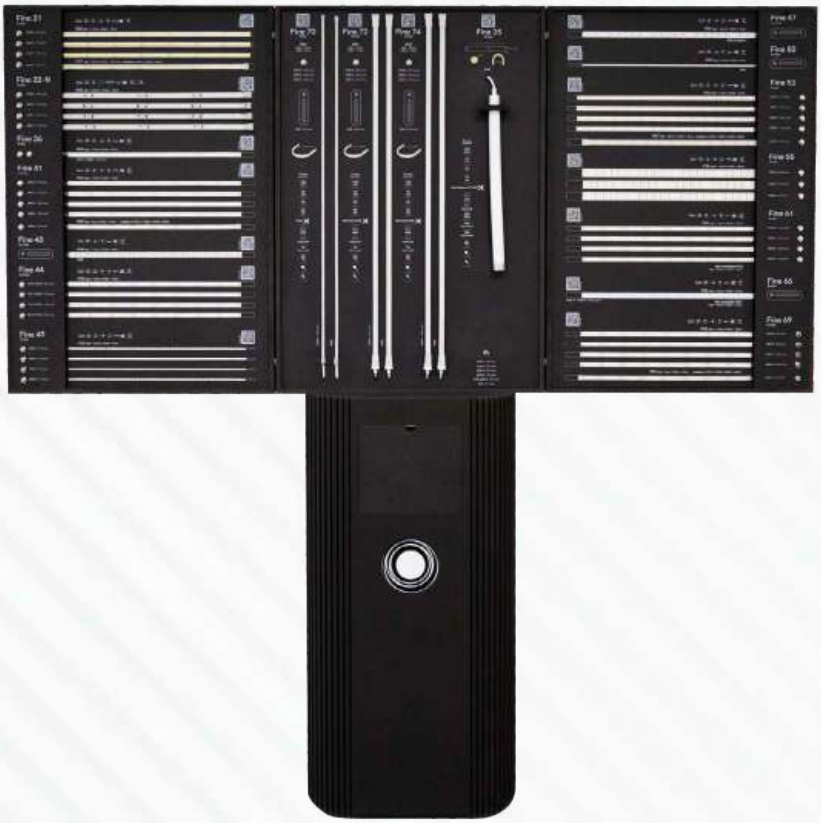

(197x45x197cm)

Led strips and profiles
1st display



(64x40x174cm) / (64x40x213cm)
with 2m profiles

Sampling & Display Stand



Touch panel

Touch panel display
side A



(110x38x200cm)

Touch panel display
side B



NEW

Magnet track mini display






(71,5x18x46cm)

HUMAN CENTRIC LIGHTING


One CCT foreach activity
Un CCT en cada actividad de tu dia

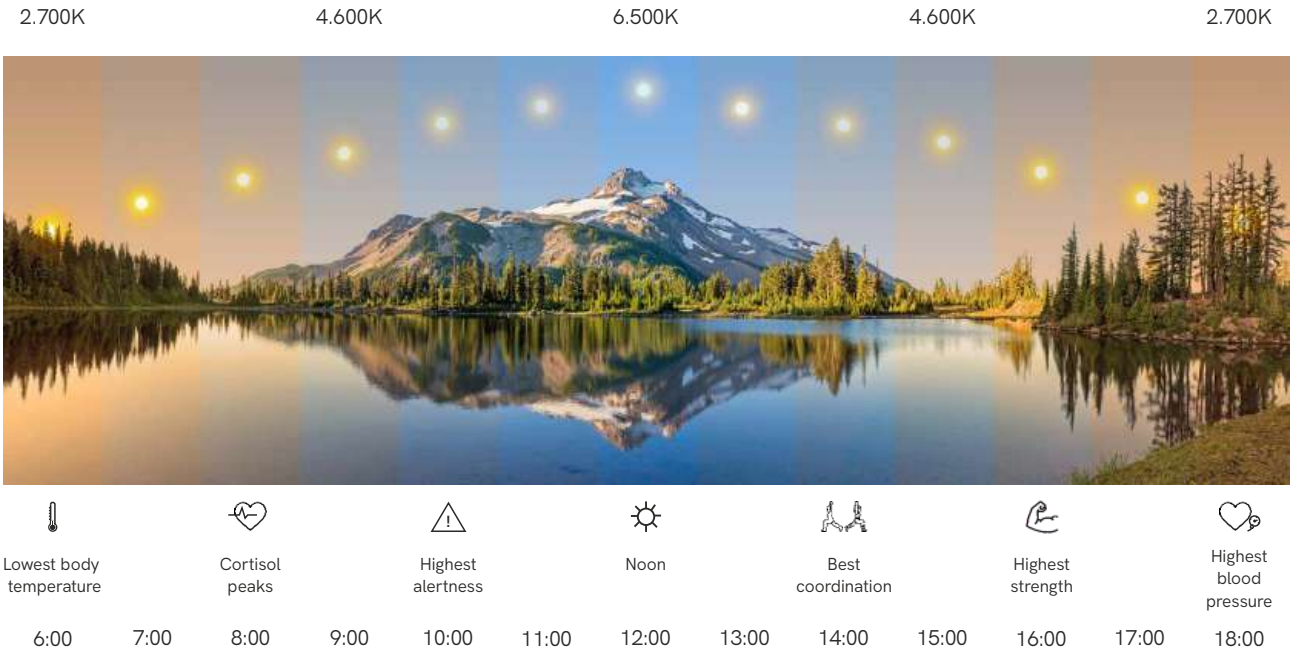

CCT is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.
You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El **CCT** es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.
Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.

Light quality
Calidad de la luz

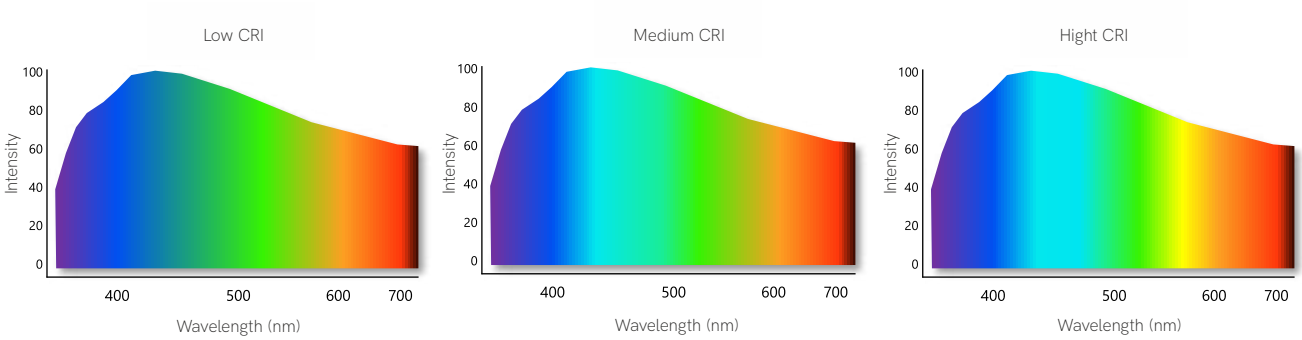


CRI or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El **CRI** o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.




Photobiological risk are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or RG1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.

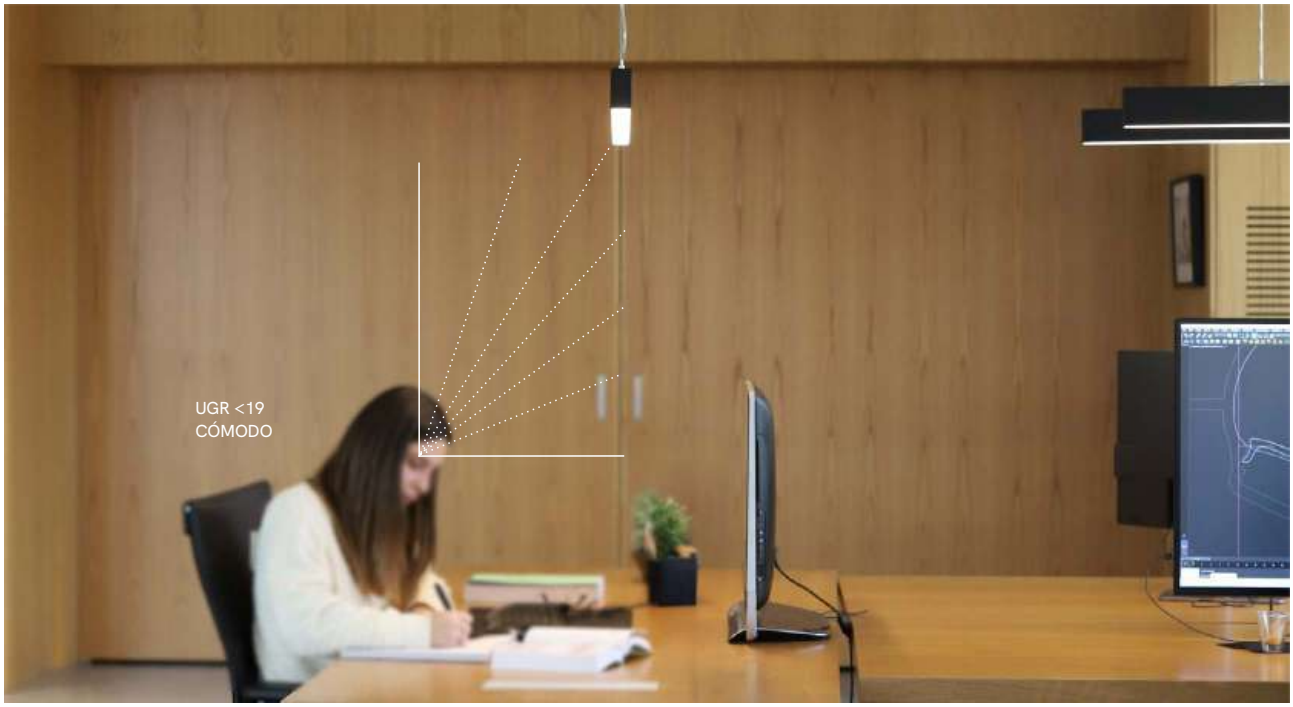

UGR or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less o equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

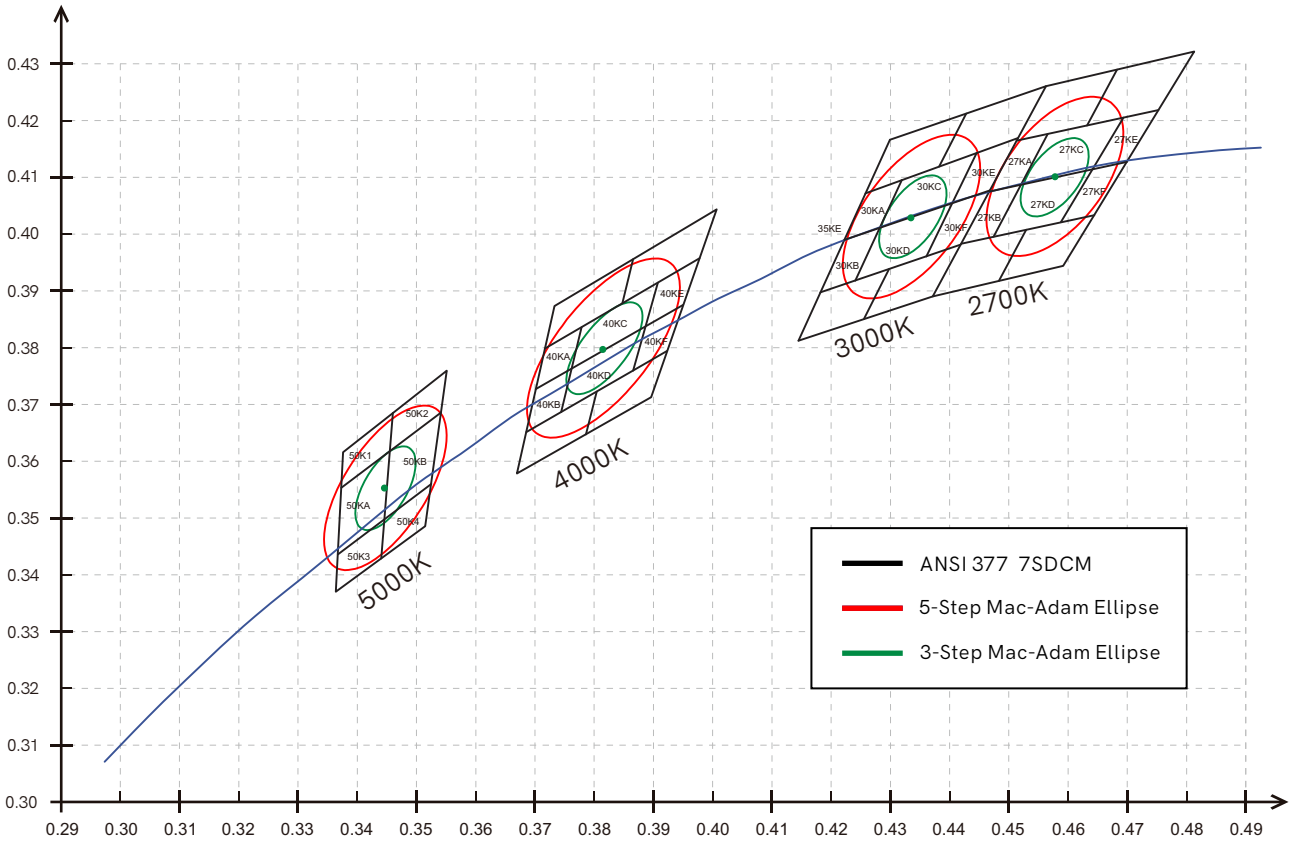

Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos Steps MacAdam son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.


ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.


The effects of light
Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.
La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.
Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.

Custom system


37 Evo


39 Evo fly

41 Evo dual


43 Evo mini



43 Evo R


45 Evo E


47 New Evo mini track


49 Evo track


52 Urban


55 Urban E


57 Urban train


57 New Urban train E


59 Urban fly


59 New Urban fly E



61 Urban work


61 New Urban work E


63 Urban asymmetric


63 New Urban asymmetric E



64 Urban wall sensor


65 Urban track


67 Urban market


69 New Quick



71 New Lift


73 New Vision


75 Time



75 Time E



77 Nexus



79 Dual



81 Forest



83 Time wall sensor


85 Time track



87 Kubo


87 Kubo E



89 Mirrow



91 Tax



93 Filter



95 Tubi



97 Tubi wall


99 Grip


101 Nyneto


103 Minimus


105 Dau


105 Dau E


107 Square


109 New Zero in XL



111 New Zero out XL


113 Zero in


115 Zero out


117 New Circus in XL


117 New Circus out XL


119 Circus in


119 New Circus out



121 Tundra



123 Zero direct XL



125 Zero direct



126-127 Zero design


131 Zero dual


133 Kaa


135 Kaa line



137 Horizon


139 Flash


141 Triton


143 Triton down


147 New Blaber Pick


149 Blaber line


151 Blaber r


151 New Blaber custom


152 Blaber sq


153 New Blaber mirrow



153 New Blaber evo



155 New Blaber zero direct


155 New Blaber zero in XL


157 New Blaber mac


159 New Blaber atmos


159 New Blaber atmos slim


161 Blaber trgl


161 New Blaber tax


162-163 Custom system accessories

Profiles


171 Box 15


171 Box 16


172 Box 17


172 Box 18


173 Box 53


173 Box 23


175 New Box 87


175 New Box 92


176 New Box 74


176 New Box 43


177 Box 95


177 Box 75


179 Box 38


179 Box 35


180 Box 14



180 Box 71


181 Box 60


183 Box 99


184 Box 11


184 Box 12



185 Box 13


186
Box 10


186
Box 19


187
Box 37


189
Box 24



191
New
Box 69



193
Box 68


193
New
Box 32


194
Box 22


195
Box 33


197
Box 98 railing


198
Box 21


199
Box 27


201
Box 65


203
Box 67


204
Box 39


205
Box 28


207
Box 29



208
Box 73


209
Box 30


Led strips



216
Fine 64



217
Fine 48


219
New
Fine 97


220
Fine 84


221
Fine 69


222
Fine 41


223
Fine 31


224
New
Fine 92


225
New
Fine 82


226
New
Fine 68


227
New
Fine 79


228
Fine 61



229
Fine 76


231
Fine 52



233
Fine 96



234
Fine 56


235
New
Fine 30


237
Fine 51


238
New
Fine 75



239
Fine 32 N



240
New
Fine 88



241
Fine 49



242
Fine 55


243
New
Fine 37


245
Fine 44


247
Fine 63


248
Fine 36


249
Fine 42

251  Fine 54


253  Fine 46

254  Fine 43

255 Fine 50

257  New Fine 60

259  New Fine 66 N

261  Fine 71

262  Fine 47


263  Fine 45

265  Fine running

267  Fine SPI-2

269  Fine SPI-3

271  Fine SPI-4

273  Fine DMX-4

275  Fine DMX-5

279 Fine 25

281 New Fine 34

283 New Fine 77

285 Fine 70

287 Fine 72

289 Fine 74

291  New Dynamic control

294-295 tuya New Tuya

296-299 CASAMBI New Casambi

300-302  Control

301 SPI SPI

301 DMX DMX

303-304 DALI New Dali

307  New Sensor

308-309  New Power supplies 24V

310-311  New Led strips accessories

Three phase track

316-319  Three phase track

321  Picolo 3PH

323  Picolo GU10 3PH

323  Picolo AR111 3PH

325  Cookie 3PH

327  Zoom 3PH

329  Aston 3PH / Konic 3PH

331  Tram 3PH

333  Kom 3PH

335  Lonja 3PH

337  Crown 3PH

339  Alfa 3PH

341  Lena 3PH

343  Sono 3PH


Magnet track mini



Magnet track mini



Picolo 48V mini



Atmos slim 48V mini




Zoe 48V mini



Zoe 48V mini susp.




Sphere 48V mini




Sphere 48V mini susp.



Concord 48V mini



Tram 48V mini



Line 48V mini

Magnet track



Magnet track 48V




Power supplies 48V



Casambi control




Alp 48V



Alp 48V suspension



Mini Bora 48V




Bora 48V suspension



Tram 48V



Curve tram 48V




Line 48V




Curve line 48V




Diro 48V



Zoe 48V suspension



Hat 48V suspension



Sphere 48V



Sphere 48V susp.




Volt 48V




Dot 48V



Cookie 48V



Cookie 48V susp.



Fine 25 circle 48V

Outdoor track



Outdoor Track IP



Power supplies 48V IP



Frame 48V IP



Atmos slim 48V IP



Bit 48V IP



Ice 48V IP

Recessed

409 
Argo recessed

411 
Atom recessed

413 
Micro Zoom recessed

415 
Nano Pulsar recessed

415 
Nano Pulsar trim

415 
Nano pulsar surface

417 
Pulsar dimm recessed

417 
Pulsar trim

417 
Pulsar surface

419 
Nano Oxo recessed

421 
Mini Oxo recessed

423 
Mini Oxo rect recessed

425 
Oxo dimm recessed

427 
Bora recessed

429 
New
Tram recessed

431 
Compac recessed

433 
Pulcom recessed

435 
Pulcom led accessory

435 
Pulcom trim

435 
Pulcom surface

437 
Tao recessed

439
Noi recessed

441-443 
New
Thessis recessed

445
Air recessed

447 
Bonn recessed

449 
Fijo recessed

449 
Basculante recessed

449 
Eclipse recessed

451 
One recessed

451 
Zio recessed

453 
Luk recessed

455 
Bathroom recessed

455 
Rok recessed

457 
Avant recessed

Surface


460-461 
Golf surface

463
Bora surface

465 
Alp surface

467
Plus surface

469 
Concord surface

471 
Rubyc surface

473 
Volt base

475 
Volt 3 surface

476 
Volt GU10 base

477 
Volt 3 GU10 surface

479 
Picolo base

481 
Picolo GU10 surface

481 
Picolo AR111 surface

483 
Crown base

485-487
Kora surface


489 
Nox surface


491 
One surface

491 
Zio surface


491 
Avant surface

Suspension

499  Alp space

501  Bora space

503  Lievo space

505  Zoe space


507-509  Side base / Front base

511  Ark suspension


513  Atmos slim susp.

515  Atmos suspension

517  Atmos GU10 susp.

519  Zoe suspension


521  New Hat suspension

523  Bora suspension

525  Cookie susp. base


527  Tot suspension


Wall


531  Lao

533  Ilo

533  Skin


535  Port


535  Grow


535  Steps

537  Polo

537  Luky


539  Ina

539  Dis

539  Nix

541  Mis wall

543  Pun

545  Artis wall

547  Tween

549  Pure wall

551  Sweet wall

553  Beam wall


555  Mac wall

557  Mac wall base

559  New Lek sensor

561  Lek wall

563  Icon wall


565  Clos wall

567  Neo

569  Neo sensor


571  Oma


573  New Tron


575  Sphere wall

575  Sphere alp wall

579  Comet

581  Zibor

581  Selen

583  Blis

585  Sunset

587  Sunset XL

589  New Pla

591  One GU10 wall

593  Zio GU10 wall

Portable and table

597  Bag

599  New Bimba

601  Converse

603 Madi

605  Visor portable

607  Stem

Outdoor

611  Optic

613  New Sigma

615  New Caddie

615  New Fade

617  New Zas

619  Nik

621  Signal

623  New Sair

625  Fix

627  Wech

629  Sky spike

630-631  Sky switch

633  Sky sensor

634-635  Sky

637  Polaris

639  Krion

641  Clos base

643 Cam

645  Mac floor

647  Tura

649  New Twist

651  Gam


653  Popa

655  Proa

657  Egna

659  Iris

661  Visor solar

663  New Sky solar sensor

Industrial

666-667  Ufo Lens switch

668-669  Ufo Lens Dali

673  Ufo 300W

Retrofit

676

Tutto MR11 / GU10

677

Hook GU10 /dimm.

678

Uniform-line MR16 / GU10 / dimm.

679

Narrow GU10 dimm.

680

System MR16 / GU10 /dimmable

681

R-63 s-line GU10

682

Power MR16 / GU10 / dimmable

683

Lynk G53 / GU10 / dimmable

684

AR111 15° G53 / GU10

685

Nitro GU10 / Dole GU10

686

Shop E14 / Prisma E14

687

Flama E14 / E27 / dimmable

688

Esférica E14 / E27 / dimmable

689-691

Standard E27 / dimmable

692-693

Globo E27 / dimmable

694

R-39 E14

694

R-50 E14

694

R-63 E27

695

R-80 E27

695

R-90 E27

696

Pl T40 E27

697

Par 30 E27

697

Par 38 E27

697

Par 38 Green E27

698

Sil E27

699

Aria E27 / E40

700-701

Obo E27 / E40

702

Smile E27 / E40

703

Cup E27 / E40

704

Noa E27 / E40

705

Adn G4

706

Uniform-line G4

707

Uniform-line G9

708

Max BA15d

709

Cala G24

710-711

Lineal tubular R7S / dimmable

711


Lineal R7S


712

HQI tubular E27 / G12

712

HQI tubular RX7S

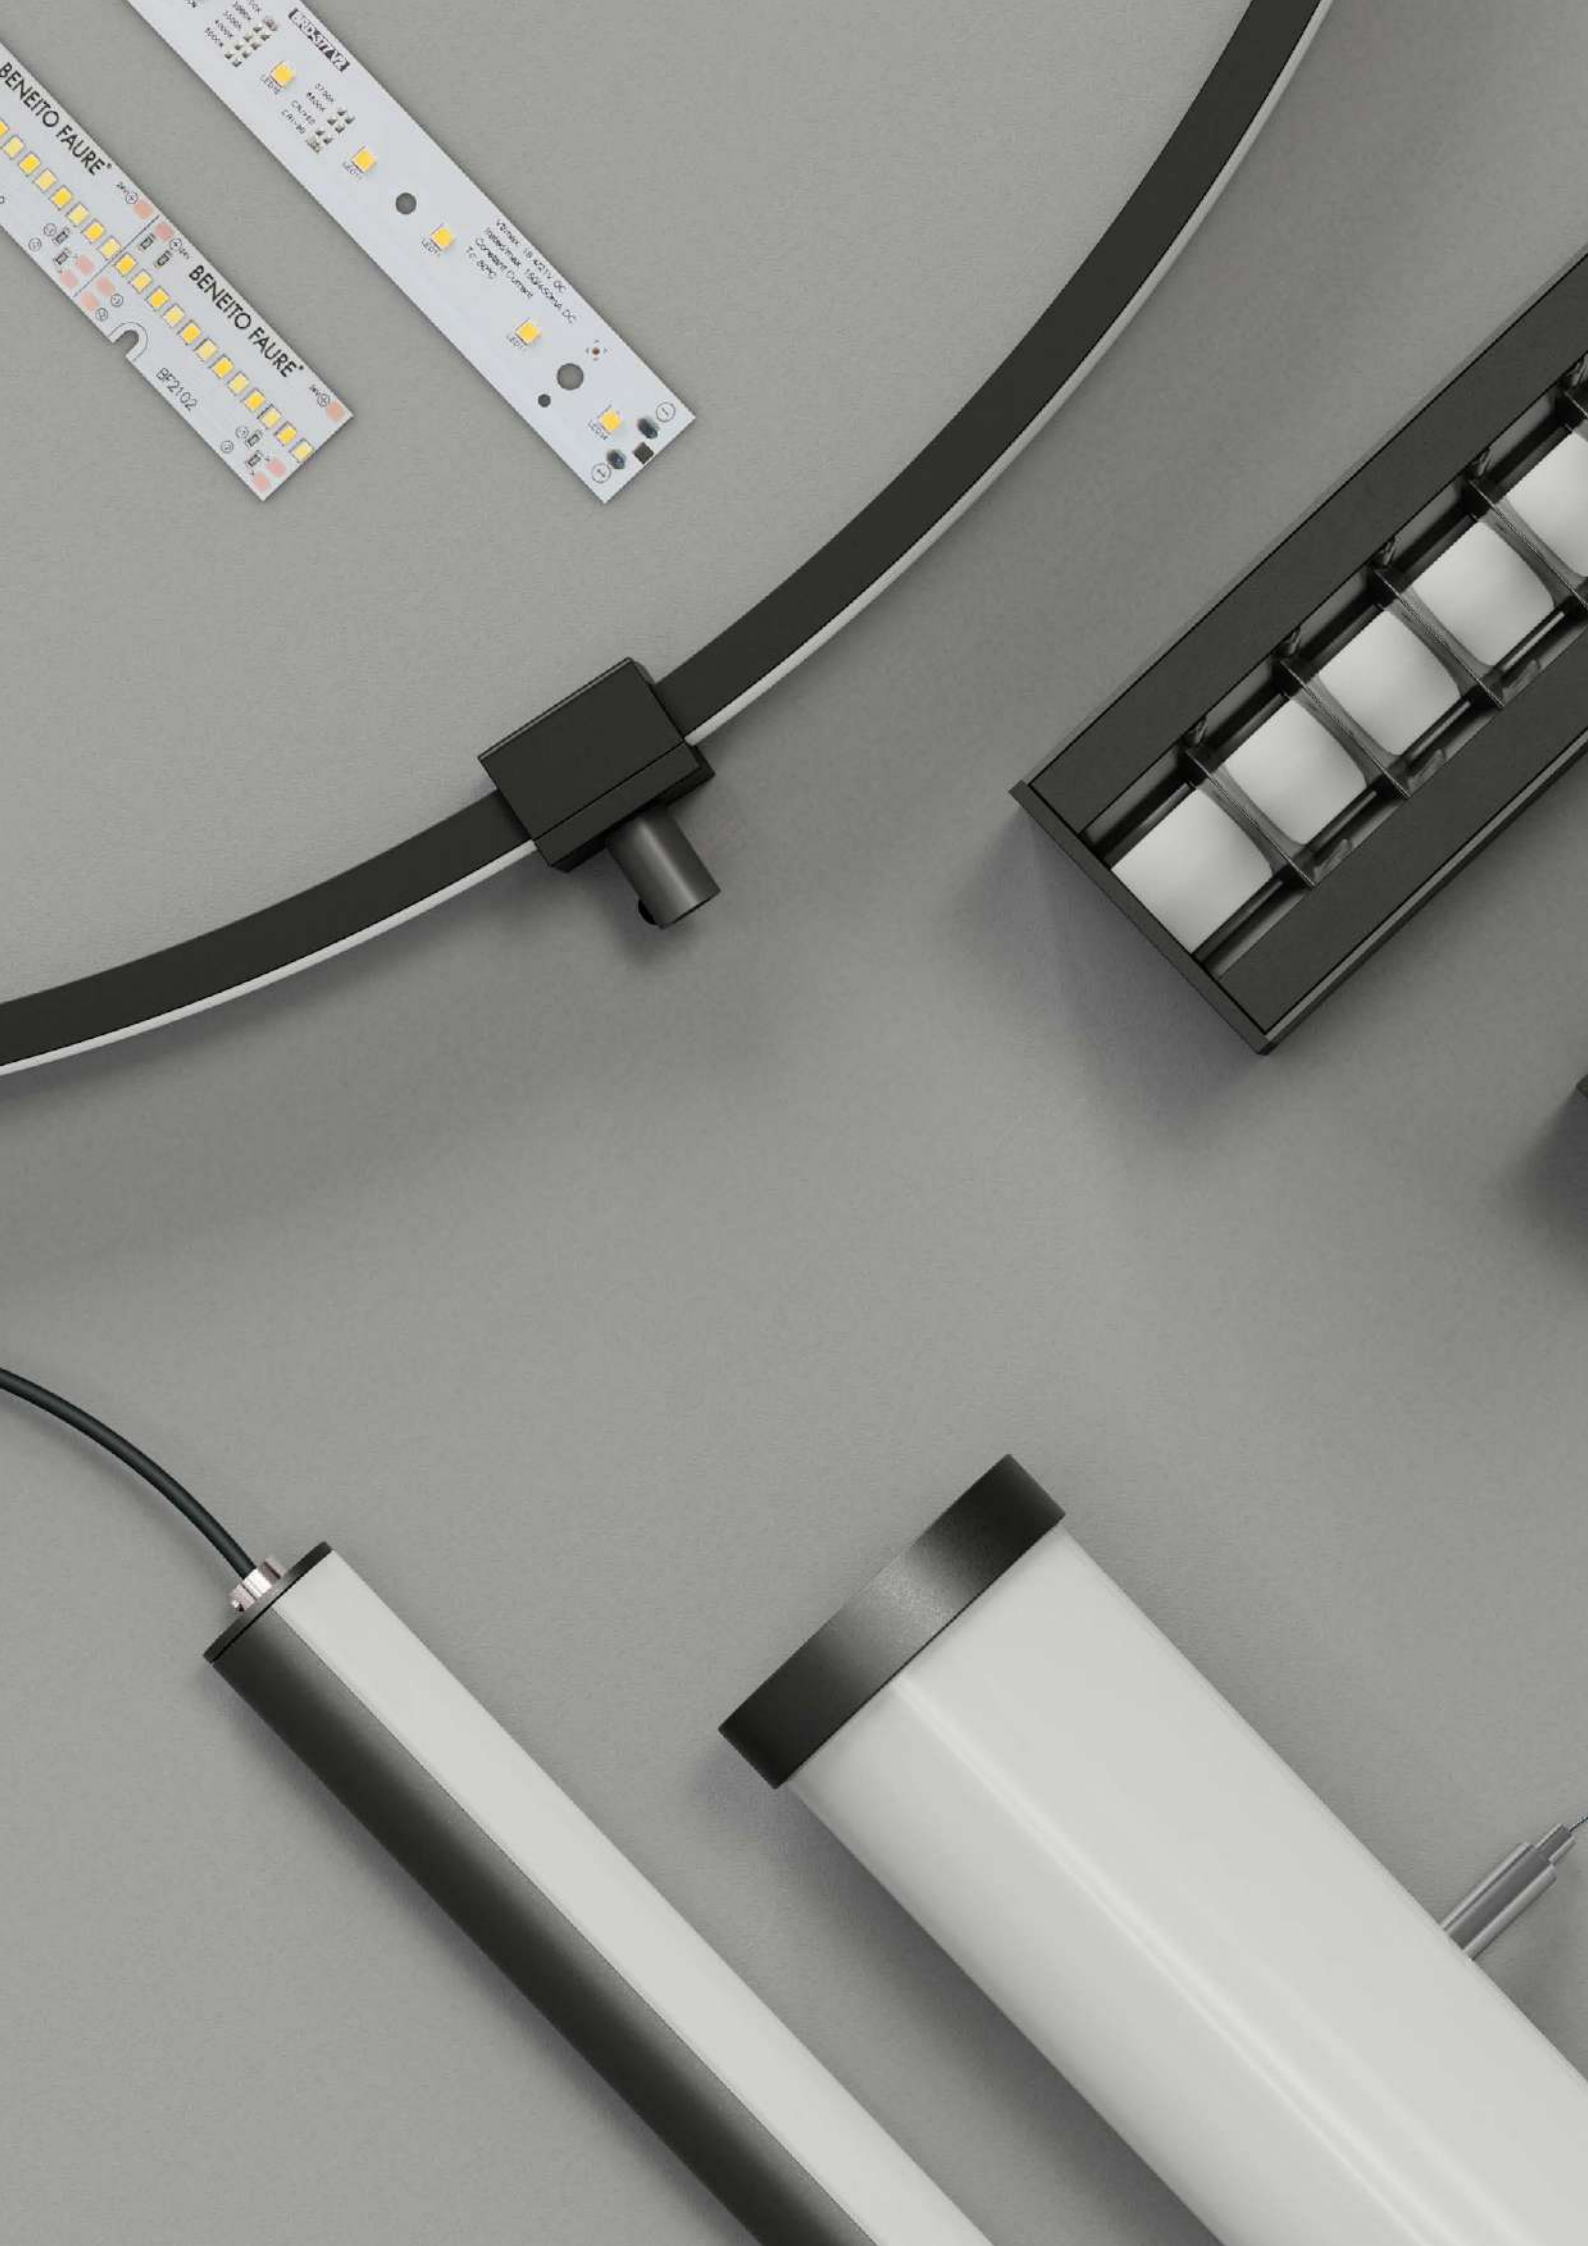
BENEITO FAURE
BENEITO FAURE
BF2102

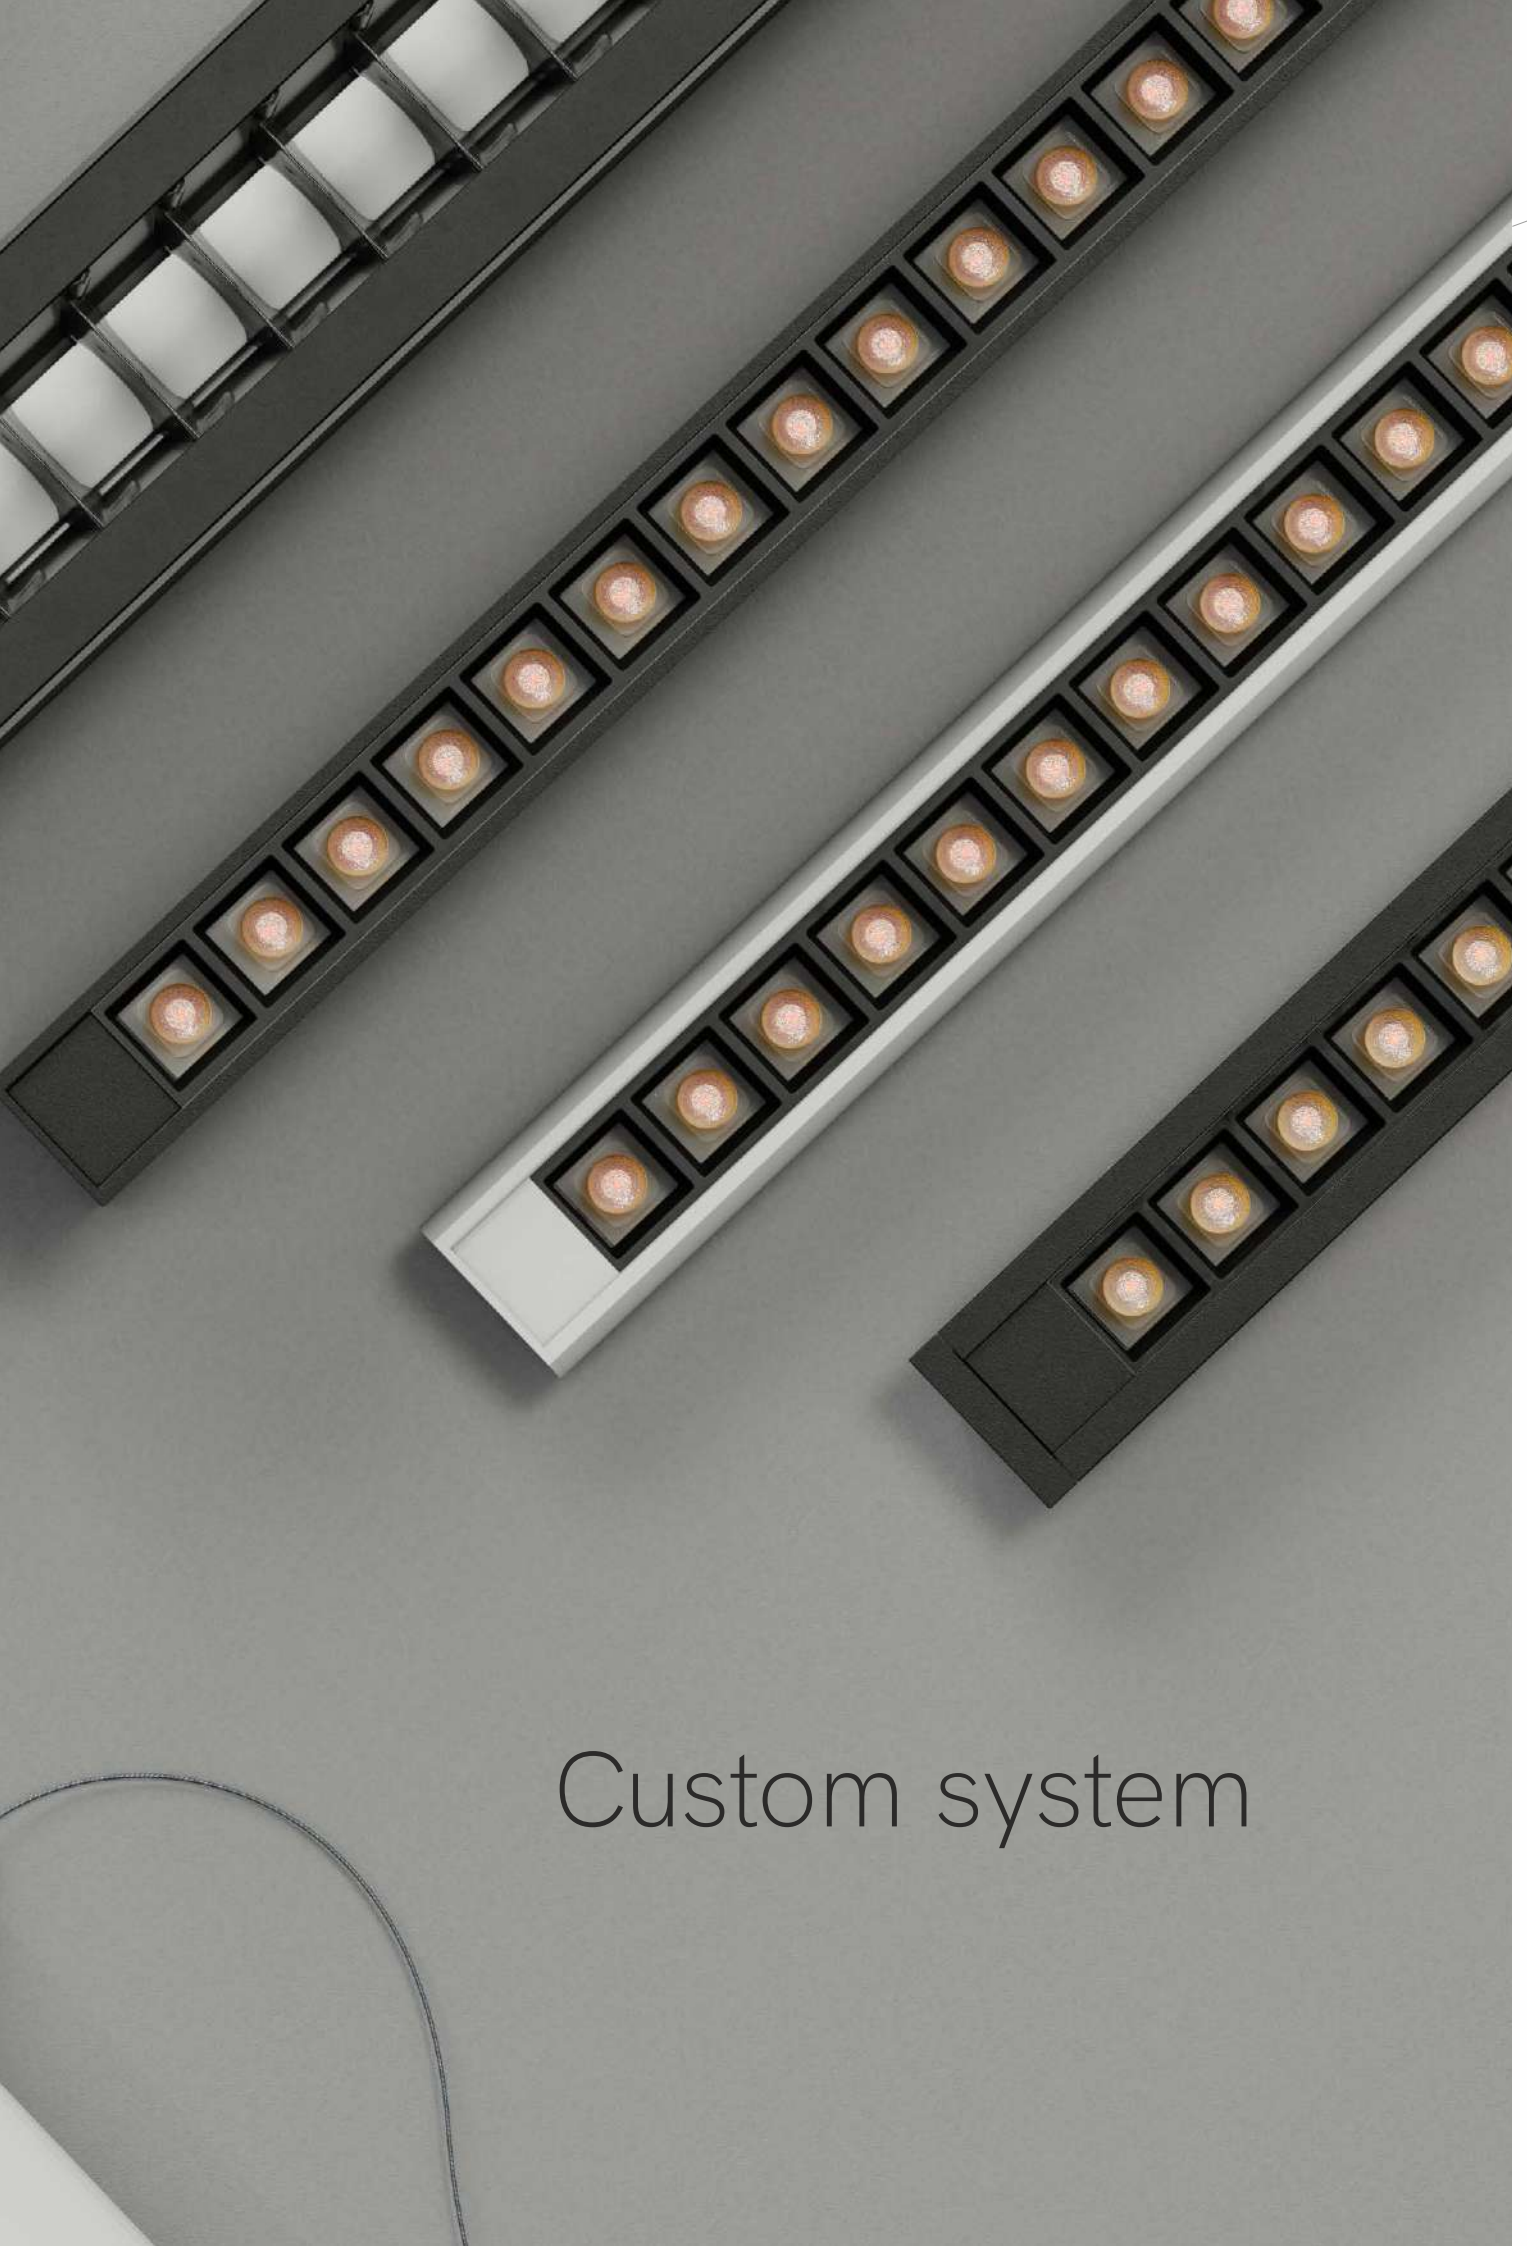

Custom system

The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:
- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
- Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
- Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
- Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
- Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
- Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
- Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.


When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality.
Contact us and find out how we can help you achieve your goals!


Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.


Nuestros servicios de I+D destacan por:
- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adapten perfectamente a sus requerimientos.
- Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
- Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
- Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
- Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
- Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
- Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.

Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!


BENEITO FAURE

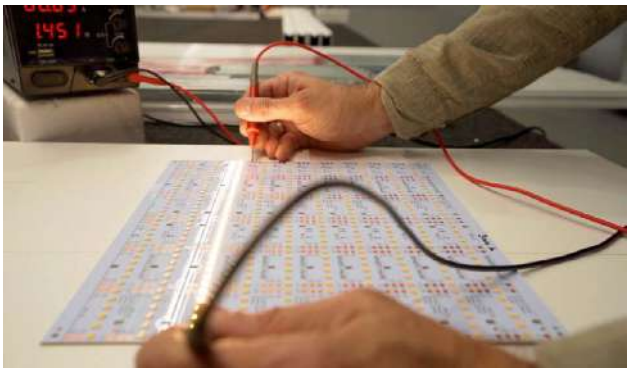

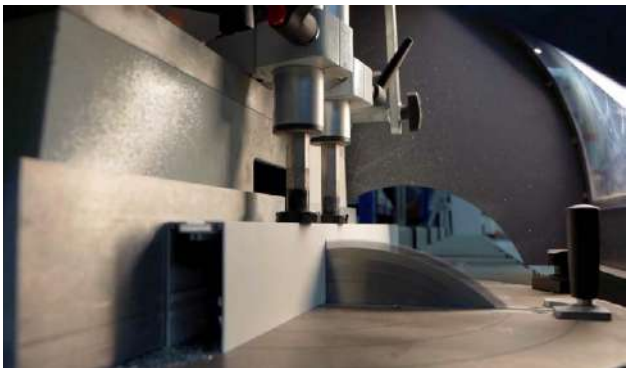


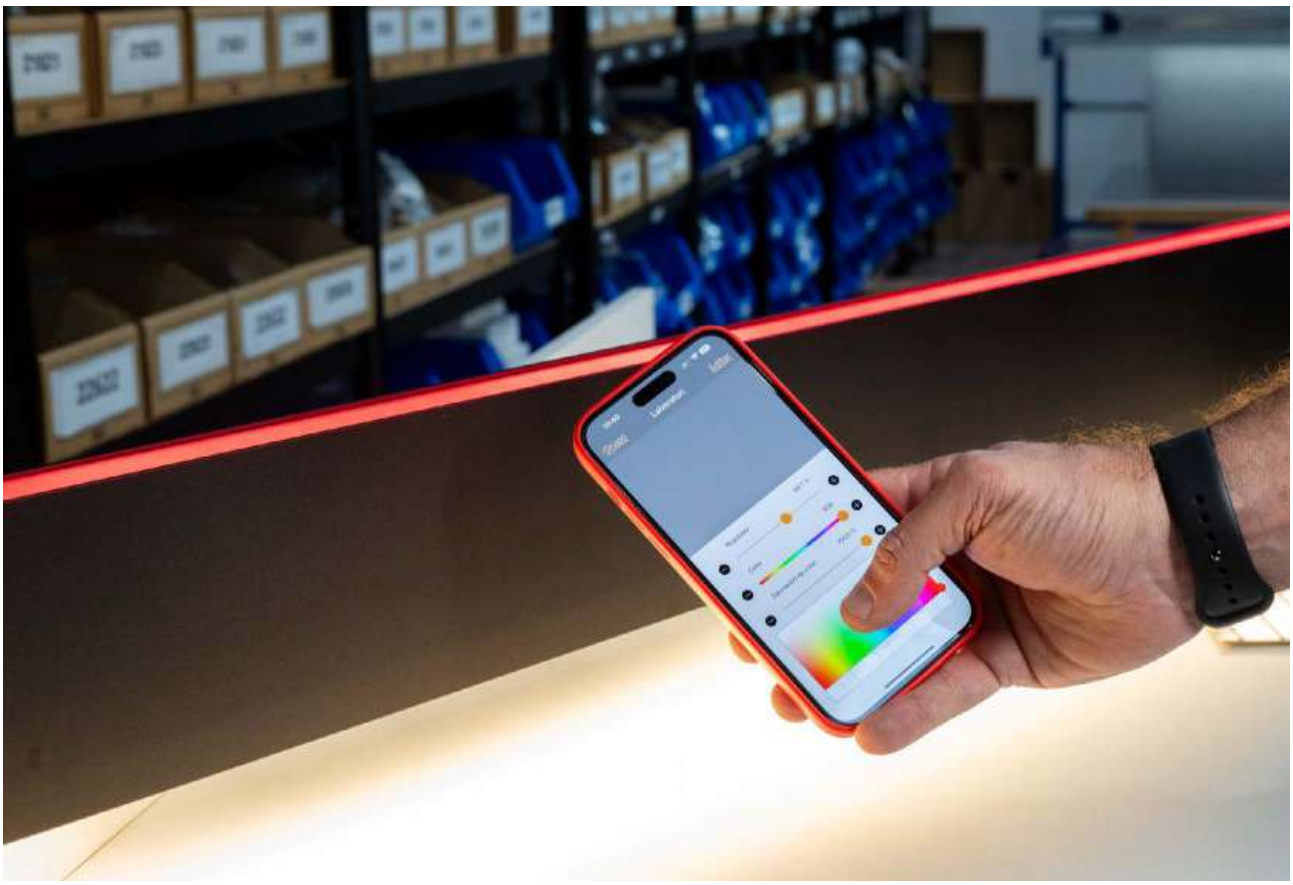



Do you want a custom-made **luminaire**?

Look for the Cutting symbol and consult our sales department!



Customization of the cut and
handling to the requested size.



Do you want to customize **your luminaires**?

Look for the Custom RAL or Custom Blaber symbol and consult our sales department!



Custom RAL



Custom Blaber

	Model	Page	Power	Section Size	Installation
	EVO	37	38W/47W/56W/74W	28x60 mm	Pendant
	EVO FLY	39	44W/55W/66W/77W	24x75 mm	Pendant
	EVO DUAL	41	49W/61W/73W/86W	24x75 mm	Pendant / Wall
	EVO MINI	43	38W/47W/56W/74W	28x25 mm	Surface / Pendant
	EVO R	43	38W/47W/56W/74W	35x25 mm	Surface / Pendant
	EVO E	45	10W/21W/31W/42W 52W/63W/73W	34x25 mm	Recessed
NEW	EVO MINI TRACK	47	9W/18W	28x25 mm	Track
	EVO TRACK	49	38W/56W	90x57 mm	Track
	URBAN	52	46W/57W/69W/ 80W/103W	58x68 mm	Surface / Pendant
	URBAN E	55	46W/57W/69W/ 80W/103W	75x68 mm	Recessed
NEW	URBAN TRAIN E	57	46W/57W/69W/80W	75x68 mm	Recessed
	URBAN TRAIN	57	46W/57W/69W/80W	58x68 mm	Pendant
NEW	URBAN FLY E	59	2X14W/3X14W 4X14W/6X14W	75x68 mm	Recessed
	URBAN FLY	59	2X14W/3X14W 4X14W/6X14W	58x68 mm	Pendant
NEW	URBAN WORK E	61	35W/43W/51W/ 59W/97,5W	75x68 mm	Recessed
	URBAN WORK	61	35W/43W/51W/ 59W/97,5W	58x68 mm	Pendant
NEW	URBAN ASYMMETRIC E	63	25W/31W/37W/ 43W/55W	75x68 mm	Recessed
	URBAN ASYMMETRIC	63	25W/31W/37W/ 43W/55W	58x68 mm	Surface / Pendant
	URBAN WALL SENSOR	64	21W/32W/43W	58x68 mm	Wall
	URBAN TRACK	65	21W/32W/43W	58x68 mm	Track
	URBAN MARKET	67	45W/55,5W/66W/ 76,5W/97,5W	58x68 mm	Surface / Pendant
NEW	QUICK	69	20W/30W/41W/ 51W/61W/71W	60x86 mm	Wall
NEW	LIFT	71	33W/42W/51W/59W 16W/27W/35W	35x61,7 mm	Pendant / Wall
NEW	VISION	73	33W/42W/51W/59W	30x35 mm	Surface / Pendant
	TIME E	75	31W/46W/69W	54x75 mm	Recessed
	TIME	75	31W/46W/69W	39x75 mm	Surface / Pendant

CRI	CCT	IP	Standard finishes
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥80 CRI	2700K 3000K 4000K RGB-W	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black Gray Matt Gold Corten Copper
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black Gray
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K	20 IP	White Black Gray
≥95 CRI	2700K 3000K 4000K 5000K CCT	20 IP	White Black
80/93 CRI	3000K MEAT R HAM MEAT M 4000K FISH FRUIT BREAD	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB CCT	20 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K	40 IP	White Black Gray
≥95 CRI	2700K 3000K 4000K 5000K	40 IP	White Black Gray

	Model	Page	Power	Section Size	Installation
	NEXUS	77	46W/70W	39x75 mm	Pendant
	DUAL	79	18-24W/28-35W/ 46-52W	39x125 mm	Pendant
	FOREST	81	31W/38W/46W/53W	64x95 mm	Pendant
	TIME WALL SENSOR	83	15W/23W/31W	39x75 mm	Wall
	TIME TRACK	85	15W/23W/31W	39x75 mm	Track
	KUBO E	87	31W/38W/46W/54W	50x35 mm	Recessed
	KUBO	87	31W/38W/46W/54W	36,5x34 mm	Surface / Pendant
	MIRROW	89	85W/94W	36,5x33,5 mm	Pendant
	TAX	91	52W/64W	36,5x33,5 mm	Pendant
	FILTER	93	32W/120W	Ø60 mm	Pendant
	TUBI	95	35W/44W/53W/62W	Ø62 mm	Pendant
	TUBI WALL	97	35W/44W/53W	Ø62 mm	Wall
	GRIP	99	26W/33W/39W/46W	Ø28 mm	Pendant
	NYNETO	101	16W/20W/24W/28W	10x12 mm	Pendant
	MINIMUS	103	25W/31W/37W/43W	16x25 mm	Surface / Pendant
	DAU E	105	18W/23W/26W/30W	34x25 mm	Recessed
	DAU	105	18W/23W/26W/30W	25x25 mm	Surface / Pendant
	SQUARE	107	43W/62W	25x25 mm	Pendant
NEW	ZERO IN XL	109	37W/65W/94	21x38 mm	Pendant
NEW	ZERO OUT XL	111	37W/65W/94	21x38 mm	Pendant
	ZERO IN	113	26W/44W/63W/96W	11x30 mm	Pendant
	ZERO OUT	115	26W/44W/63W/96W	11x30 mm	Pendant
NEW	CIRCUS IN XL	117	37W/65W/94W	38x21 mm	Pendant
NEW	CIRCUS OUT XL	117	37W/65W/94W	38x21 mm	Pendant
	CIRCUS IN	119	26W/44W/63W	30x11 mm	Pendant
NEW	CIRCUS OUT	119	26W/44W/63W	30x11 mm	Pendant

CRI	CCT	IP	Standard finishes
≥95 CRI	CCT	40 IP	White, Black, Gray
≥95 CRI	2700K, 3000K, 4000K, 5000K	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	Wood
≥95 CRI	2700K, 3000K, 4000K, 5000K	20 IP	White, Black, Gray
≥95 CRI	2700K, 3000K, 4000K, 5000K	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, RGB-W, CCT	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, RGB-W, CCT	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, RGB	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, RGB-W, CCT	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, RGB-W, CCT	40 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, RGB, CCT	40 IP	Black
≥90 CRI	2700K, 3000K, 4000K	20 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K	40 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, 5000K, RGB-W, CCT	20 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, 5000K, RGB-W, CCT	20 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver


	Model	Page	Power	Section Size	Installation
	TUNDRA	121	77W/112W	21x38 mm	Pendant
	ZERO DIRECT XL	123	78W/105W/131W	95x90 mm	Pendant
	ZERO DIRECT	125	35W/55W/75W/94W 189W	36,5x33,5 mm	Surface / Pendant
	ZERO DESIGN	126-127	22W/m	36,5x33,5 mm	Surface / Pendant
	ZERO DUAL	131	107W/162W/325W	50x60 mm	Pendant
	KAA	133	90W/180W/300W	Ø25 mm	Pendant
	KAA LINE	135	30W/60W/100W	Ø25 mm	Pendant
	HORIZON	137	48W-288W	15 mm	Pendant
	FLASH	139	16W/27W/35W/ 46W/55W	18x49 mm	Wall
	TRITON	141	21W/41W/61W	47x66 mm	Surface
	TRITON DOWN	143	46W/57W/69W/ 80W/103W	47x66 mm	Surface / Pendant
NEW	BLABER PICK	147	25W/30W/34W/38W	20x22,5 mm	Pendant
	BLABER LINE	149	30W/39W/49W	54x300 mm	Pendant
	BLABER R	151			Pendant
NEW	BLABER CUSTOM	151			Pendant
	BLABER SQ	152			Pendant / Armstrong
NEW	BLABER MIRROW	153	85W/94W		Pendant
NEW	BLABER EVO	153			Pendant
NEW	BLABER ZERO DIRECT	155	35W/55W/75W		Pendant
NEW	BLABER ZERO IN XL	155	37W/65W/94W		Pendant
NEW	BLABER MAC	157	23W/33W/45W		Wall
NEW	BLABER ATMOS	159	10W		Pendant
NEW	BLABER ATMOS SLIM	159	6W		Pendant
	BLABER TRGL	161			Pendant
NEW	BLABER TAX	161	52W/64W		Pendant

CRI	CCT	IP	Standard finishes
≥80 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥80 CRI	2700K 3000K 4000K	20 IP	White Black Gray
≥80 CRI	2700K 3000K 4000K CCT	20 IP	White Black Matt Gold Silver
≥80 CRI	2700K 3000K 4000K CCT	20 IP	White Black Gray Matt Gold
≥80 CRI	3000K 4000K	20 IP	White Black
≥90 CRI	2400K 2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2400K 2700K 3000K 4000K RGB-W CCT	40 IP	White Black Matt Gold
≥90 CRI	2700K 3000K 4000K	20 IP	White Black
≥80 CRI	2700K 3000K 4000K 6000K	20 IP	White Black Alum.
≥80 CRI	2700K 3000K 4000K	65 IP	Black
≥95 CRI	2700K 3000K 4000K 5500K	65 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	
≥90 CRI	2700K 3000K 4000K	40 IP	
	2700K 3000K 4000K RGB-W CCT		
	2700K 3000K 4000K RGB-W CCT		
	2700K 3000K 4000K CCT		
	2700K 3000K 4000K RGB-W CCT		
	3000K 4000K RGB-W		
	2700K 3200K 4000K		
	CCT		



Evo





Equipment

Ø60x28mm



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.268 lm - 8.954 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	2	Black Slats (60°)	N	1.170mm	2	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (60°)	P	N 1.450mm	3	3.000K (96-109 lm/W)	3	Dali	2	Black (9005)	2
				1.730mm	4	4.000K (103-121 lm/W)	4	Push	3	ⓘ Custom RAL	C
				2.290mm	6	N RGB-W (86 lm/W)	8	Casambi	5		
						N 2.700-6.500K (95/105 lm/W)	9	N Tuya	7		

Code: 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | tuya | PUSH | DALI 2



Evo fly





Equipment

Ø60x28mm



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	44W / 55W / 66W / 77W
Lumens	3.872 lm - 9.317 lm
Installation	Pendant
Material	Aluminium
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Down Black Slats (60°) Up Opal N	1.120mm (44W) 4	2.700K Down (91-104 lm/W) Up (88 lm/W) 2	On / Off 1	White (9003) 1
	Down White Slats (60°) Up Opal P	1.400mm (55W) 5	3.000K Down (96-109 lm/W) Up (92 lm/W) 3	Dali 2	Black (9005) 2
		1.680mm (66W) 6	4.000K Down (104-121 lm/W) Up (96 lm/W) 4	Push 3	① Custom RAL C
		1.960mm (77W) 7	N 2.700K 6.500K Down (95-105 lm/W) Up (100 lm/W) 5	Casambi 5	

Code: 4

CE RoHS EAC

① Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2




Evo dual






Equipment

Ø60x28mm



Evo dual wall





Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

Evo dual wall

Evo dual

Technical Information

Power	49W / 61W / 73W / 86W
Lumens	4.410 lm - 11.696 lm
Installation	Pendant / Wall
Material	Aluminium
PCB	Flex / Rigid

Code		Installation		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	5	Pendant	3	1.130mm (49W)	4	Down-Up 2.700K (124 lm/W)	2	On / Off	1	White (9003)	1
		Wall	7	1.410mm (61W)	5	Down-Up 3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (73W)	6	Down-Up 4.000K (136 lm/W)	4	Push	3	Custom RAL	C
				1.970mm (86W)	7	Down-Up RGB (100 lm/W)	8	Casambi	5		
						Down-Up 1.800-4.000K (90 lm/W)	9	Tuya	7		
						Down 1.800-4.000K Up RGB	C				
						Down 2.700K Up RGB	D				
						Down 3.000K Up RGB	T				
						Down 4.000K Up RGB	Q				


Code: 5

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥80 | 2x90° | 1,96m Max | tuya | PUSH | DALI 2

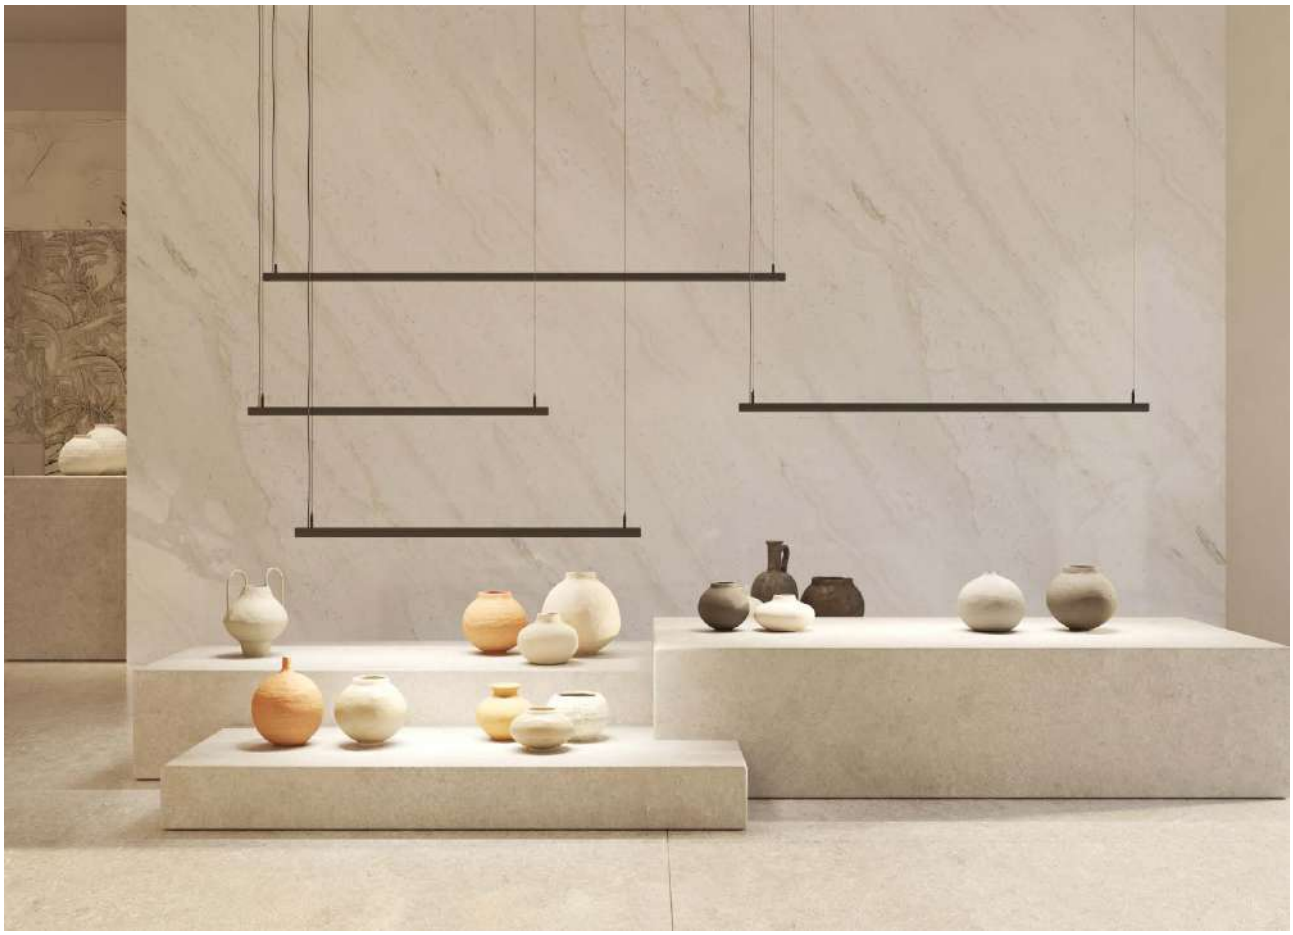




Evo mini






Evo R






Equipment

Codes **8** and **3** recessed driver

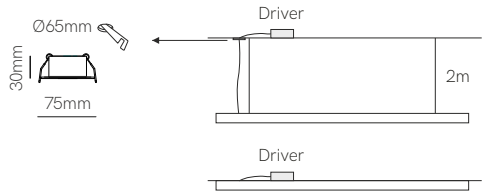

Codes **1** and **7** surface driver



Evo mini Evo R

Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.458 lm - 8.954 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Evo mini recessed	8	Black Slats (60°)	N	1.170mm	2	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
N Evo mini surface	1	White Slats (60°)	P	N 1.450mm	3	3.000K (96-109 lm/W)	3	Dali	2	Black (9005)	2
Evo r recessed	3			1.730mm	4	4.000K (103-121 lm/W)	4	Push	3	ⓘ Custom RAL	C
N Evo r surface	7			2.290mm	6	N 2.700-6.500K (95-105 lm/W)	9	Casambi	5		
								N Tuya	7		

Code:


CE RoHS EAC


ⓘ Consult delivery terms and conditions.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | tuya | PUSH | DALI 2




Evo E

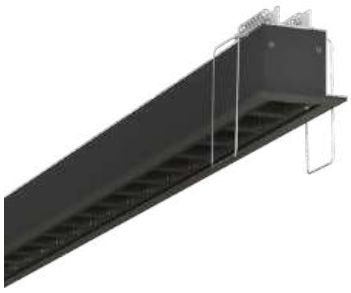







Control accessories pages 294-307.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Technical Information

Power	10W / 21W / 31W / 42W / 52W / 63W / 73W
Lumens	860 lm - 8.833 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	5	N Black Slats (30°)	C	280mm	1	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		N White Slats (30°)	F	560mm	2	3.000K (96-109 lm/W)	3	Dali	2	Black (9005)	2
		Black Slats (60°)	N	840mm	3	4.000K (104-121 lm/W)	4	Push	3	ⓘ Custom RAL	C
		White Slats (60°)	P	1.120mm	4	N RGB-W (86 lm/W)	8	Casambi	5		
				1.400mm	5	N 2.700-6.500K (95-105 lm/W)	9	N Tuya	7		
				1.680mm	6						
				1.960mm	7						

Code: 5

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2




New

Evo mini track





Equipment



*Finished luminaire.

Technical Information

Power	9W / 18W
Lumens	819 lm - 2.178 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	6	Black Slats (60°)	N	310mm	1	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (60°)	P	590mm	8	3.000K (96-109 lm/W)	3	Triac	4	Black (9005)	2
						4.000K (104-121 lm/W)	4			① Custom RAL	C

Code: 6

CE RoHS EAC

① Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90









Evo track



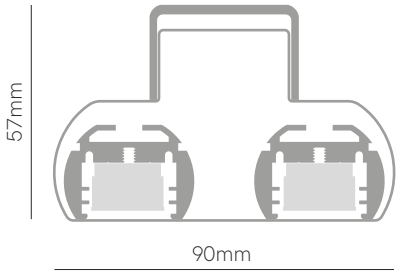

Equipment



*Finished luminaire.

Technical Information

Power	38W / 56W
Lumens	3.458 lm - 6.776 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	9	Black Slats (30°)	C	610mm	2	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (30°)	F	890mm	3	3.000K (96-109 lm/W)	3			Black (9005)	2
		Black Slats (60°)	N			4.000K (103-121 lm/W)	4			ⓘ Custom RAL	C
		White Slats (60°)	P								

Code: 9 _ _ _ 1 _

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,17m Max






Urban collection

Urban

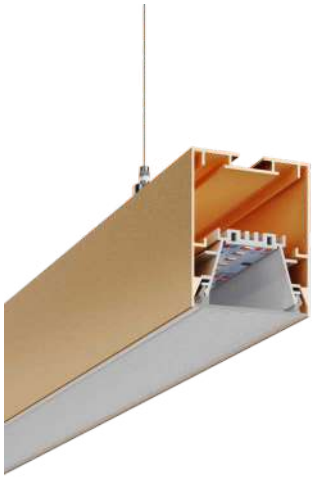



Control accessories pages 294-307.

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	4.830 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	6	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	Push	3	Gray (9006)	3
				1.970mm	6	5.000K (136 lm/W)	5	Casambi	5	ⓘ Matt Gold	4
				2.530mm	7	2.700-5.500K (105 lm/W)	9	Tuya	7	ⓘ Corten	6
										ⓘ Copper	7
										ⓘ Custom RAL	C

Code: 6

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories

End caps
- 40721
- 40722
- 40723



Joint 180°
- 40220



Joint 90°
- 40550



Wall bracket
- 40851
- 40852
- 40853



Trimless
- 40669



Base 3x0,75 (2,5m) Ø60x28mm
- 40881
- 40882
- 40883



Base 5x0,5 (2,5m) Ø60x28mm
- 40991
- 40992
- 40993



Ceiling suspension
- 40780



Suspension Kit
- 40790 (2m)

CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

New

Urban emergency



Code		Diffuser (Angle)		Size		CCT (lm/W)		Emergency + Driver		Colour	
Code	6	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	N Emergency + On / Off	K1	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3	N Emergency + Dali	K2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	N Emergency + Push	K3	Custom RAL	C
				1.970mm	6	5.000K (136 lm/W)	5	N Emergency + Casambi	K5		
				2.530mm	7	2.700-5.500K (105 lm/W)	9				

Code: 6

Emergency
4.000K 200lm | 1/3H.

New

Urban sensor casambi



Urban sensor incorporates a presence and illuminance (brightness) sensor, this works with the CASAMBI wireless control system via Bluetooth.
The equipment can be configured in different ways to activate scenes of any luminaire of the CASAMBI network by presence or illuminance.

Urban sensor incorpora un detector de presencia e iluminancia (luminosidad), este funciona con el sistema de control inalámbrico CASAMBI mediante Bluetooth. El equipo se puede configurar de diferentes maneras para activar escenas de cualquier luminaria de la red CASAMBI por presencia o iluminancia.


Code		Diffuser (Angle)		Size		CCT (lm/W)		Sensor + Driver		Colour	
Code	6	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	N Sensor + Casambi	8	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3			Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4			Custom RAL	C

Code: 6 8



Urban E



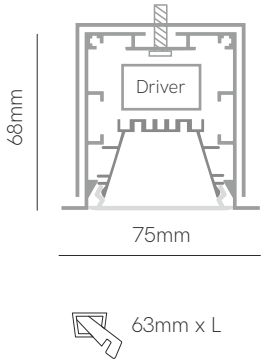

63mm x L

Control accessories pages 294-307.

*Spring clips included.

Technical Information

Power	46W / 57W / 69W / 80W / 103W	Material	Aluminium
Lumens	4.830 lm - 14.008 lm	PCB	Rigid
Installation	Recessed		

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver / Emergency		Colour	
Code	3	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	Push	3	Gray (9006)	3
				1.970mm	6	5.000K (136 lm/W)	5	Casambi	5	Custom RAL	C
				2.530mm	7	2.700-5.500K (105 lm/W)	9	Tuya	7		
								N Emergency + On / Off	K1		
								N Emergency + Dali	K2		
								N Emergency + Push	K3		
								N Emergency + Casambi	K5		

Code: 3

Accessories pages 162-163.

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories

End caps
- 40731
- 40732
- 40733



Joint 180°
40220


Joint 90°
40550

CE RoHS EMC

Emergency
4.000K 200lm | 1/3H.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

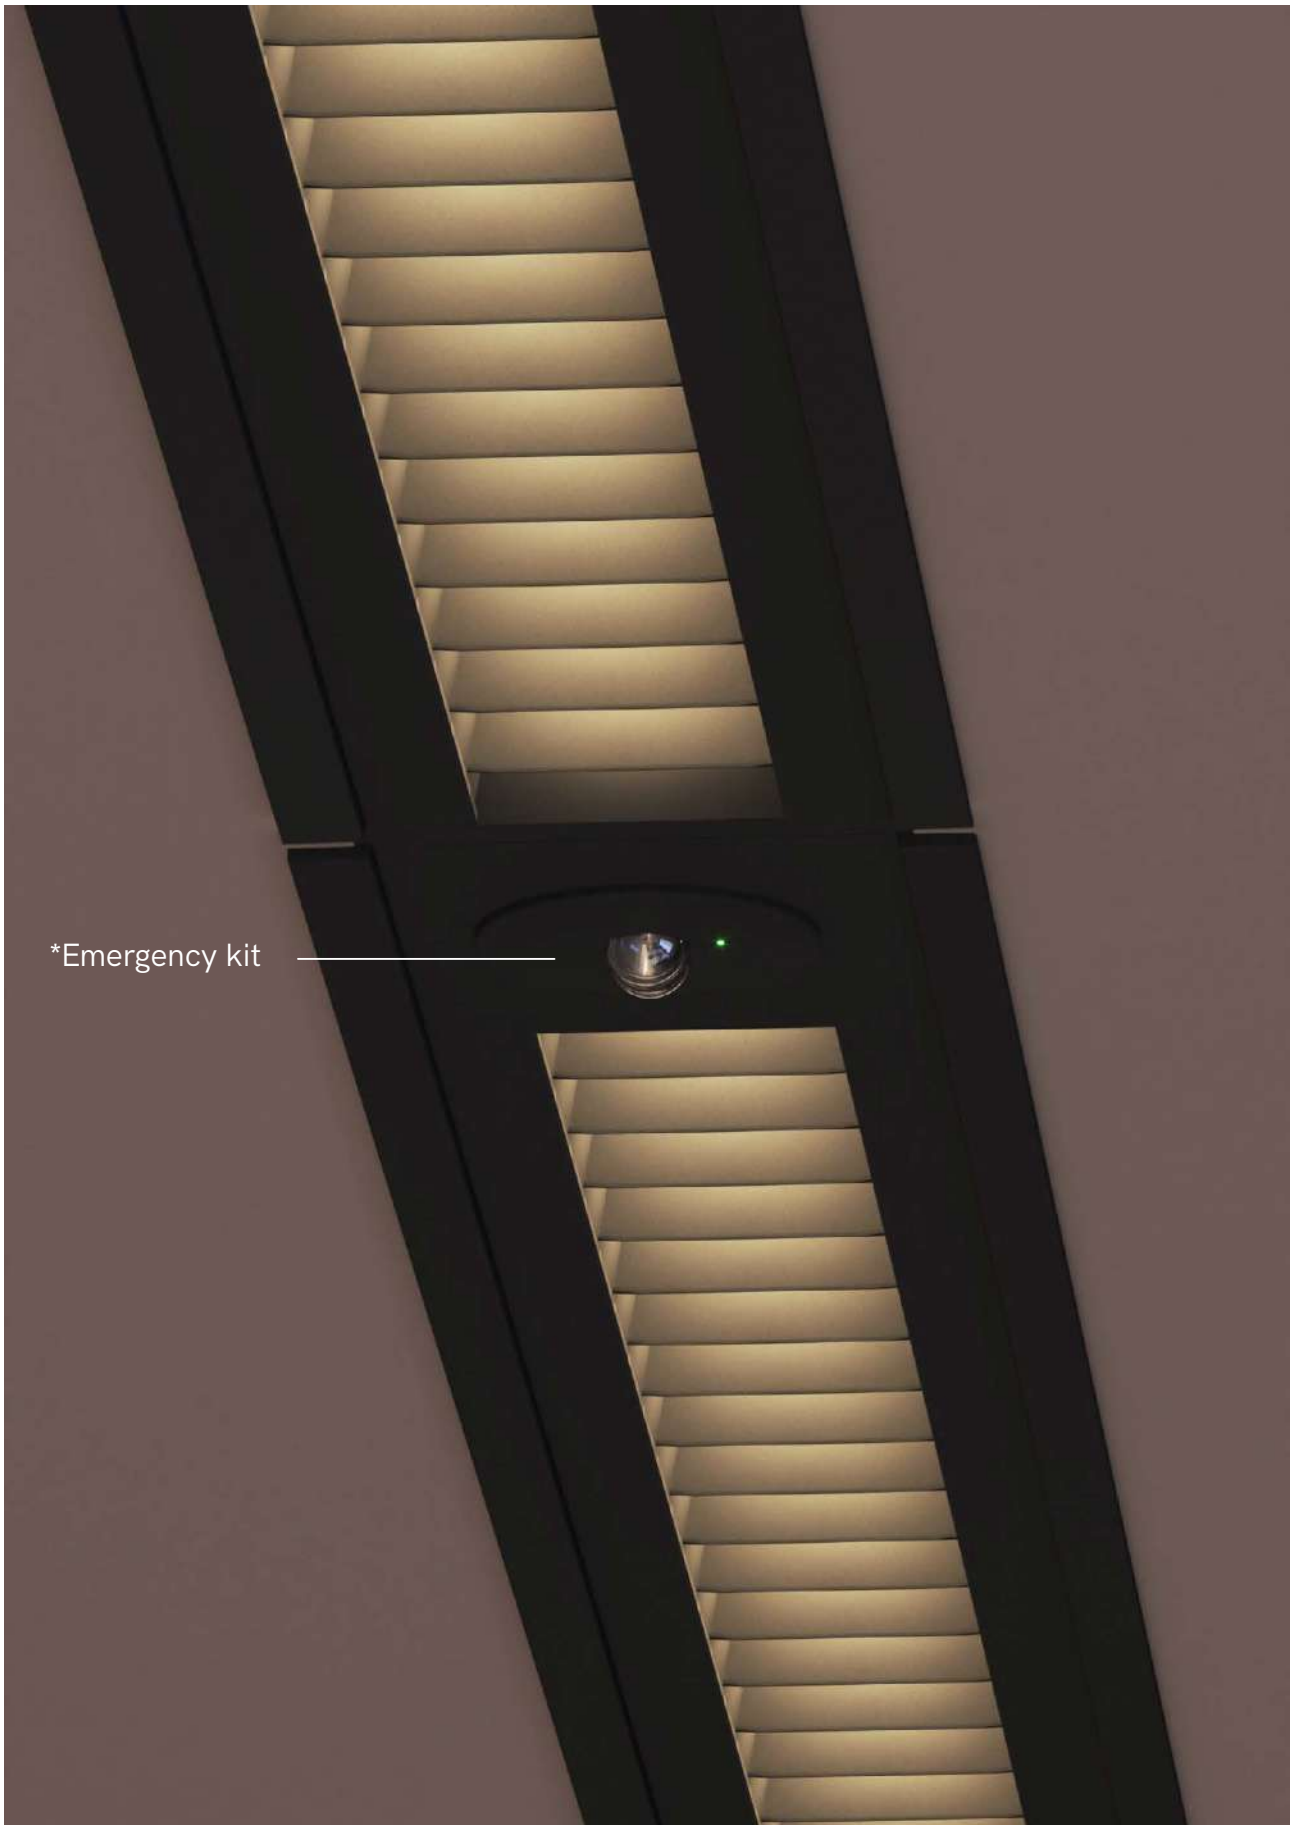


*Optional emergency kit with self-contained luminaire, high luminosity SMD LED with lens ideal for corridors and evacuation routes.

New

Urban train E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban train






*Finished luminaire.
Includes suspension kit, power cable and end caps.

Equipment

Ø60x28mm



Urban train E

Urban train

Control accessories pages 294-307.

Technical Information

Power	46W / 57W / 69W / 80W	Material	Aluminium
Lumens	4.830 lm - 10.880 lm	PCB	Rigid
Installation	Recessed / Pendant		

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver / Emergency		Colour	
Train E	4	Black Slats (62°)	2	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
Train	6	Alum. Slats (84°)	7	1.410mm	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	Push	3	Custom RAL	C
				1.970mm	6	5.000K (136 lm/W)	5	Casambi	5		
						N 2.700-5.500K (105 lm/W)	9	N Emerg.+ On / Off	K1		
								N Emerg.+ Dali	K2		
								N Emerg.+ Push	K3		
								N Emerg.+ Casambi	K5		

Code:

Emergency
4.000K 200lm | 1/3H.

CE RoHS


Accessories pages 162-163. Consult delivery terms and conditions.
*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



New

Urban fly E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban fly





Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

4. 2x14W = 1.130mm

5. 3x14W = 1.690mm

7. 4x14W = 1.130mm

8. 6x14W = 1.690mm

Urban fly E

Urban fly

Control accessories pages 294-307.

Technical Information

Power	2x14W / 3x14W / 4x14W / 6x14W
Lumens	3.192 lm - 11.424 lm
Installation	Recessed / Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver / Emergency		Colour	
Fly E	5	Optical (50°)	9	1.130mm (28W)	4	N 2.700K (114 lm/W)	3	On / Off	1	White (9003)	1
Fly	6			1.690mm (42W)	5	3.000K (130 lm/W)	3	Dali	2	Black (9005)	2
				1.130mm (56W)	7	4.000K (136 lm/W)	4	Push	3	ⓘ Custom RAL	C
				1.690mm (84W)	8			Casambi	5		
								N Emerg.+ On / Off	K1		
								N Emerg.+ Dali	K2		
								N Emerg.+ Push	K3		
								N Emerg.+ Casambi	K5		


Code: 9

CE RoHS

Emergency 4.000K 200lm | 1/3H.

Accessories pages 162-163. ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2

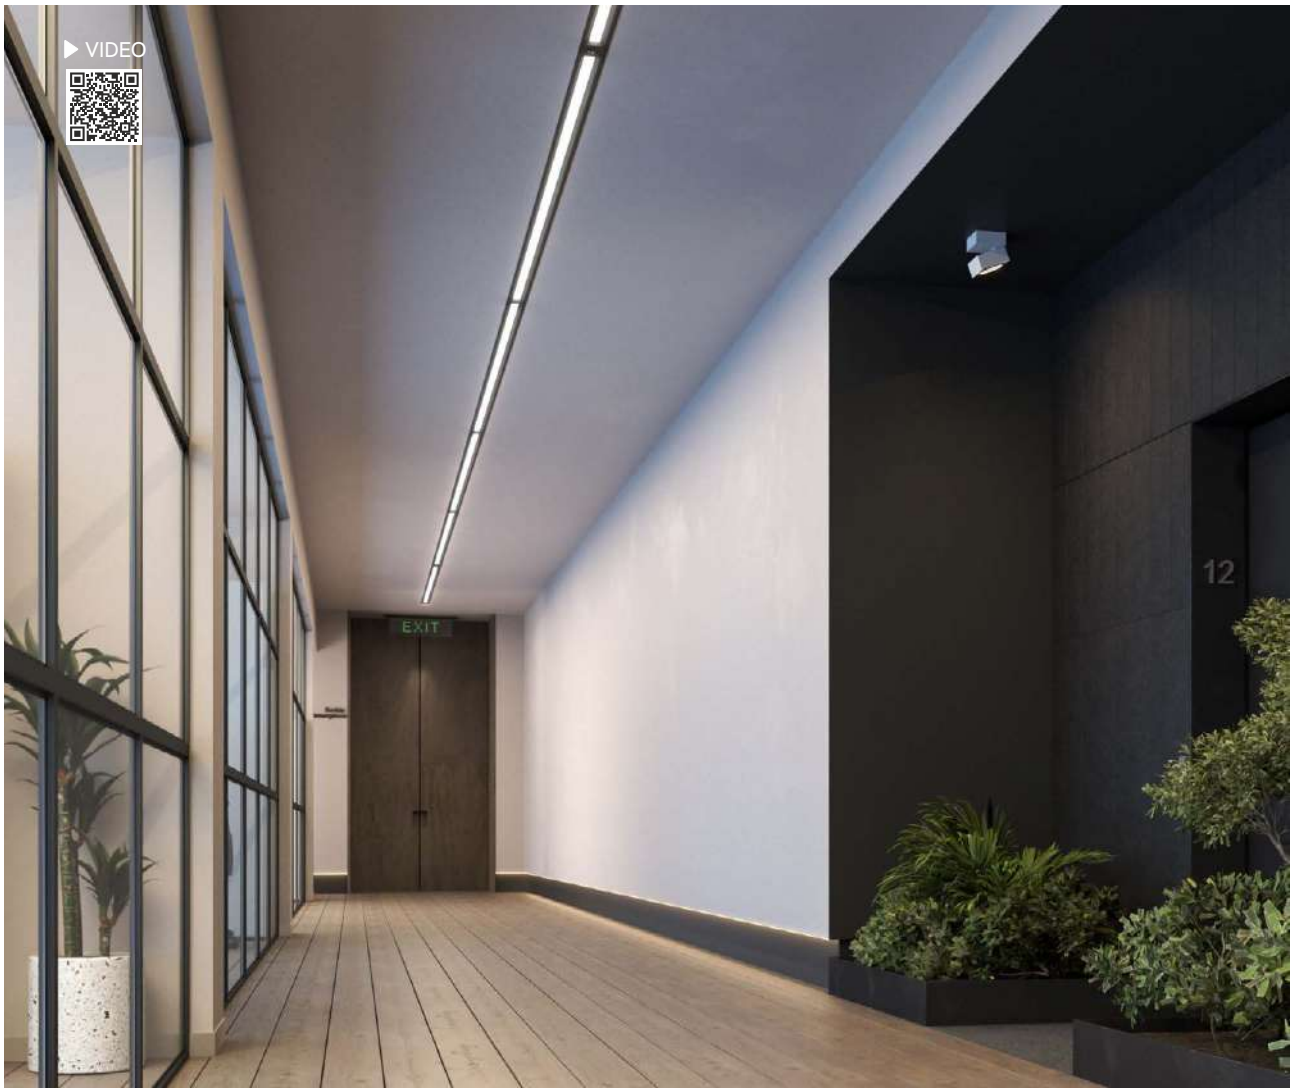

▶ VIDEO
EXIT
12



New

Urban work E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban work






*Finished luminaire.
Includes suspension kit, power cable and end caps.

Equipment

Ø60x28mm



Urban work E

Urban work

Control accessories pages 294-307.

Technical Information

Power	35W / 43W / 51W / 59W / 97,5W
Lumens	3.675 lm - 11.505 lm
Installation	Recessed / Pendant

Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)	
Work E	7	Retracted (102°)	3
Work	6		

Size	
1.130mm	3
1.410mm	4
1.690mm	5
1.970mm	6
2.530mm	7

CCT (lm/W)	
2.700K (105 lm/W)	2
3.000K (112 lm/W)	3
4.000K (118 lm/W)	4
5.000K (118 lm/W)	5
N 2.700-5.500K (105 lm/W)	9

Driver / Emergency	
On / Off	1
Dali	2
Push	3
Casambi	5
N Emerg.+ On / Off	K1
N Emerg.+ Dali	K2
N Emerg.+ Push	K3
N Emerg.+ Casambi	K5

Colour	
White (9003)	1
Black (9005)	2
ⓘ Custom RAL	C

Code: 3

Emergency 4.000K 200lm | 1/3H.

CE RoHS EAC

Accessories pages 162-163. ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



New

Urban asymmetric E






63mm x L

*Spring clips included.

Urban asymmetric





Urban asymmetric E

Urban asymmetric

Control accessories pages 294-307.

Technical Information

Power	25W / 31W / 37W / 43W / 55W
Lumens	1.650 lm - 4.290 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium
PCB	Flex (Fine 56)

Code	
Asymmetric E	3
Asymmetric	6

Diffuser (Angle)	
Opal asym. (30°/60°)	8

Size	
1.130mm	3
1.410mm	4
1.690mm	5
1.970mm	6
2.530mm	7

CCT (lm/W)	
2.700K (66 lm/W)	2
3.000K (72 lm/W)	3
4.000K (78 lm/W)	4

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
N Tuya	7

Colour	
White (9003)	1
N Black (9005)	2
ⓘ Custom RAL	C

Code: 8

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Common accessories



Joint 180°
40220



Joint 90°
40550

Urban asymmetric E accessories

End caps
40731
40732

Urban asymmetric accessories

End caps
40721
40722



Base 3x0,75 (2,5m) Ø60x28mm
40881
40882



Base 5x0,5 (2,5m) Ø60x28mm
40991
40992



Ceiling suspension
40780



Suspension Kit (2m)
40790


CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

Urban wall sensor



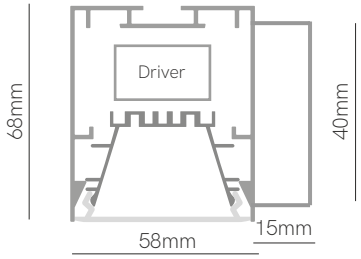

*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Wall
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	6	Opal (112°)	1	570mm	1	2.700K (112 lm/W)	2	PIR	0	White (9003)	1
				840mm	2	3.000K (128 lm/W)	3			Black (9005)	2
				1.130mm	3	4.000K (136 lm/W)	4			Gray (9006)	3
						5.000K (136 lm/W)	5			ⓘ Custom RAL	C

Code: 6 1 0


CE RoHS EAC


ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | 2m 100° | PF >0,9 | CRI ≥95

Urban track





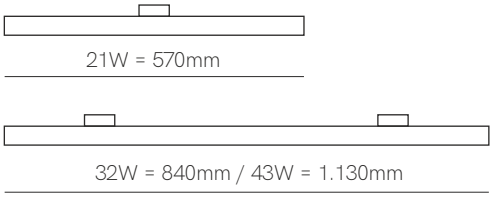

Control accessories pages 294-307.

*Finished luminaire.

Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	6	UGR (78°)	4	570mm	4	2.700K (112 lm/W)	2	On / Off	4	White (9003)	1
		Opal (112°)	5	840mm	6	3.000K (128 lm/W)	3	Casambi	6	Black (9005)	2
				1.130mm	8	4.000K (136 lm/W)	4			① Custom RAL	C
						5.000K (136 lm/W)	5				
						2.700-5.500K (105 lm/W)	9				

Code: 6

CE RoHS EAC

① Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 6 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (4) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH



Urban market





Control accessories pages 294-307.

Technical Information

Power	45W / 55,5W / 66W / 76,5W / 97,5W
Lumens	5.040 lm - 13.552 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	2	Asymmetric (15°/60°)	1	1.130mm	3	3.000K (112 lm/W)	3	On / Off	1	White (9003)	1
		Double asym.(60°/60°)	2	1.410mm	4	4.000K (118 lm/W)	4	Dali	2	Black (9005)	2
		Optical (30°)	3	1.690mm	5	MEAT R - 3.200K (86 lm/W)	R			ⓘ Custom RAL	C
		Optical (60°)	6	1.970mm	6	HAM - 3.200K (85 lm/W)	X				
		Optical (90°)	9	2.530mm	7	MEAT M - 3.500K (84 lm/W)	M				
						FISH - 6.500K (139 lm/W)	F				
						FRUIT - 4.200K (123 lm/W)	V				
						BREAD - 2.700K (131 lm/W)	P				

Code: 2

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Accessories

End caps
□ 40721
■ 40722



Joint 180°
■ 40220



Joint 90°
■ 40550



Base 3x0,75 (2,5m)
Ø60x28mm
○ 40881
● 40882



Base 5x0,5 (2,5m)
Ø60x28mm
○ 40991
● 40992



Ceiling suspension
● 40780



Suspension Kit
● 40790 (2m)

CE RoHS EMC


Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI 80/93 | 3,37m Max | DALI 2



New

Quick

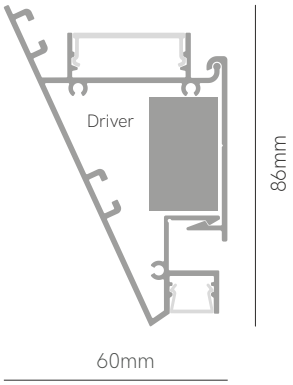

Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

Technical Information

Power	20W / 30W / 41W / 51W / 61W / 71W
Lumens	1.800 lm - 9.656 lm
Installation	Wall
Material	Aluminium
PCB	Flex / Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	4	Opal (100°)	8	570mm	1	Down-Up 2.700K (124 lm/W)	2	On / Off	1	White (9003)	1
				850mm	2	Down-Up 3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.130mm	3	Down-Up 4.000K (136 lm/W)	4	Push	3	Custom RAL	C
				1.410mm	4	Down-Up RGB (100 lm/W)	8	Casambi	5		
				1.690mm	5	Down-Up 1.800-4.000K (90 lm/W)	9	Tuya	7		
				1.970mm	6	Down 1.800-4.000K Up RGB	C				
						Down 2.700K Up RGB	D				
						Down 3.000K Up RGB	T				
						Down 4.000K Up RGB	Q				

Code: 4 8

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2


4F
6
5
4
3
2
1
0


New

Lift





Equipment

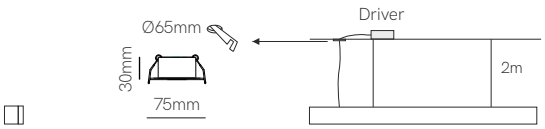

Wall

Pendant

Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

Technical Information

Power	33W / 42W / 51W / 59W - 16W / 27W / 35W	Material	Aluminium
Lumens	1.980 lm - 9.440 lm / 1.600 lm - 3.850 lm	PCB	Pendant: Rigid / Wall: Flex
Installation	Pendant / Wall		

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Pendant	6	Opal (100°)	6	1.130mm	3	2.700K (150 lm/W)	2	On / Off	1	White (9003)	1
				1.420mm	4	3.000K (155 lm/W)	3	Dali	2	Black (9005)	2
				1.700mm	5	4.000K (160 lm/W)	4	Push	3	ⓘ Custom RAL	C
				1.970mm	6	RGB-W (60 lm/W)	8	Casambi	5		
						2.700-5.500K (100 lm/W)	9	Tuya	7		

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Wall	6	Opal (100°)	0	520mm	1	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				895mm	2	3.000K (105 lm/W)	3			Black (9005)	2
				1.145mm	3	4.000K (110 lm/W)	4				

Code: 6

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2




New

Vision





Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit and power cable.

Technical Information

Power	33W / 42W / 51W / 59W
Lumens	1.980 lm - 9.440 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	
Code	V

Diffuser (Angle)	
Opal (90°)	4
Prismatic (70°)	6
Low glare black	9

Size	
1.130mm	3
1.410mm	4
1.690mm	5
1.970mm	6

CCT (lm/W)	
2.700K (150 lm/W)	2
3.000K (155 lm/W)	3
4.000K (160 lm/W)	4
RGB-W (60 lm/W)	8
2.700-5.500K (100 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	C

Code: V

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (9) | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



Time E






43mm x L

*Spring clips included.

Time





Time E Time

Control accessories pages 294-307.

Technical Information

Power	31W / 46W / 69W	Material	Aluminium
Lumens	3.472 lm - 9.384 lm	PCB	Rigid
Installation	Recessed and Surface / Pendant		

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Time E	9	UGR (81°)	3	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
Time	8	Opal (112°)	5	1.690mm	5	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				2.530mm	7	4.000K (136 lm/W)	4	Push	3	Gray (9006)	3
						5.000K (136 lm/W)	5	Casambi	5	Custom RAL	C

Code:

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Common accessories



Joint 180° 40770
Joint 90° 40990

Time E accessories

End caps
40751
40752
40753

Time accessories

End caps
40741
40742
40743



Wall bracket
40851
40852
40853



Trimless
40339



Base 3x0,75 (2,5m) Ø60x28mm
40881
40882
40883



Base 5x0,5 (2,5m) Ø60x28mm
40991
40992
40993



Ceiling suspension
40780



Suspension Kit (2m)
40790

CE RoHS EMC


Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2




Nexus





Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	46W / 70W
Lumens	4.830 lm - 7.350 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	4	UGR (81°)	4	1.130mm	3	2.700-5.500K (105 lm/W)	9	Casambi	5	White (9003)	1
				1.690mm	5			Tuya	7	Black (9005)	2
								RF Control	9	Gray (9006)	3
										ⓘ Custom RAL	C

Code: 4 4 9

CE RoHS EAC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RF included on Driver RF Control.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | RF



Dual






Opal/UGR

Dual inserted track




Spot not included



Track/UGR

Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Dual

Dual inserted track

Technical Information

Power	18-24W / 28-35W / 46-52W
Lumens	Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	5	Opal/UGR (81°)	6	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
		Track/UGR (81°)	9	1.690mm	5	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				2.530mm	7	4.000K (136 lm/W)	4	Push	3	Custom RAL	C
						5.000K (136 lm/W)	5	Casambi	5		

Code: 5

CE RoHS

Consult delivery terms and conditions.


*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2




Forest





Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit and power cable.

Technical Information

Power	31W / 38W / 46W / 53W
Lumens	3.255 lm - 7.208 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	
Code	4

Diffuser (Angle)	
UGR (81°)	3
Opal (112°)	5

Size	
1.155mm	3
1.435mm	4
1.715mm	5
1.995mm	6

CCT (lm/W)	
2.700K (112 lm/W)	2
3.000K (128 lm/W)	3
4.000K (136 lm/W)	4
5.000K (136 lm/W)	5
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
Wood	8

Code: 4 _ _ _ _ _ 8

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



Time wall sensor





*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Wall
Material	Aluminium
PCB	Rigid


Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	8	Opal (112°)	1	570mm	1	2.700K (112 lm/W)	2	PIR	0	White (9003)	1
				840mm	2	3.000K (128 lm/W)	3			Black (9005)	2
				1.130mm	3	4.000K (136 lm/W)	4			Gray (9006)	3
						5.000K (136 lm/W)	5			ⓘ Custom RAL	C

Code: 8 1 0

CE RoHS EAC


ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 2m 100° | 230 VAC | PF >0,9 | CRI ≥95

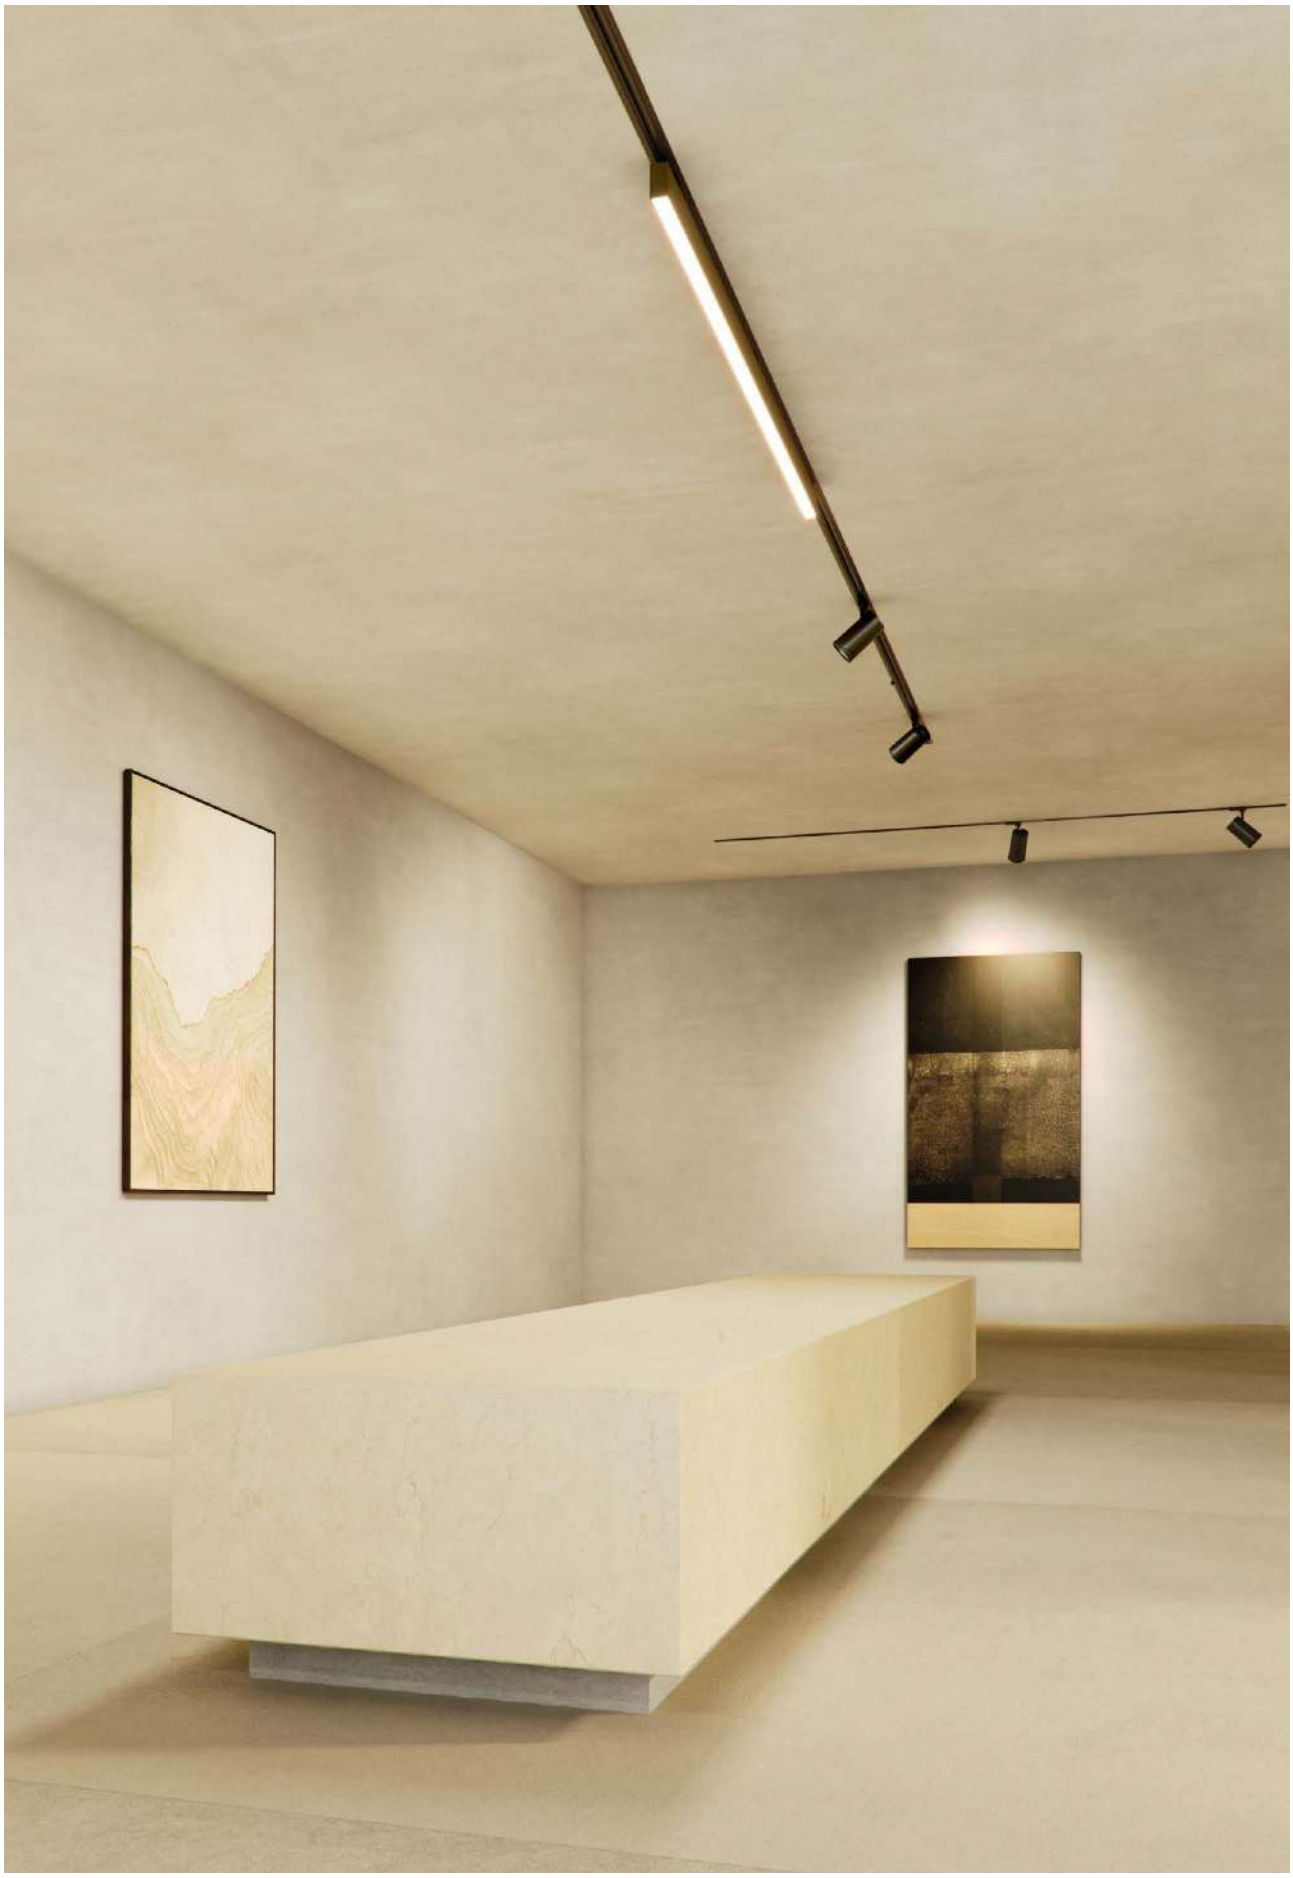

Time track






Equipment



15W = 570mm



23W = 840mm / 31W = 1.130mm

Control accessories pages 294-307.

*Finished luminaire.

Technical Information

Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	8	UGR (81°)	3	570mm	4	2.700K (112 lm/W)	2	On / Off	4	White (9003)	1
		Opal (112°)	5	840mm	6	3.000K (128 lm/W)	3	Casambi	6	Black (9005)	2
				1.130mm	8	4.000K (136 lm/W)	4			① Custom RAL	C
						5.000K (136 lm/W)	5				

Code: 8

CE RoHS EAC

① Consult delivery terms and conditions.


*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95



Dental Clinic Eva Flores, El Prat de LLobregat (Spain). Design: Meumstudio.

Kubo E







*Finished luminaire. Includes driver, spring clips, power cable and end caps.


Kubo





*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.





Kubo E Kubo

Control accessories pages 294-307.

Technical Information

Power	31W / 38W / 46W / 54W
Lumens	3.100 lm - 6.264 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	
Kubo E	5
Kubo	7

Diffuser (Angle)	
Opal (100°)	5

Size	
1.130mm	3
1.410mm	4
1.690mm	5
1.970mm	6

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
5.000K (116 lm/W)	5
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	C

Code: 5

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | Max Kubo 3,37m Kubo E 2m | tuya | PUSH | DALI


VIDEO


Mirrow







Equipment

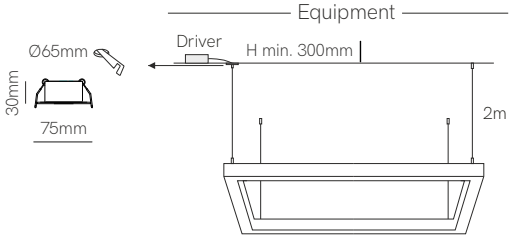

Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Technical Information

Power	85W / 94W
Lumens	8.500 lm - 10.434 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	7	Opal (100°)	8	595x595mm	2	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.195x595mm	9	3.000K (105 lm/W)	3	Dali	2	Black (9005)	2
						4.000K (111 lm/W)	4	Push	3	Custom RAL	C
						RGB-W (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		

Code: 7 8

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2




▶ VIDEO


Tax







600x600x600mm / 840x840x840mm

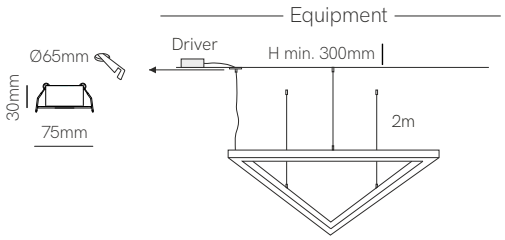

Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Technical Information

Power	52W / 64W
Lumens	5.200 lm - 7.104 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	7	Opal (100°)	2	600mm	4	2.700K (100 lm/W)	2	On / Off	1	△ White (9003)	1
				840mm	8	3.000K (105 lm/W)	3	Dali	2	▲ Black (9005)	2
						4.000K (111 lm/W)	4	Push	3	ⓘ Custom RAL	C
						RGB-W (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		


Code: 7 2

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2

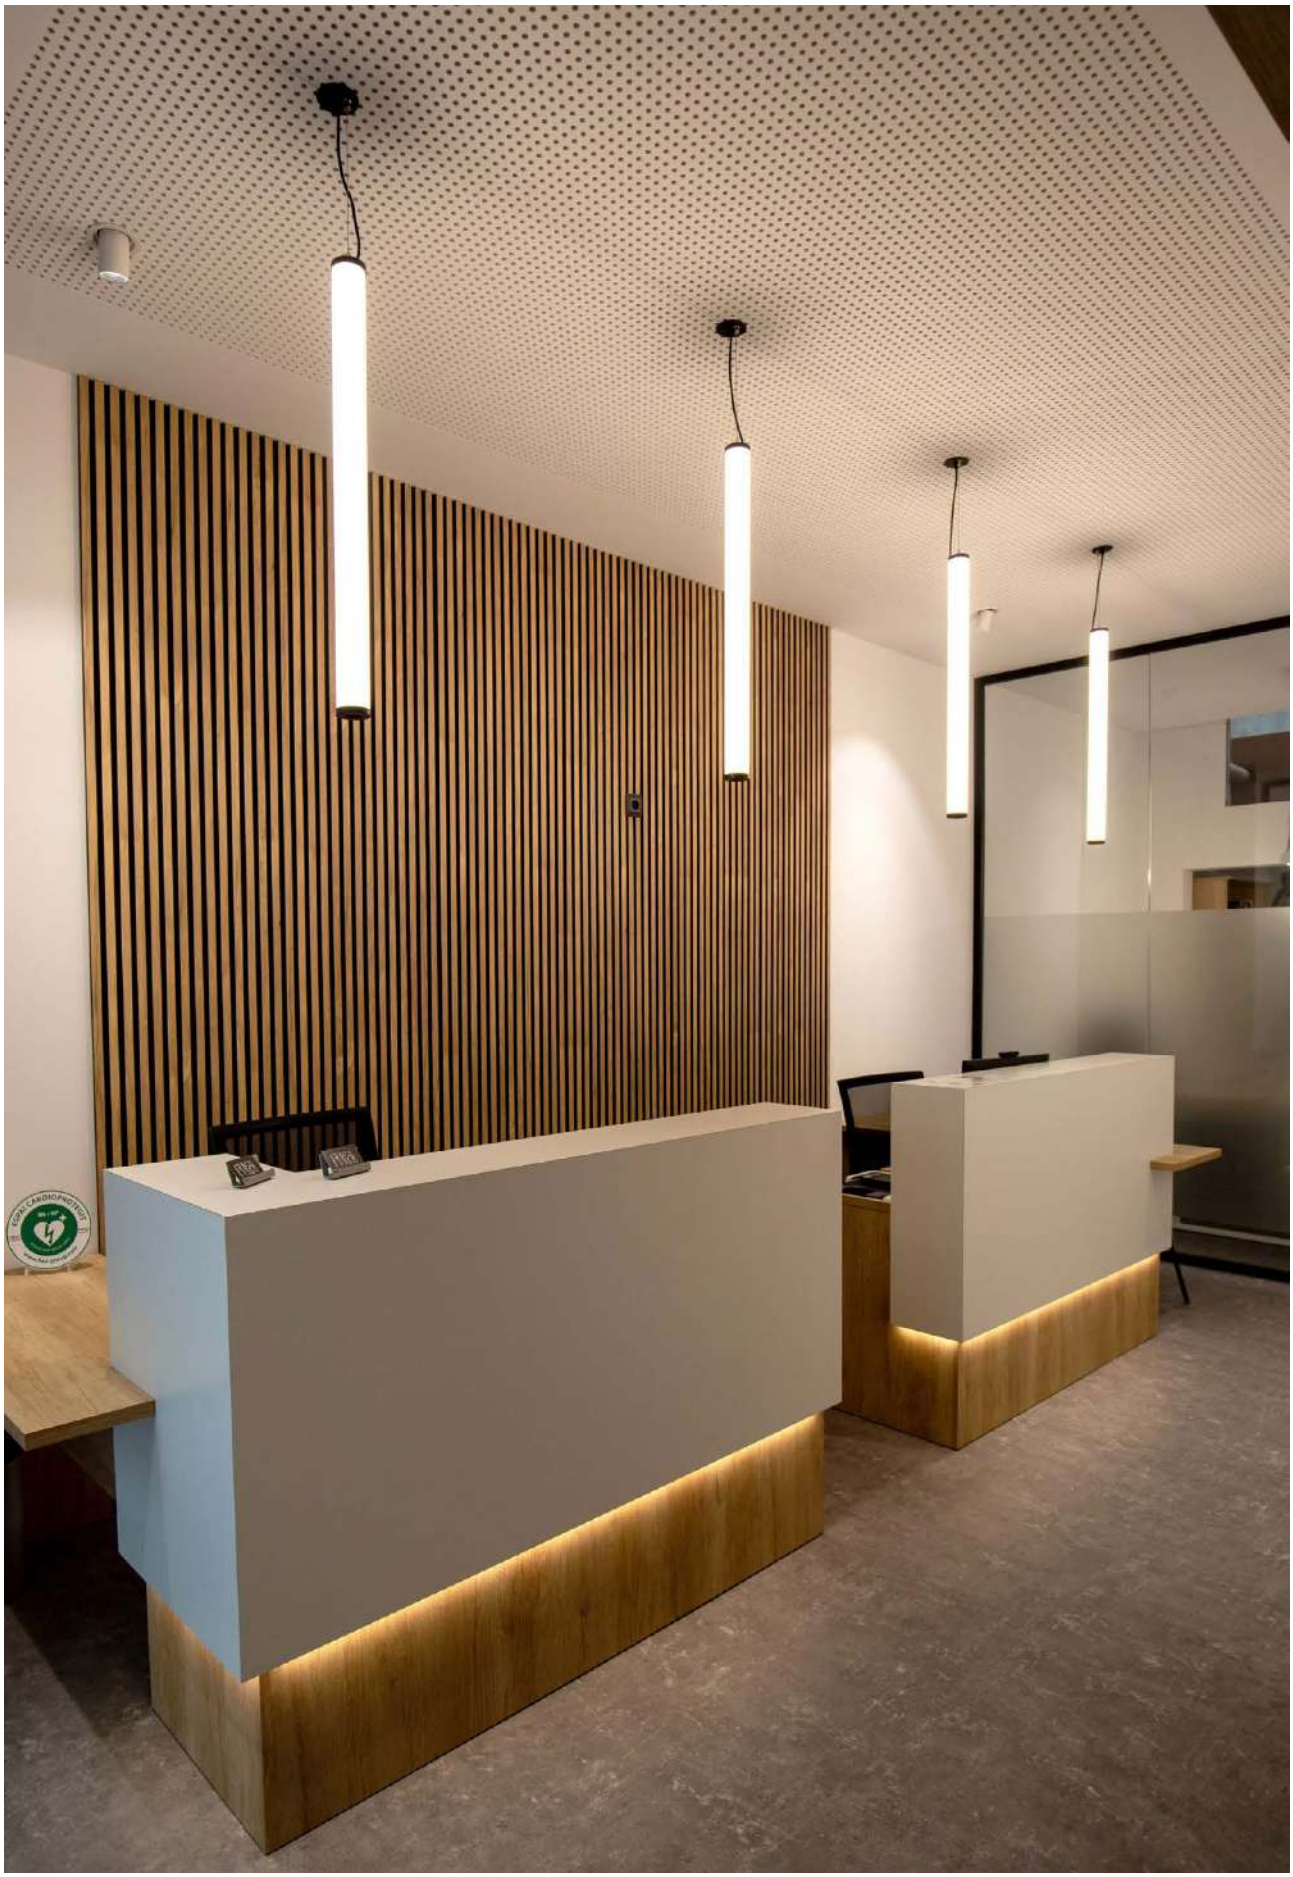

Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié l'iluminació. Architecture: Pablo Amorós.


Filter






Equipment

Code **30** recessed driver



Code **37** surface driver



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	32W - 120W
Lumens	3.200 lm - 13.320 lm
Installation	Pendant
Material	Aluminium
Material	Flex (Fine 48 / Fine 54)

Code / Diffuser (Angle)	
N Recessed Opal (360°)	**30**
Surface Opal (360°)	**37**

Size	
800mm	**3**
1.200mm	**5**
1.600mm	**7**
2.000mm	**9**

CCT (lm/W)	
2.700K (100 lm/W)	**2**
3.000K (105 lm/W)	**3**
4.000K (111 lm/W)	**4**
RGB (58 lm/W)	**7**

Driver	
On / Off	**1**
Dali	**2**
Push	**3**
Casambi	**5**
Tuya	**7**

Colour	
White (9003)	**1**
Black (9005)	**2**
Custom RAL	**C**

Code: 7

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2




Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié l'il·luminació. Architecture: Pablo Amorós.

Tubi





Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps (aluminium).

Technical Information

Power	35W / 44W / 53W / 62W
Lumens	3.500 lm - 8.432 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	7	Opal (270°)	1	1.130mm	3	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	Push	3	Custom RAL	C
				1.970mm	6	5.000K (136 lm/W)	5	Casambi	5		
						RGB-W (100 lm/W)	8	Tuya	7		
						2.700-5.500K (105 lm/W)	9				

Code: 7 1

CE RoHS

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI 2



Tubi wall



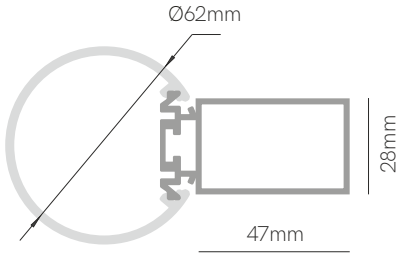

Control accessories pages 294-307.

*Finished luminaire. Includes base wall and end caps (aluminium).

Technical Information

Power	35W / 44W / 53W
Lumens	3.500 lm - 5.883 lm
Installation	Wall
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	7	Opal (270°)	9	1.130mm	3	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm	4	3.000K (105 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (111 lm/W)	4	Push	3	① Custom RAL	C
						RGB-W (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		

Code: 7 9

① Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | PUSH | DALI 2



M-AUDIO

Grip



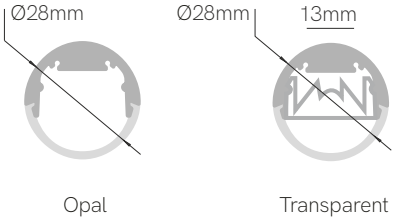

Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	26W / 33W / 39W / 46W
Lumens	2.522 lm - 4.968 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 52)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	2	Opal (100°)	4	1.130mm	3	2.700K (97 lm/W)	2	On / Off	1	Black (9005)	2
		Transparent (30°)	8	1.410mm	4	3.000K (103 lm/W)	3	Dali	2	Custom RAL	C
				1.690mm	5	4.000K (108 lm/W)	4	Push	3		
				1.970mm	6	RGB (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		


Code: 2

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2

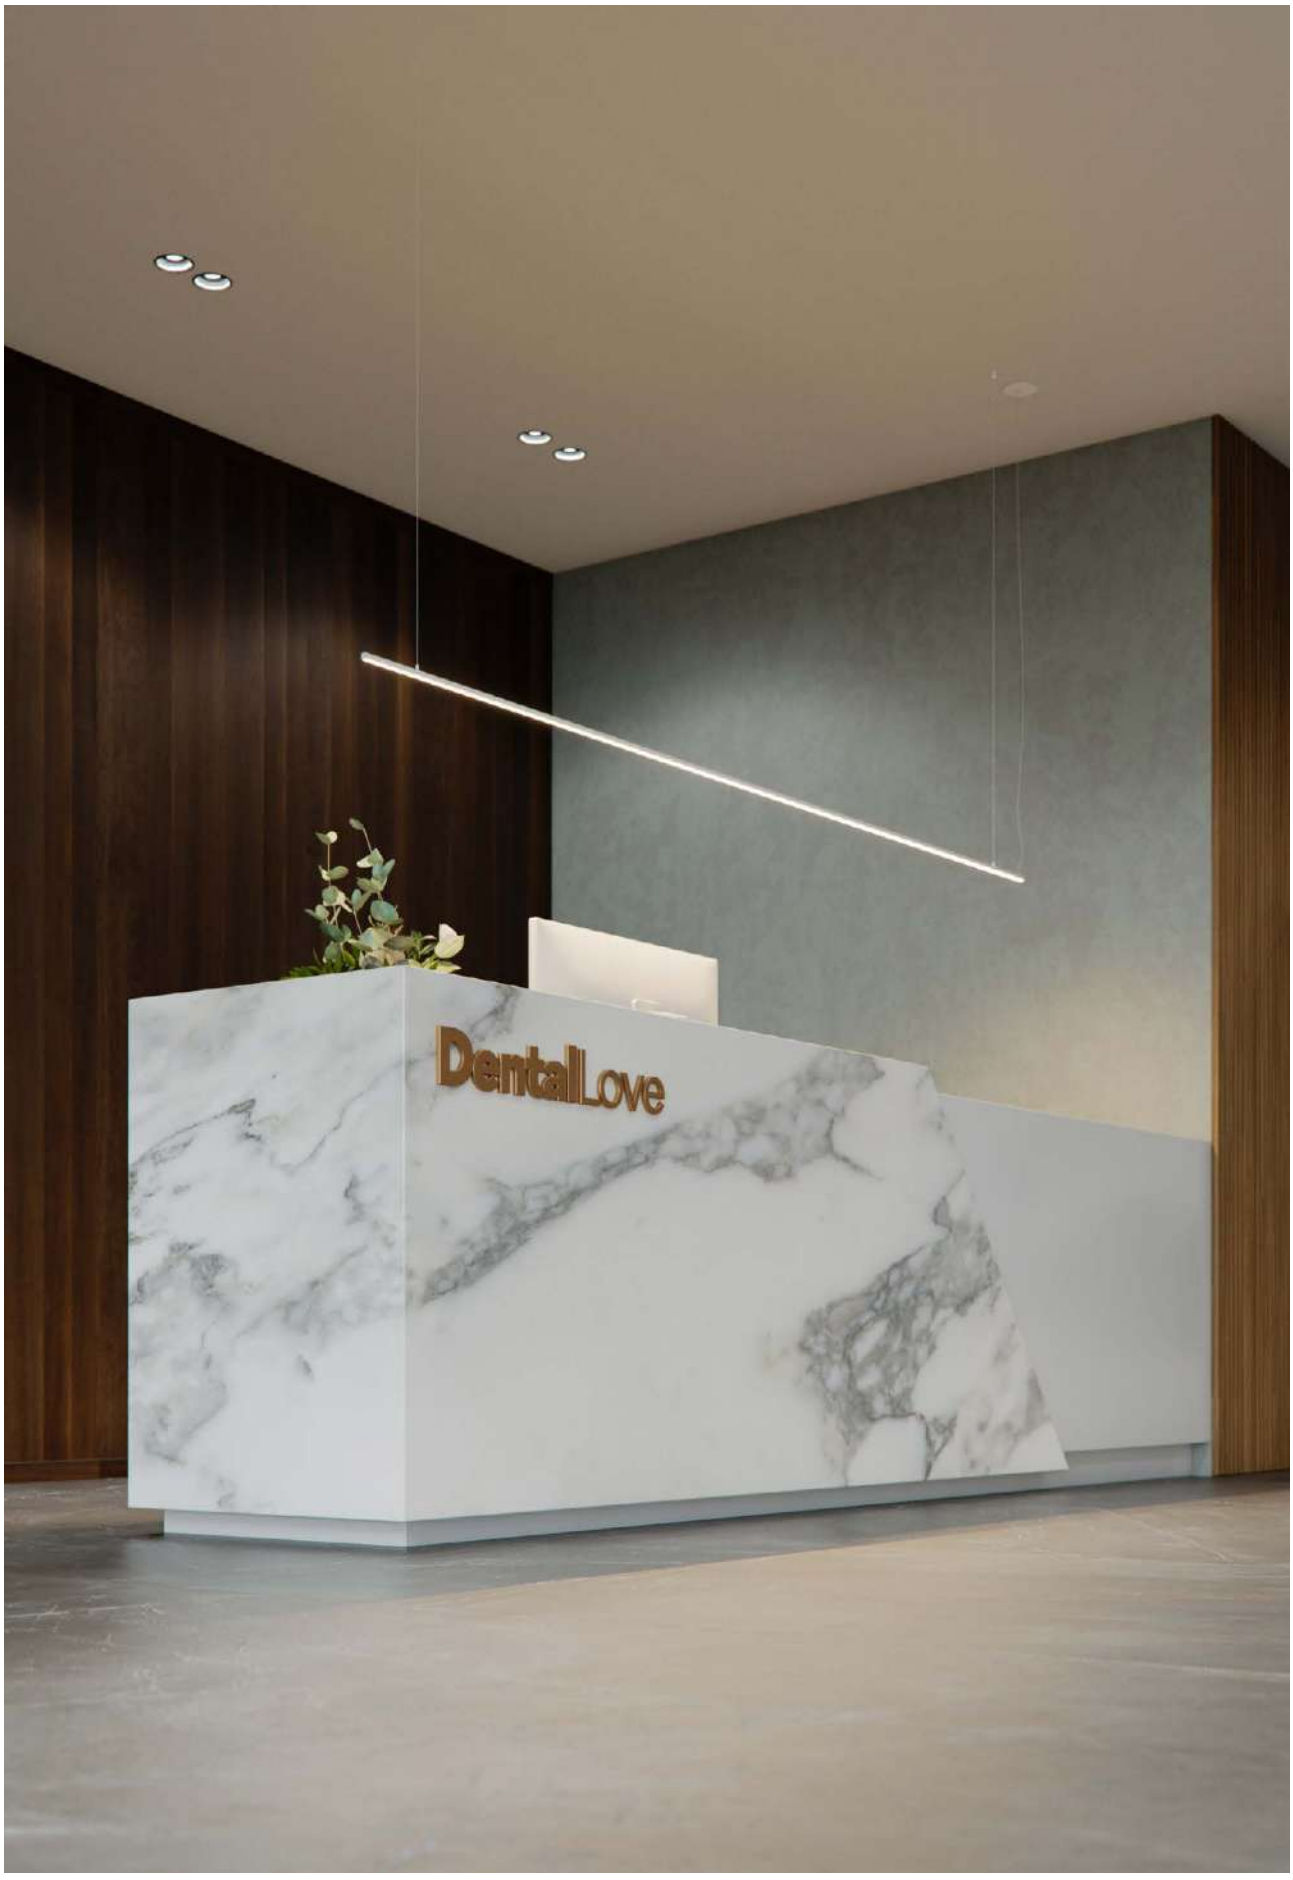

DentalLove

Nyneto





Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Technical Information

Power	16W / 20W / 24W / 28W
Lumens	896 lm - 1.848 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 88)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	8	Opal (100°)	8	1.120mm	3	2.700K (56 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm	4	3.000K (61 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (66 lm/W)	4	Push	3	Custom RAL	C
				1.970mm	6			Casambi	5		
								Tuya	7		

Code: 8 8

CE RoHS


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2




Minimus





Equipment

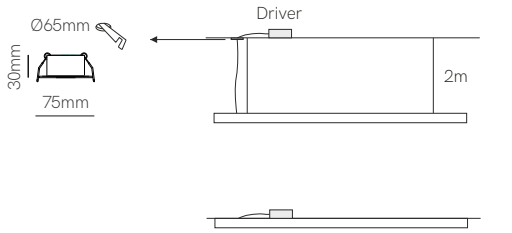

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2.425 lm - 4.644 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Flex (Fine 52)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	5	Opal prism (100°)	8	1.170mm	2	2.700K (97 lm/W)	2	On / Off	1	White (9003)	1
				1.420mm	4	3.000K (103 lm/W)	3	Dali	2	Black (9005)	2
				1.720mm	6	4.000K (108 lm/W)	4	Push	3	Custom RAL	C
				1.970mm	8			Casambi	5		
								Tuya	7		

Code: 5 8

CE RoHS


Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2




▶ VIDEO

Dau E







*Finished luminaire. Includes power supply, spring clips, power cable and end caps.


Dau





*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.





Dau E Dau

Control accessories pages 294-307.

Technical Information

Power	18W / 23W / 26W / 30W
Lumens	1.800 lm - 3.420 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium
PCB	Flex (Fine 61)

Code / Diffuser (Angle)		
Dau E	Opal (110°)	16
Dau	Opal (110°)	15

Size	
1.170mm	3
1.420mm	4
1.720mm	5
1.970mm	6

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
5.000K (114 lm/W)	5
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	C

Code:

CE RoHS

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI




Square








530 x 530mm



530 x 1.030mm

Equipment



Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	43W / 62W
Lumens	4.300 lm - 6.882 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 61)

Code		Diffuser (Angle)	
Code	3	Opal (110°)	3

Size	
530 x 530mm	4
530 x 1.030mm	8

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	C


Code: 3 3

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2

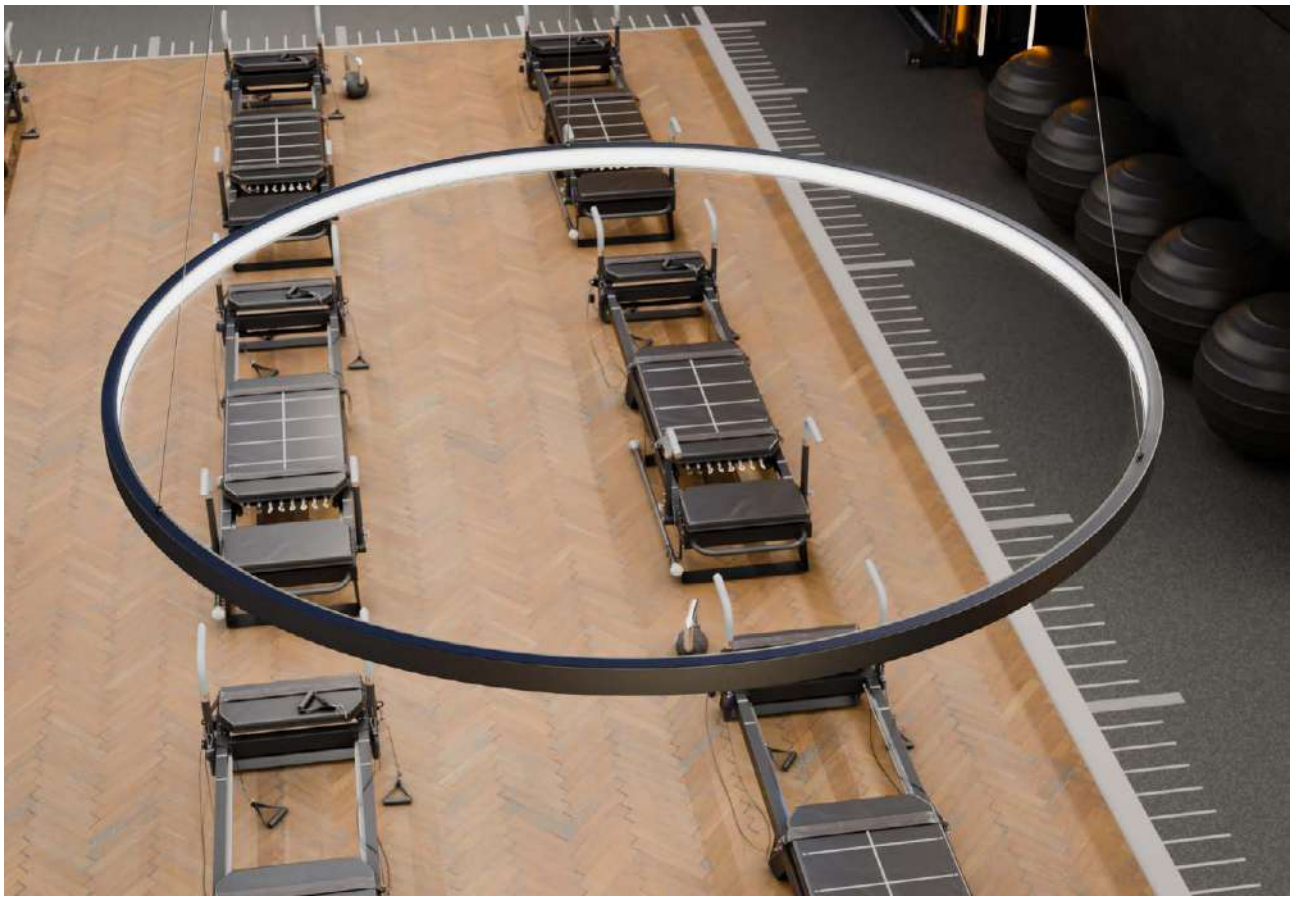





New

Zero in XL






Ø400/700/1.000mm
Tolerance ±10%



Equipment

Ø250/280x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	37W / 65W / 94W
Lumens	2.220 lm - 15.040 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	9	Opal (100°)	1	400mm	1	2.700K (150 lm/W)	2	On / Off	1	White (9003)	1
				700mm	2	3.000K (155 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm	9	4.000K (160 lm/W)	4	Push	3	Matt Gold	4
						RGB-W (60 lm/W)	7	Casambi	5	Silver	5
						2.700-5.500K (100 lm/W)	9	Tuya	7	Custom RAL	C


Code: 9 1

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2

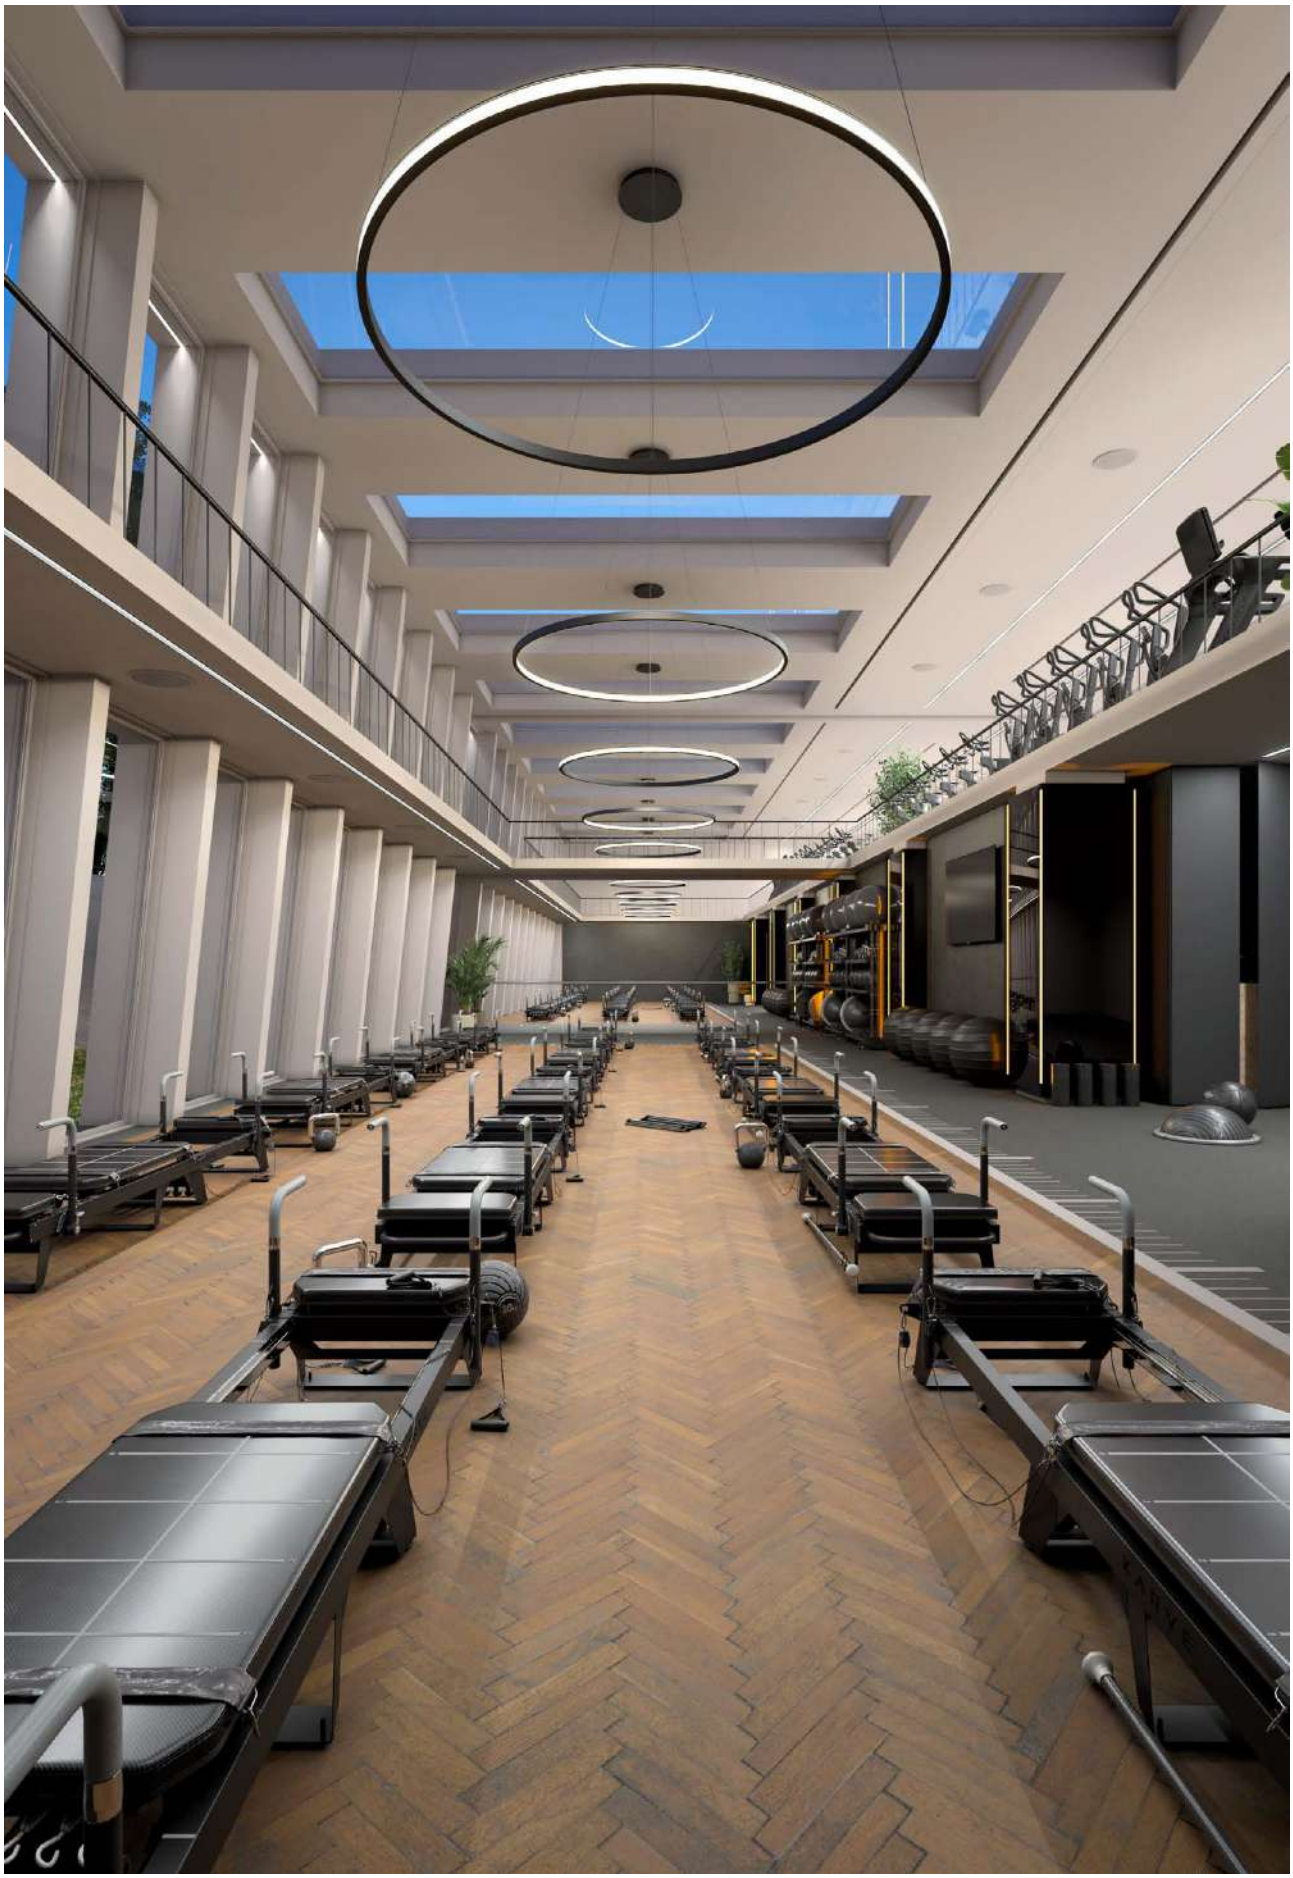


New

Zero out XL






Ø400/700/1.000mm
Tolerance ±10%



Equipment

Ø250/280x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	37W / 65W / 94W
Lumens	2.220 lm - 15.040 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	9	Opal (100°)	2	400mm	1	2.700K (150 lm/W)	2	On / Off	1	White (9003)	1
				700mm	2	3.000K (155 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm	9	4.000K (160 lm/W)	4	Push	3	Matt Gold	4
						RGB-W (60 lm/W)	7	Casambi	5	Silver	5
						2.700-5.500K (100 lm/W)	9	Tuya	7	Custom RAL	C

Code: 9 2

CE RoHS EAC


ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2




Zero in

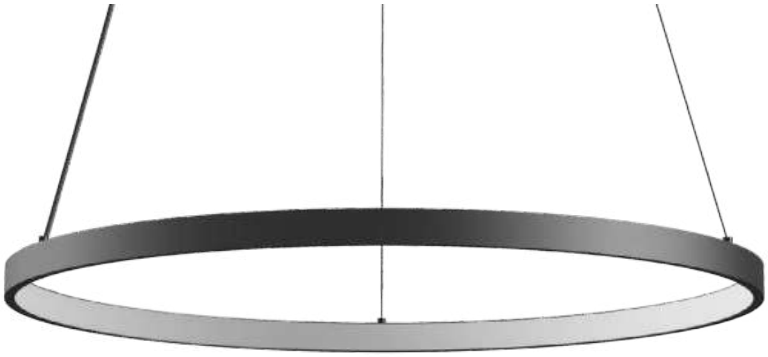




Ø400/700/1.000/1.400mm

Tolerance ±10%



Equipment

Ø250/280/330x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 56)

Code		Diffuser (Angle)	
Code	1	Opal (100°)	2

Size	
400mm	2
700mm	4
1.000mm	6
ⓘ 1.400mm	8

CCT (lm/W)	
2.700K (60 lm/W)	2
3.000K (66 lm/W)	3
4.000K (72 lm/W)	4
RGB-W (50 lm/W)	8
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
ⓘ Matt Gold	4
ⓘ Silver	5
ⓘ Custom RAL	C

Code: 1 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2




Zero out






Ø400/700/1.000/1.400mm
Tolerance ±10%



Equipment

Ø250/280/330x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 56)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	4	400mm	2	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
				700mm	4	3.000K (66 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm	6	4.000K (72 lm/W)	4	Push	3	ⓘ Matt Gold	4
				ⓘ 1.400mm	8	RGB-W (50 lm/W)	8	Casambi	5	ⓘ Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	ⓘ Custom RAL	C

Code: 1 4

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New


Circus in XL




New


Circus out XL







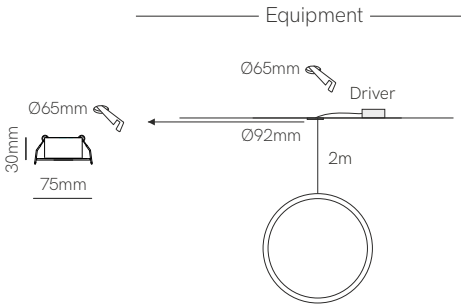



Circus in XL

Circus out XL

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	37W / 65W / 94W
Lumens	2.220 lm - 15.040 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 30)

Code	
Code	9

Diffuser (Angle)	
IN Opal (100°)	0
OUT Opal (100°)	8

Size	
400mm	2
700mm	4
1.000mm	6

CCT (lm/W)	
2.700K (150 lm/W)	2
3.000K (155 lm/W)	3
4.000K (160 lm/W)	4
RGB-W (60 lm/W)	7
2.700-5.500K (100 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	C

Code: 9

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2




New

Circus in



Circus out



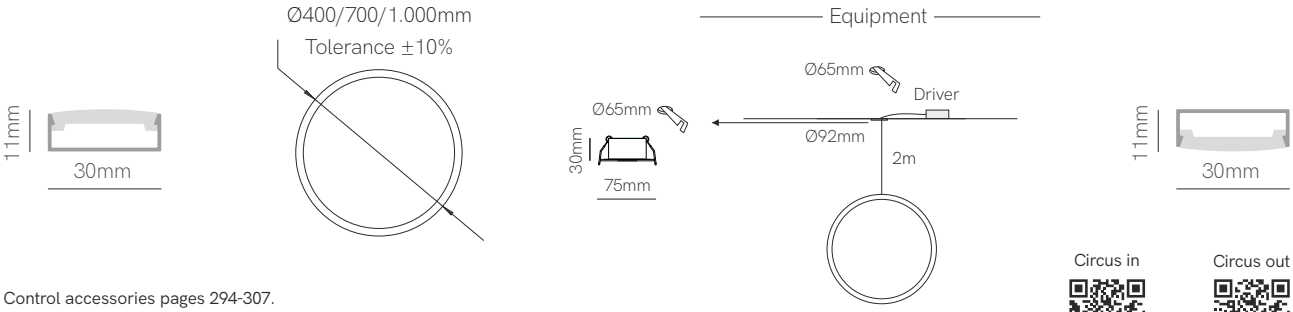

Circus in

Circus out

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	26W / 44W / 63W
Lumens	1.300 lm - 4.536 lm
Installation	Pendant
Material	Aluminium
Material	Flex (Fine 56)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	1	IN Opal (100°)	0	400mm	2	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
		N OUT Opal (100°)	1	700mm	4	3.000K (66 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm	6	4.000K (72 lm/W)	4	Push	3	Matt Gold	4
						RGB-W (50 lm/W)	8	Casambi	5	Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	Custom RAL	C

Code: 1

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2





Tundra



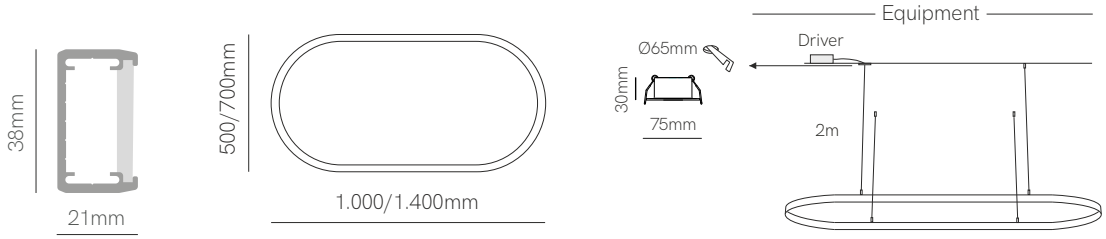

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	77W / 112W
Lumens	3.850 lm - 8.064 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size	
Code	8	Opal (100°)	6	500 x 1.000mm	4
				700 x 1.400mm	6

CCT (lm/W)	
2.700K (60 lm/W)	2
3.000K (66 lm/W)	3
4.000K (72 lm/W)	4
RGB-W (50 lm/W)	8
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	C

Code: 8 6

CE RoHS EAC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



Zero direct XL



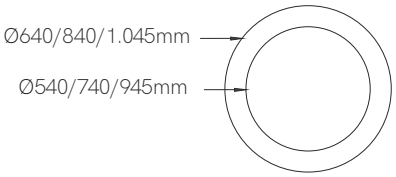

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	78W / 105W / 131W
Lumens	5.382 lm - 10.349 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	3	640mm	2	2.700K (69 lm/W)	2	On / Off	1	White (9003)	1
				840mm	5	3.000K (75 lm/W)	3	Dali	2	Black (9005)	2
				1.045mm	6	4.000K (79 lm/W)	4	Push	3	Gray (9006)	3
								Casambi	5		

Code: 1 3

CE RoHS EAC

*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



Connecta Fisioteràpia i Salut, Barcelona (Spain).


Zero direct






Ø520/800/1.200/1.500/3.000mm

Tolerance ±10%




Equipment

Ø250/280x41mm



Ø520/800/1.200/1.500mm

Ø80x29mm



Ø3.000mm

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	35W / 55W /75W / 94W / 189W
Lumens	2.310 lm - 14.742 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Flex (Fine 56)

Code		Diffuser (Angle)	
Code	1	Opal (100°)	7

Size	
520mm	0
800mm	2
1.200mm	6
1.500mm	8
3.000mm	9
Custom	C

CCT (lm/W)	
2.700K (66 lm/W)	2
3.000K (72 lm/W)	3
4.000K (78 lm/W)	4
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	C

Code: 1 7

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

Zero design

Zero 45°

Code		Diffuser (Angle)		Size		CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	800mm	1	2.700K (66 lm/w) - 22W/m	2	24VDC	0	White (9003)	1
				1.500mm	4	3.000K (72 lm/w) - 22W/m	3			Black (9005)	2
				3.000mm	7	4.000K (78 lm/w) - 22W/m	4			ⓘ Matt Gold	4
						CCT (70 lm/w) - 22W/m	9			ⓘ Silver	5
										ⓘ Custom RAL	C

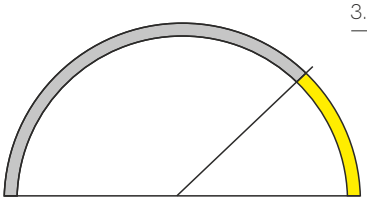


800 - 1.500 - 3.000mm
Tolerance ±10%

Code: Z 1 0

Zero 90°

Code		Diffuser (Angle)		Size		CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	800mm	2	2.700K (66 lm/w) - 22W/m	2	24VDC	0	White (9003)	1
				1.500mm	5	3.000K (72 lm/w) - 22W/m	3			Black (9005)	2
						4.000K (78 lm/w) - 22W/m	4			ⓘ Matt Gold	4
						CCT (70 lm/w) - 22W/m	9			ⓘ Silver	5
										ⓘ Custom RAL	C

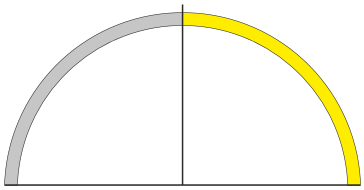


800 - 1.500mm
Tolerance ±10%

Code: Z 1 0

Zero 90°

Code		Diffuser (Angle)		Size		CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	Extern (1.500mm)	3	2.700K (66 lm/w) - 22W/m	2	24VDC	0	White (9003)	1
				Intern (1.500mm)	6	3.000K (72 lm/w) - 22W/m	3			Black (9005)	2
						4.000K (78 lm/w) - 22W/m	4			ⓘ Matt Gold	4
						CCT (70 lm/w) - 22W/m	9			ⓘ Silver	5
										ⓘ Custom RAL	C

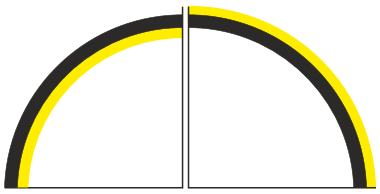

1.500mm
Tolerance ±10%

Code: Z 1 0

CE RoHS EMC

Control accessories pages 294-307.


ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC

Zero 180°

Code		Diffuser (Angle)		Size		CCT (lm/W) - Power/m		Voltage		Colour	
Code	**Z**	Opal (100°)	**1**	800mm	**8**	2.700K (66 lm/w) - 22W/m	**2**	24VDC	**0**	White (9003)	**1**
				1.500mm	**9**	3.000K (72 lm/w) - 22W/m	**3**			Black (9005)	**2**
						4.000K (78 lm/w) - 22W/m	**4**			ⓘ Matt Gold	**4**
						CCT (70 lm/w) - 22W/m	**9**			ⓘ Silver	**5**
										ⓘ Custom RAL	**C**

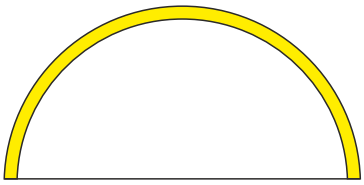

800 - 1.500mm
Tolerance ±10%

Code: **Z** **1** _ _ **0** _


Zero line

Code		Diffuser (Angle)		Size		CCT (lm/W) - Power/m		Voltage		Colour	
Code	**Z**	Opal (100°)	**1**	2.500mm	**0**	2.700K (66 lm/w) - 22W/m	**2**	24VDC	**0**	White (9003)	**1**
						3.000K (72 lm/w) - 22W/m	**3**			Black (9005)	**2**
						4.000K (78 lm/w) - 22W/m	**4**			ⓘ Matt Gold	**4**
						CCT (70 lm/w) - 22W/m	**9**			ⓘ Silver	**5**
										ⓘ Custom RAL	**C**



2.500mm

Code: **Z** **1** _ _ **0** _



ⓘ On demand.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver Casambi and Tuya.. Accessories on page 162-163.

Accessories



End Cap
- 40631
- 40632
- 40634
- 40635



Suspension Kit Metallic (2m)
- 34720
- 34721
- 34722



Ceiling suspension
- 40430



Kit Joint Metallic
- 40490
- 40491
- 40492

Control accessories pages 294-307.

ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC









Zero dual






Ø1.050/1.550/3.030mm
Tolerance ±10%




Equipment

Ø250/280x41mm



Ø1.050/1.535mm

Ø60x29mm



Ø3.035mm

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

Technical Information

Power	107W / 162W / 325W
Lumens	5.457 lm - 17.225 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	8	1.050mm	3	3.000K (55 lm/W)	3	On / Off	1	○ White (9003)	1
				1.550mm	8	4.000K (58 lm/W)	4	Dali	2	● Black (9005)	2
				3.050mm	9			Push	3		
								Casambi	5		
								Tuya	7		

Code: 1 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

Kaa







Kaa line








Kaa



Equipment

Ø330mm x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Technical Information

Power	90W / 180W / 300W
Lumens	3.690 lm - 21.900 lm
Installation	Pendant
Material	Aluminium and silicone

Code	
Code	**76**

Size (Led)	
3 x 1.500mm	**1**
3 x 3.000mm	**3**
3 x 5.000mm	**5**

CCT (lm/W)	
2.400K (60 lm/W)	**2**
2.700K (65 lm/W)	**3**
3.000K (69 lm/W)	**4**
4.000K (73 lm/W)	**5**
RGB (41 lm/W)	**8**
2.700-4.200K (55 lm/W)	**9**

Driver	
On / Off	**1**
Dali	**2**
Push	**3**
Casambi	**5**
Tuya	**7**

Colour	
White (9003)	**1**
Black (9005)	**2**
Custom RAL	**C**

Code: **76**

Included accessories

Suspension kit 2m



1 x 3
3 x 6
5 x 9

+ Clip



1 x 3
3 x 6
5 x 9

CE RoHS EAC


Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI



Kaa line

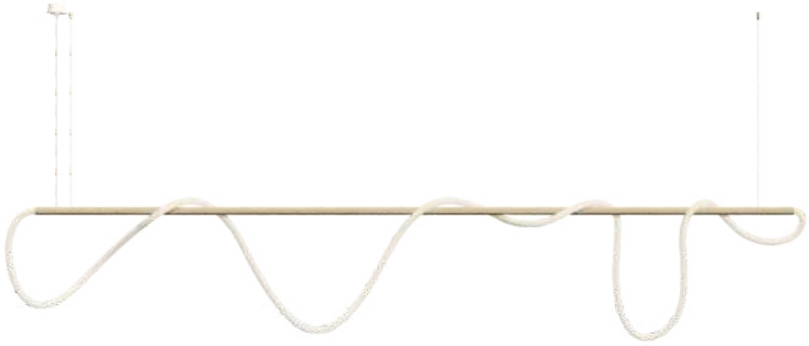

Equipment

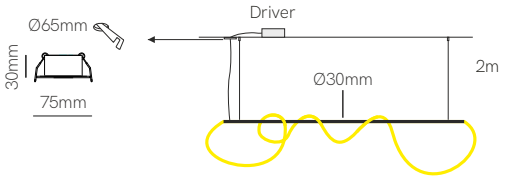

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power.

Technical Information

Power	30W / 60W / 100W
Lumens	1.230 lm - 7.300 lm
Installation	Pendant
Material	Aluminium and silicone

Code	
Code	74

Size (Stick + Led)	
1.000 + 1.500mm	1
1.600 + 3.000mm	3
2.500 + 5.000mm	5

CCT (lm/W)	
2.400K (60 lm/W)	2
2.700K (65 lm/W)	3
3.000K (69 lm/W)	4
4.000K (73 lm/W)	5
RGB (41 lm/W)	8
2.700-4.200K (55 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour (stick)	
White (9003)	1
Black (9005)	2
Matt Gold	3
Custom RAL	C

Code: 74

CE RoHS EAC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI





Horizon



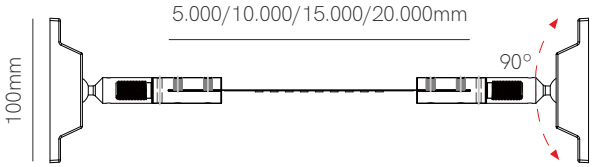


Equipment

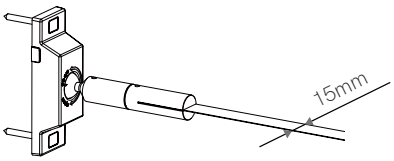



Compatible profiles.



Technical Information

Max. power	48W - 288W
Lumens	4.560 lm - 28.800 lm
Installation	Pendant
Material	Aluminium
Material	Flex

Code	
Code	2

Led	
9,6W/m (Fine 51)	5
14,4W/m (Fine 41)	7

Size (Led)	
5.000mm	1
10.000mm	2
15.000mm	3
20.000mm	4

CCT (lm/W) - Power/m	
2.700K (95 lm/W)	2
3.000K (98 lm/W)	3
4.000K (100 lm/W)	4

Driver	
On / Off	1

Colour	
☐ White (9003)	1
■ Black (9005)	2

Code: 2 1

Accessories



2 holder
☐ HRZ-01
■ HRZ-02



1m steel band
☐ HRZ-PLE-01
■ HRZ-02

CE RoHS


*Led strip and power supply included.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | PF >0,9 | CRI ≥90 | 20m Max



Flash





*Finished luminaire. Includes spring clips and end caps.

Technical Information

Power	16W / 27W / 35W / 46W / 55W
Lumens	1.600 lm - 6.050 lm
Installation	Wall
Material	Aluminium
PCB	Flex (Fine 32)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	3	Opal (90°)	9	520mm	1	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				895mm	2	3.000K (105 lm/W)	3			Black (9005)	2
				1.145mm	3	4.000K (110 lm/W)	4			Aluminium	9
				1.520mm	5	6.000K (110 lm/W)	6			Custom RAL	C
				1.825mm	6						

Code: 3 9 1

CE RoHS EMC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

3 YEARS WARRANTY | 35.000 HOURS | 230 VAC | IP 20 | CRI ≥80 | 2m Max | TRIAC DIMM


96

Triton





Installation



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, clip rotable, 2mts power cable and end caps.

Technical Information

Power	21W / 41W / 61W
Lumens	2.625 lm - 8.235 lm
Installation	Surface
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	4	Asymmetric (15°/35°)	9	420mm	1	2.700K (125 lm/W)	2	On / Off	1	Black (9005)	2
				820mm	2	3.000K (130 lm/W)	3	Dali	2	Custom RAL	C
				1.220mm	3	4.000K (135 lm/W)	4				

Code: 4 9 2

CE RoHS EAC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥80 | DALI 2



Triton down





Control accessories pages 294-307.

*Finished luminaire. Includes power supply, 2mts power cable and end caps.

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5.152 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	4	Opal (80°)	6	1.130mm	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4			Custom RAL	C
				1.970mm	6	5.500K (136 lm/W)	5				
				2.530mm	7						

Code: 4 6

Consult delivery terms and conditions.

*Create your code acording to your preferences.

Accessories



Wall bracket
- 40531
- 40532



Ceiling suspension
- 40510



Suspension Kit
- 40520 (2m)

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥95 | DALI 2

Blaber acoustic panels for custom system

BLABER is a line of acoustic panels made of PET felt, and in some models adapted to a line of luminaires to achieve maximum acoustic comfort for your projects, eliminating reverberation. The level of sound absorption will be palpable from day one.
The main objective of Blaber is to eliminate the residual sound that is commonly found in most spaces.
Discovering the sound of silence will make your spaces more pleasant to work, rest or enjoy the sensation of a place without noise or reverberation.
It has been proven that a healthy listening environment increases productivity and improves communication between people in it.
In addition, acoustic comfort, and regulations regarding maximum noise levels, make optimal sound quality more essential than ever.
Spaces such as offices and restaurants often experience heavy people traffic, that is why it is so important that, in addition to an attractive design, the materials manage to absorb sound to create a more comfortable and relaxed environment.
For this reason, architects and designers are increasingly interested in providing acoustic solutions to any space and Blaber is a guarantee of success in this regard.

BLABER es una gama de paneles acústicos de fieltro PET, y en algunos modelos adaptados a una línea de luminarias para lograr el máximo confort acústico para tus proyectos, eliminando la reverberación. El nivel de absorción del sonido será palpable desde el primer día.
El objetivo principal de la línea Blaber es eliminar el sonido residual que se encuentra habitualmente en prácticamente cualquier espacio.
Descubrir el sonido del silencio, hará que tus espacios sean más agradables para trabajar, descansar o disfrutar de la sensación que produce un lugar sin ruido ni reverberación
Está demostrado que un entorno auditivo saludable aumenta la productividad y mejora la comunicación entre las personas que se encuentran en él.
Además, el confort acústico, y las regulaciones relativas a los niveles máximos de ruido, hacen que la calidad de sonido óptima sea más importante que nunca.

Los espacios como oficinas y restaurantes a menudo experimentan un intenso tráfico de personas, por eso es tan importante que, además de un atractivo diseño, los materiales logren absorber el sonido para crear un ambiente más cómodo y relajado.
Por esta razón, son cada vez más los arquitectos y diseñadores que ponen especial interés en proveer de soluciones acústicas a cualquier espacio y Blaber es garantía de éxito en ese sentido.



Fire resistance
EN 13501-1+A1: B-s2, d0

Acoustic absorption
UNE-EN ISO 354:2004
Up to αw = 1 (-)
EN ISO 11654: Class A

Composition
100% PET
min. 60% Recycled

Environment
Recyclable, Low
VOC, REACH, EPD

Each panel contains
159 recycled PET bottles

Format
2440 mm x 1220 mm

Thickness
12 mm

Weight
2.440 g / m 2

Density
271 kg/m 3


Environmentally friendly
Recyclable, low VOC content, REAACH

EPD®
THE INTERNATIONAL EPD SYSTEM

We have a range of standard colors available and there is the possibility to manufacture custom colors for our colored PET felt acoustic panels with a minimum quantity.

Disponemos de una gama de colores estándar y existe la posibilidad de fabricar colores personalizados para nuestros paneles acústicos de fieltro PET de color con una cantidad mínima.

Standard colors



6



8



9



C6



D4



D6

Custom colors



C




New

Blaber pick




Blaber thickness: 12mm



Equipment

455x47x28mm



1.328/1.552/1.776/2.000mm

Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	25W / 30W / 34W / 38W
Lumens	2.250 lm - 5.320 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 68)

Code	
Pendant	8

Diffuser (Angle)	
Opal (100°)	2
Transparent (30°)	4

Size	
1.328mm	2
1.552mm	3
1.776mm	4
2.000mm	9

CCT (lm/W)	
2.700K (130 lm/W)	2
3.000K (135 lm/W)	3
4.000K (140 lm/W)	4
1.800-4.000K (90 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7


Colour	
Black	6
Light gray	8
Orange	9
ⓘ Light blue	C6
ⓘ Yellow	D4
ⓘ Beige	D6
ⓘ Custom	C

Code: 8

*Create your code acording to your preferences. CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C

CE RoHS


5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | tuya | PUSH | DALI 2


▶ VIDEO

Blaber line



Equipment

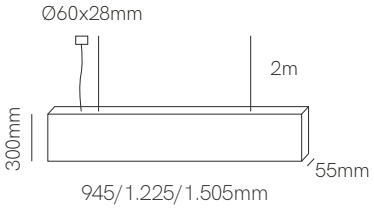

Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	30W / 39W / 49W
Lumens	2.730 lm - 5.047 lm
Installation	Pendant
Material	Aluminium and PET felt
PCB	Rigid

Code		Diffuser (Angle)	
Line	B	Black Slats (60°)	9

Size	
945mm	2
1.225mm	3
1.505mm	4

CCT (lm/W)	
2.700K (91 lm/W)	2
3.000K (96 lm/W)	3
4.000K (103 lm/W)	4
N 2.700-5.500K (95 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
N Tuya	7

Colour		
	Black	6
	Light gray	8
	Orange	9
ⓘ	Light blue	C6
ⓘ	Yellow	D4
ⓘ	Beige	D6
ⓘ	Custom	C

Code: B 9

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C


CE RoHS

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | tuya | PUSH | DALI 2



Blaber r





Ø400/700/900/1.000mm
Blaber thickness: 12mm

Code	
Round	**BR**

Size	
400mm	**5**
700mm	**6**
900mm	**7**
1.000mm	**8**

Installation	
Sound Absorbing	**32**
Pendant	**92**


Colour		
	Black	**6**
	Light gray	**8**
	Orange	**9**
ⓘ	Light blue	**C6**
ⓘ	Yellow	**D4**
ⓘ	Beige	**D6**
ⓘ	Custom	**C**

Code: **BR** _ _ _

New

Blaber custom





Ø700/900/1.000mm
Blaber thickness: 12mm

Code	
Custom	**B**

Size	
700mm	**6**
900mm	**7**
1.000mm	**8**

Led light	
Nano pulsar 3,5W (page 415)	**A**
Pulsar 8W (page 417)	**B**
Oxo 12W (page 425)	**D**
Tao 10W (page 437)	**E**
Thessis 15W (page 441-443)	**F**
Thessis 25W (page 441-443)	**G**
Ⓟ Custom	**C**

Units	
1	
2	
3	
4	
5	
6	
Custom	**C**

Driver	
Dali	**2**
Triac	**4**

Colour		
	Black	**6**
	Light gray	**8**
	Orange	**9**
ⓘ	Light blue	**C6**
ⓘ	Yellow	**D4**
ⓘ	Beige	**D6**
ⓘ	Custom	**C**

Code: **B** _ _ _ _ _ _

Led light not included, must be ordered separately, please specify product codes in the order.

Ⓟ Consult with project department to combine sound absorbing with luminaires.

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | | 100% PET |




Blaber sq




Blaber thickness: 12mm




1.195x295mm



2m



1.195x595mm



595x595mm

Code	
Square	**BC**

Size	
595x595mm	**3**
1.195x595mm	**4**
N 1.195x295mm	**5**

Installation	
Pendant	**32**
Armstrong	**92**


Colour	
Black	**6**
Light gray	**8**
Orange	**9**
ⓘ Light blue	**C6**
ⓘ Yellow	**D4**
ⓘ Beige	**D6**
ⓘ Custom	**C**

Code: **BC**


New

Blaber mirrow






1.195x595mm



595x595mm

Code		Size		Finishes		CCT (lm/W)		Driver		Colour	
Mirrow	C	595x595mm (85W)	3	White (9003)	1	2.700K (100 lm/W)	2	On / Off	1	Black	6
		1.195x595mm (94W)	4	Black (9005)	2	3.000K (105 lm/W)	3	Dali	2	Light gray	8
				ⓘ Custom RAL	C	4.000K (111 lm/W)	4	Push	3	Orange	9
						RGB-W (100 lm/W)	8	Casambi	5	ⓘ Light blue	C6
						2.700-5.500K (105 lm/W)	9	Tuya	7	ⓘ Yellow	D4
										ⓘ Beige	D6
										ⓘ Custom	C


Code: C

New

Blaber evo

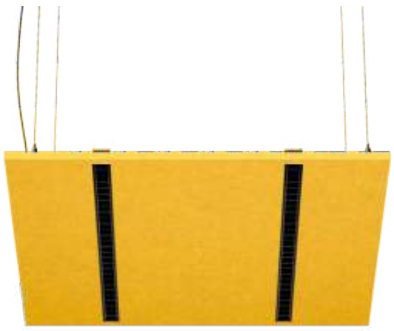

Blaber thickness: 12mm




1.195x595mm


595x595mm

Code		Size		Led light		CCT (lm/W)		Driver		Colour	
Pendant	P	595x595mm	3	Led line	1	2.700K (91 lm/W)	2	On / Off	1	Black	6
Amstrong	A	1.195x595mm	4	Led line	2	3.000K (96 lm/W)	3	Dali	2	Light gray	8
				Led line	3	4.000K (103 lm/W)	4	Push	3	Orange	9
						RGB-W (86 lm/W)	8	Casambi	5	ⓘ Light blue	C6
						2.700-6.500K (95 lm/W)	9			ⓘ Yellow	D4
										ⓘ Beige	D6
										ⓘ Custom	C

Code:

Control accessories pages 294-307.

*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya. .

Consult with project department to combine sound absorbing with luminaires.

ⓘ Consult delivery terms and conditions.


RoHS


5 YEARS WARRANTY | | | | 100% PET |



New

Blaber zero direct

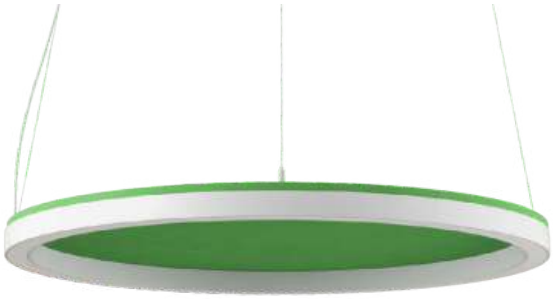




Code		Size / Power		Finishes		CCT (lm/W)		Driver		Colour	
Zero direct	Z	520mm / 35W	0	White (9003)	1	2.700K (66 lm/W)	2	On / Off	1	Black	6
		800mm / 55W	2	Black (9005)	2	3.000K (72 lm/W)	3	Dali	2	Light gray	8
		1.200mm / 75W	6	ⓘ Custom RAL	C	4.000K (78 lm/W)	4	Push	3	Orange	9
						2.700-5.500K (70 lm/W)	9	Casambi	5	ⓘ Light blue	C6
								Tuya	7	ⓘ Yellow	D4
										ⓘ Beige	D6
										ⓘ Custom	C

Code: Z

New

Blaber zero in XL





Code		Size / Power		Finishes		CCT (lm/W)		Driver		Colour	
Zero in XL	N	400mm / 37W	1	White (9003)	1	2.700K (150 lm/W)	2	On / Off	1	Black	6
		700mm / 65W	2	Black (9005)	2	3.000K (155 lm/W)	3	Dali	2	Light gray	8
		1.000mm / 94W	3	ⓘ Custom RAL	C	4.000K (160 lm/W)	4	Push	3	Orange	9
						RGB-W (50 lm/W)	7	Casambi	5	ⓘ Light blue	C6
						2.700-5.500K (100 lm/W)	9	Tuya	7	ⓘ Yellow	D4
										ⓘ Beige	D6
										ⓘ Custom	C

Code: N

Control accessories pages 294-307.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya. ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | | 100% PET |




New

Blaber mac





55mm



Ø520/700/900mm

Control accessories pages 294-307.

*Finished luminaire. Includes power cable.

Technical Information

Power	23W / 33W / 45W
Lumens	1.552 lm - 5.400 lm
Installation	Wall
Material	Aluminium and PET felt
PCB	Flex (fine 96)

Code	
Mac	**MC**

Size	
520mm	**1**
700mm	**2**
900mm	**3**
ⓘ Custom	**C**

CCT (lm/W)	
3.000K (106 lm/W)	**3**
4.000K (120 lm/W)	**4**
RGB-W (67,5 lm/W)	**8**

Driver	
On / Off	**1**
Dali	**2**
Push	**3**
Casambi	**5**
Tuya	**7**


Colour	
Black	**6**
Light gray	**8**
Orange	**9**
ⓘ Light blue	**C6**
ⓘ Yellow	**D4**
ⓘ Beige	**D6**
ⓘ Custom	**C**

Code: **MC** _ _ _ _ _

*Create your code acording to your preferences. RGB-W only works with driver 5 Casambi and 7 Tuya.

ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C

CE RoHS

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2




New

Blaber atmos



*Included surface and recessed base.



Ø400/520/700mm

Code		Size		Led light		Driver		Colour	
Atmos	A	400mm	1	○ Atmos XL 10W white (page 515)	1	Switch	9	Black	6
		520mm	2	● Atmos XL 10W black (page 515)	2			Light gray	8
		700mm	3					Orange	9
								ⓘ Light blue	C6
								ⓘ Yellow	D4
								ⓘ Beige	D6
								ⓘ Custom	C


Code: A _ _ 9 _

New

Blaber atmos slim



*Included surface and recessed base.



Ø400/520/700mm

Code		Size		Led light		Driver		Colour	
Atmos slim	A	400mm	4	○ Atmos slim XL 6W white (page 513)	1	Tuya	7	Black	6
		520mm	5	● Atmos slim XL 6W black (page 513)	2			Light gray	8
		700mm	6					Orange	9
								ⓘ Light blue	C6
								ⓘ Yellow	D4
								ⓘ Beige	D6
								ⓘ Custom	C


Code: A _ _ 7 _

*Create your code acording to your preferences.


ⓘ Consult delivery terms and conditions.


RoHS

5 YEARS WARRANTY | | | 100% PET |

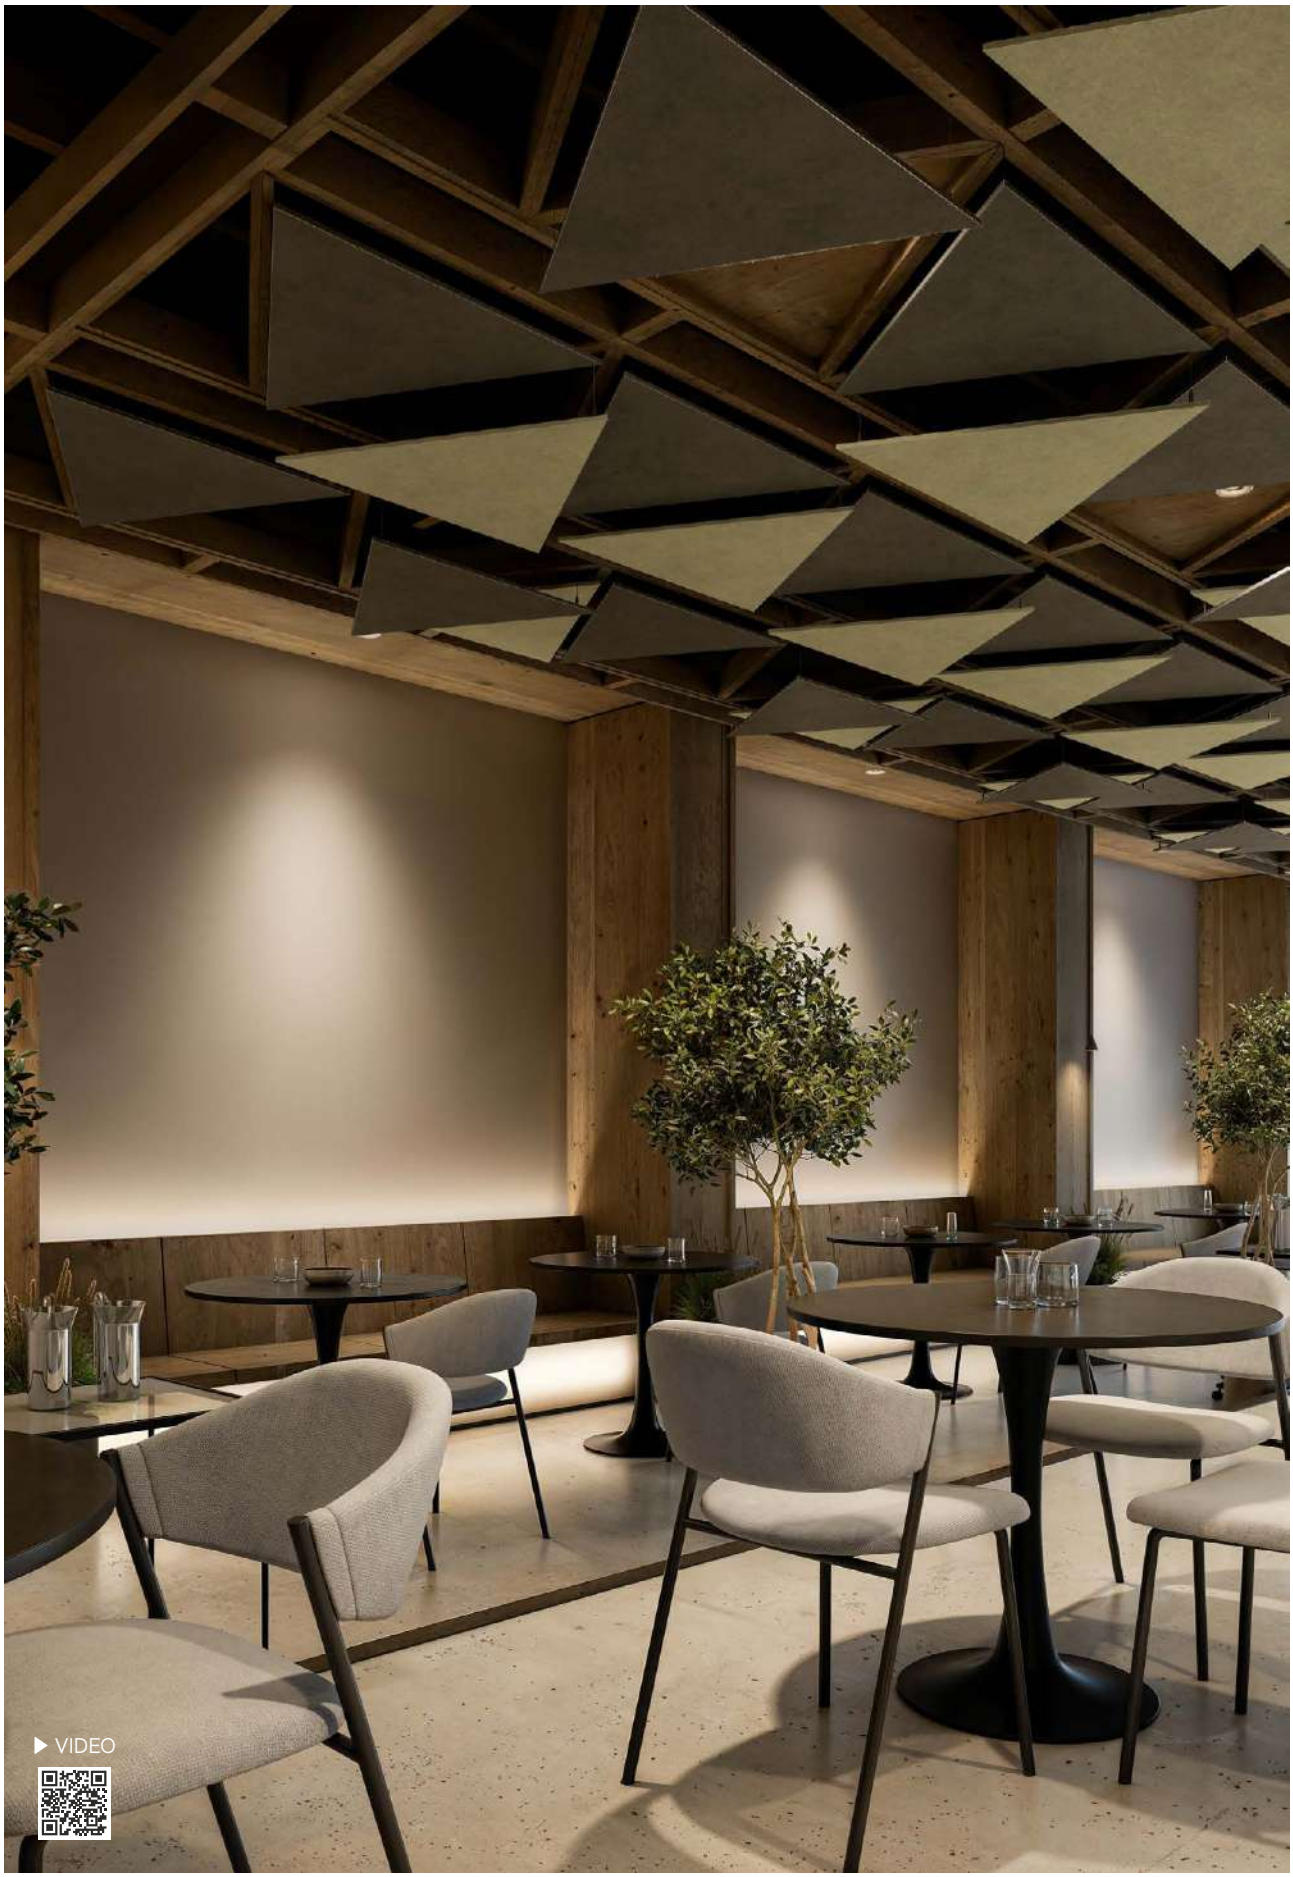
▶ VIDEO

Blaber trgl

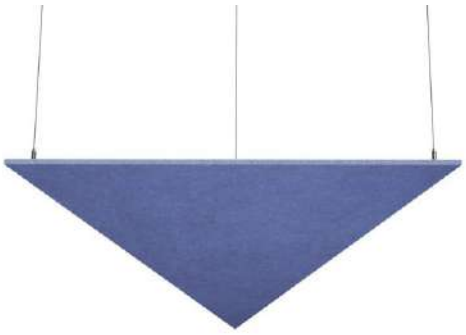



600x600x600mm
840x840x840mm
Blaber thickness: 12mm


Code		Size		Installation		Colour		
Triangular	**BT**	600x600x600mm	**1**	Sound Absorbing	**32**	Black	**6**
		840x840x840mm	**2**	Pendant	**92**	Light gray	**8**
						Orange	**9**
						ⓘ Light blue	**C6**
						ⓘ Yellow	**D4**
						ⓘ Beige	**D6**
						ⓘ Custom	**C**

Code: **BT**

New

Blaber tax





600x600x600mm
840x840x840mm

Code		Size		Finishes		CCT (lm/W)		Driver		Colour	
Tax	**T**	600x600x600mm (52W)	**4**	White (9003)	**1**	2.700K (100 lm/W)	**2**	On / Off	**1**	Black	**6**
		840x840x840mm (64W)	**8**	Black (9005)	**2**	3.000K (105 lm/W)	**3**	Dali	**2**	Light gray	**8**
				ⓘ Custom RAL	**C**	4.000K (111 lm/W)	**4**	Push	**3**	Orange	**9**
						RGB-W (100 lm/W)	**8**	Casambi	**5**	ⓘ Light blue	**C6**
						2.700-5.500K (105 lm/W)	**9**	Tuya	**7**	ⓘ Yellow	**D4**
										ⓘ Beige	**D6**
										ⓘ Custom	**C**

Code: **T**

Control accessories pages 294-307.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Consult with project department to combine sound absorbing with luminaires.

ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | | 100% PET |

Custom system accessories

Time

End caps
- ☐ 40741
- ■ 40742
- ▢ 40743

End caps
- ☐ 40751
- ■ 40752
- ▢ 40753



Joint 180°
- ■ 40770



Joint 90°
- ■ 40990



Joint 90°
- ■ 40410



Joint 120°
- ■ 40666



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ■ 40339

Urban

End caps
- ☐ 40721
- ■ 40722
- ▢ 40723

End caps
- ☐ 40731
- ■ 40732
- ▢ 40733



Joint 180°
- ■ 40220



Joint 90°
- ■ 40550



Joint 90°
- ■ 40610



Joint 120°
- ■ 40999



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ■ 40669

Time / Urban



Base 3x0,75 (2,5m)
Ø60x28mm
- ○ 40881
- ● 40882
- ◌ 40883



Base 5x0,5 (2,5m)
Ø60x28mm
- ○ 40991
- ● 40992
- ◌ 40993



Base 3x0,75 (5m)
Ø60x28mm
- ○ 40581
- ● 40582
- ◌ 40583



Base 5x0,5 (5m)
Ø60x28mm
- ○ 40591
- ● 40592
- ◌ 40593



Ceiling suspension
- ● 40780



Suspension kit
- ● 40790 (2m)
- ● 40795 (5m)



Recessed base
3x0,75 (2,5m)
Ø75x30mm
- ○ 40831
- ● 40832
- ◌ 40833



Recessed base
5x0,5 (2,5m)
Ø75x30mm
- ○ 40931
- ● 40932
- ◌ 40933



Recessed base
3x0,75 (5m)
Ø75x30mm
- ○ 40481
- ● 40482
- ◌ 40483



Recessed base
Base 5x0,5 (5m)
Ø75x30mm
- ○ 40541
- ● 40542
- ◌ 40543

Zero Design



End Cap
- ☐ 40631
- ■ 40632
- ■ 40634
- ■ 40635



Suspension Kit Metallic (2m)
- ◉ 34720
- ○ 34721
- ● 34722



Ceiling suspension
- ■ 40430



Kit Joint Metallic
- ■ 40490
- ☐ 40491
- ■ 40492



Base Ø330x41mm

○	Z12411	● Z12412	240W/24VDC ON/OFF
○	Z12421	● Z12422	200W/24VDC DALI
○	Z12431	● Z12432	240W/24VDC PUSH
○	Z12451	● Z12452	240W/24VDC CASAMBI
○	Z12471	● Z12472	240W/24VDC TUYA



Base Ø280x41mm

○	Z11511	● Z11512	150W/24VDC ON/OFF
○	Z11521	● Z11522	120W/24VDC DALI
○	Z11531	● Z11532	150W/24VDC PUSH
○	Z11551	● Z11552	150W/24VDC CASAMBI
○	Z11571	● Z11572	150W/24VDC TUYA



Base Ø250x41mm

○	Z11011	● Z11012	75W/24VDC ON/OFF
○	Z11021	● Z11022	75W/24VDC DALI
○	Z11031	● Z11032	75W/24VDC PUSH
○	Z11051	● Z11052	75W/24VDC CASAMBI
○	Z11071	● Z11072	75W/24VDC TUYA


Power supplies linear box



Base 455x47x28mm

	☐ 35331	■ 35332	30W/24VDC on/off
	☐ 35361	■ 35362	60W/24VDC on/off
	☐ 35311	■ 35312	100W/24VDC on/off
New	☐ 35351	■ 35352	150W/24VDC on/off
New	☐ 35731	■ 35732	30W/24VDC dali
New	☐ 35761	■ 35762	60W/24VDC dali
New	☐ 35711	■ 35712	100W/24VDC dali
New	☐ 35751	■ 35752	150W/24VDC dali



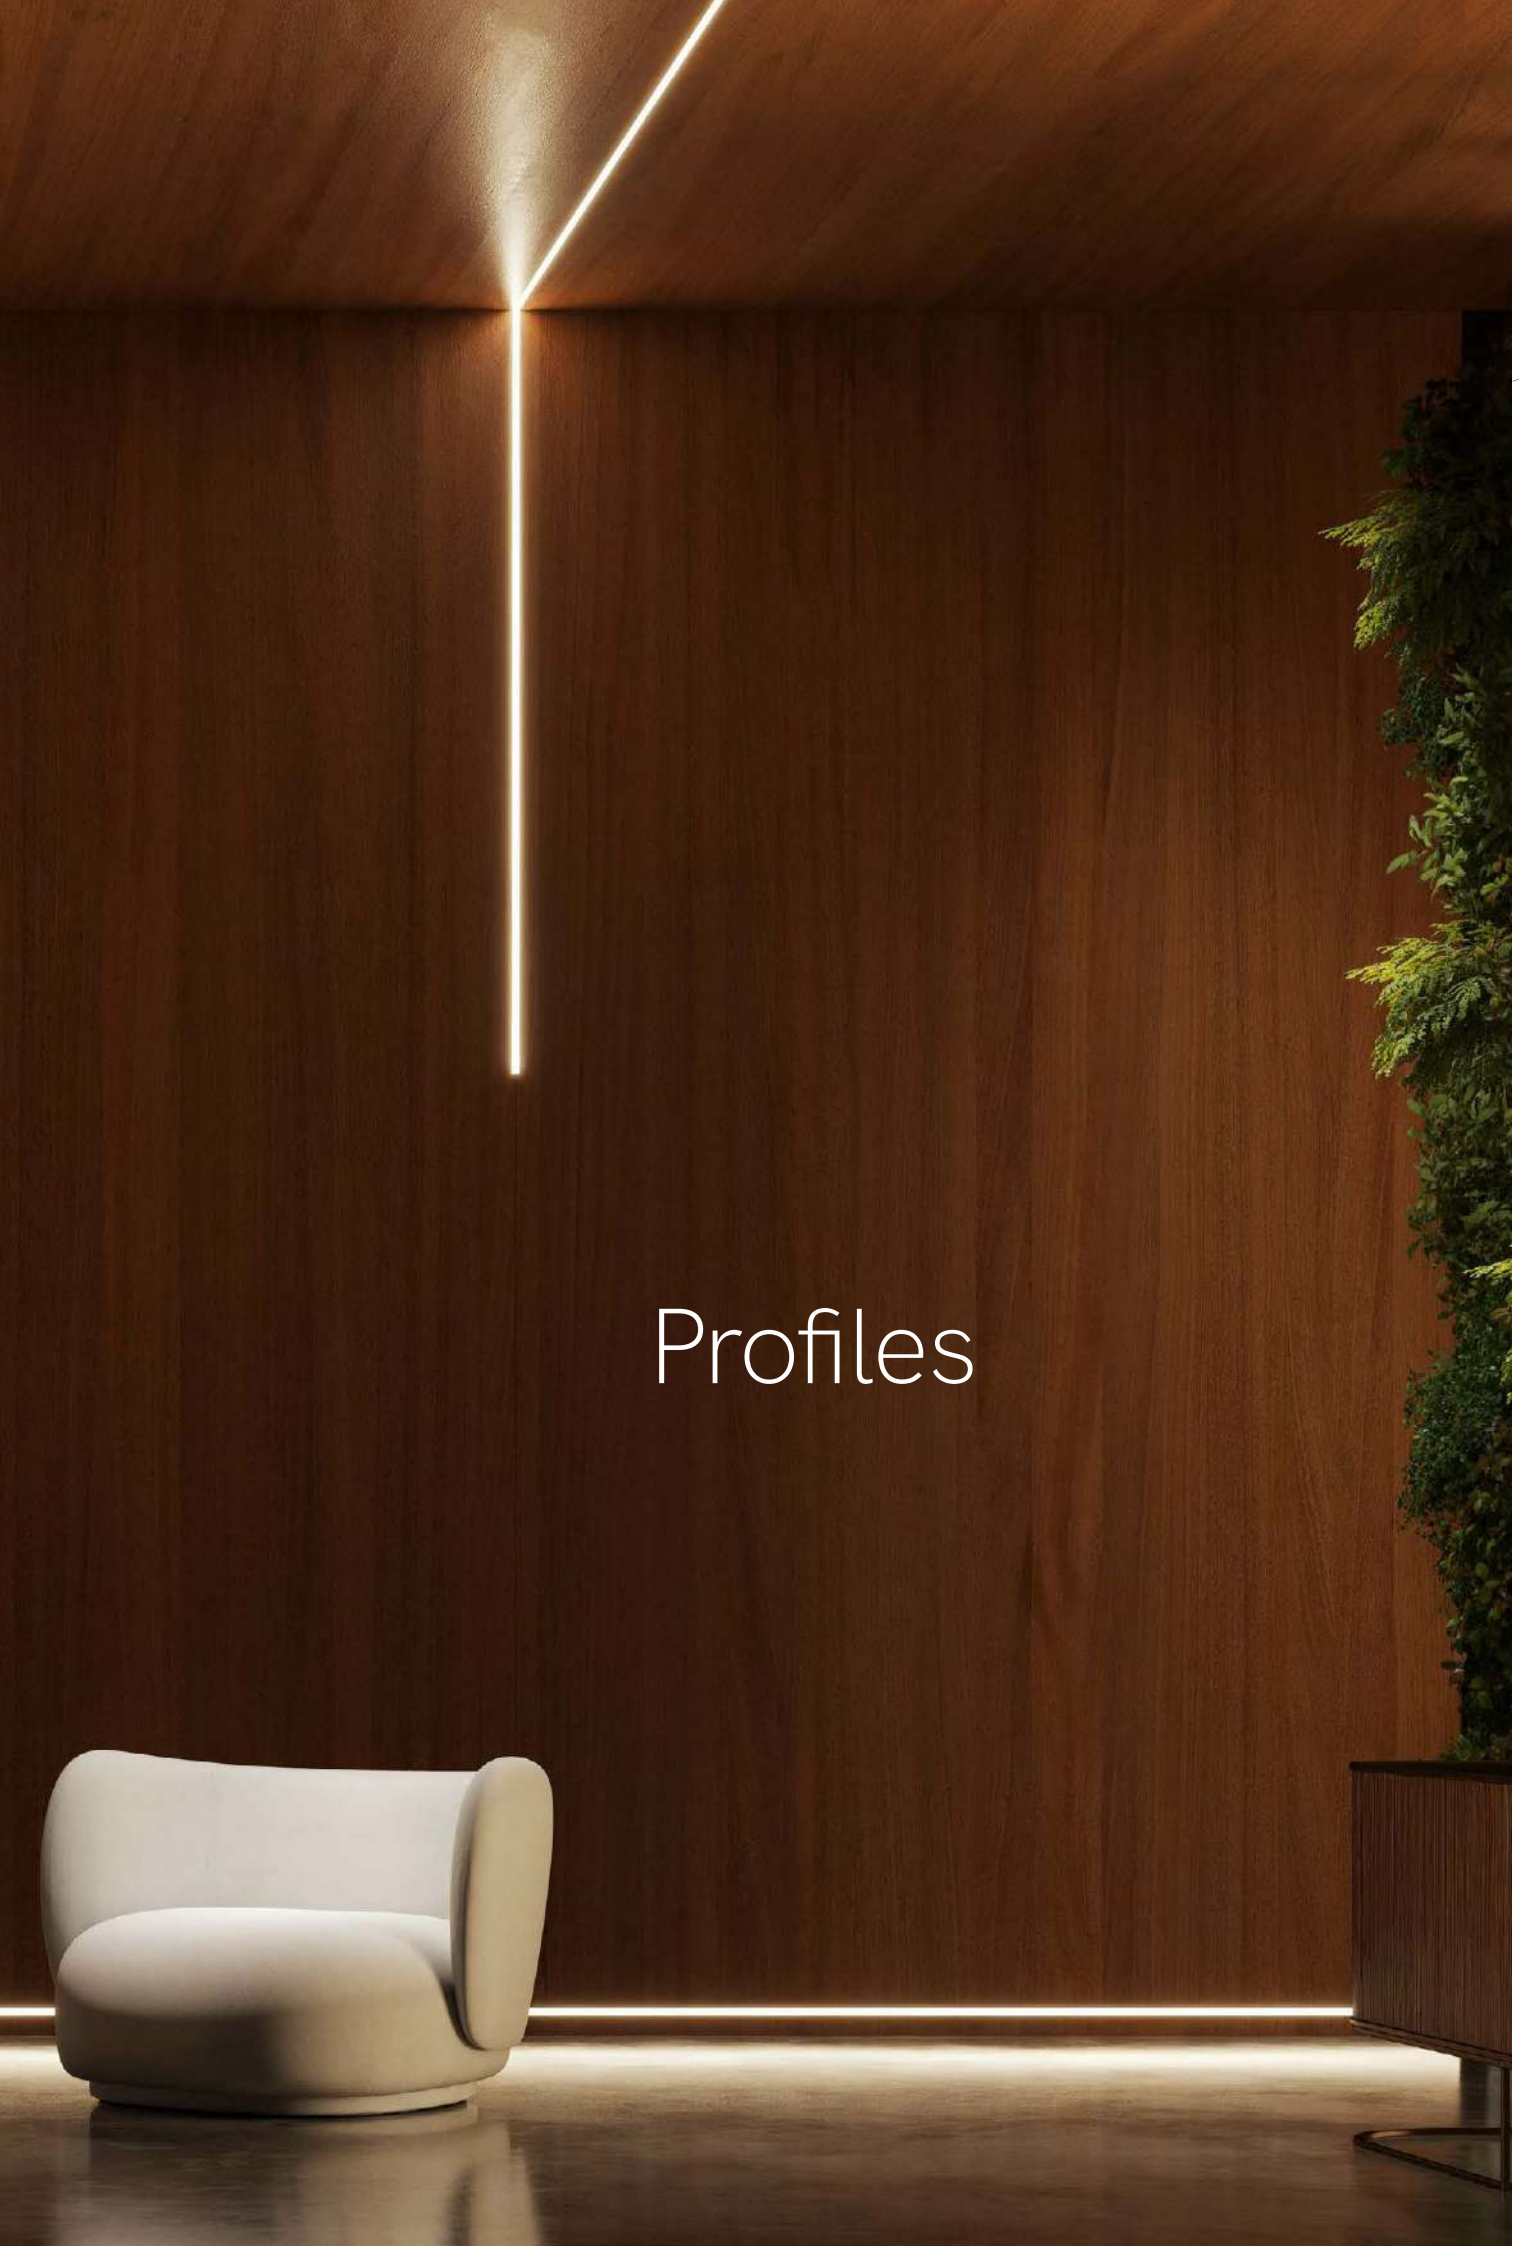

Profiles

	Model	Page	Section Size	Installation
	BOX 15	171	25x7 mm	Recessed
	BOX 16	171	17,3x7 mm	Surface
	BOX 17	172	25x14,5mm	Recessed
	BOX 18	172	17,3x14,5 mm	Surface
	BOX 53	173	30,5x10,8mm	Recessed
	BOX 23	173	23x10,8 mm	Surface
NEW	BOX 87	175	12,5x8,7 mm	Recessed
NEW	BOX 92	175	18,7x10,5 mm	Recessed
NEW	BOX 74	176	26,5x12,5 mm	Recessed
NEW	BOX 43	176	18,5x11,8 mm	Surface
	BOX 95	177	23,25x22 mm	Recessed
	BOX 75	177	16x24,5 mm	Surface / Pendant
	BOX 38	179	50x35 mm	Recessed
	BOX 35	179	35x35 mm	Surface / Pendant
	BOX 14	180	16x16 mm	Surface / Corner
	BOX 71	180	18,4x18,4 mm	Surface / Corner
	BOX 60	181	20x16 mm	Surface / Corner
	BOX 99	183	10x12 mm	Surface / Pendant
	BOX 11	184	16x15 mm	Recessed
	BOX 12	184	10x15 mm	Surface

Max Power	IP	Standard finishes	Standard Size
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Alum.	2m
15W MAX	20 IP	Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	Alum.	2m

	Model	Page	Section Size	Installation
	BOX 13	185	17,9x5,7 mm	Surface / Flex
	BOX 10	186	35x25 mm	Recessed
	BOX 19	186	25x25 mm	Surface / Pendant
	BOX 37	187	79x32 mm	Trimless
	BOX 24	189	29,5x17,4 mm	Recessed
NEW	BOX 69	191	56,4x13,3 mm	Trimless
	BOX 68	193	60x13 mm	Trimless
NEW	BOX 32	193	35,9x14 mm	Trimless
	BOX 22	194	17,8x48,6 mm	Surface
	BOX 33	195	29,4x50 mm	Surface
	BOX 98 railing	197	78,8x95 mm	Surface / Railing
	BOX 21	198	26,2x76,2 mm	Recessed
	BOX 27	199	17,7x43,5 mm	Surface
	BOX 65	201	15x80 mm	Surface / Skirting
	BOX 67	203	65x28 mm	Surface / Stairs
	BOX 39	204	Ø28 mm	Surface / Pendant
	BOX 28	205	18x22,2 mm	Surface
	BOX 29	207	21x26mm	Recessed
	BOX 73	208	21x21 mm	Surface
	BOX 30	209	12x2 mm / 20x2mm	Surface


Max Power	IP	Standard finishes	Standard Size
15W MAX	20 IP	Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
40W MAX	40 IP	White	2m
20W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black	2m
20W MAX	20 IP	White	2m
2x15W MAX	20 IP	Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
30W MAX	20 IP	White Black	2m
15W MAX	20 IP	White Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	Black	2m
25W MAX	20 IP	Black	2m
40W MAX	20 IP	Alum.	2m
25W MAX	55 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
20W MAX 40W MAX	20 IP	Alum.	2m



Box 15








*Useful area: 12x5mm.



115°

Box 16






*Useful area: 12x5mm.



115°

Compatible led strips.



Box 15 Box 16

Technical Information

	Box 15	Box 16
Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 15	Box 16
	☐ 15121	☐ 16121
	■ 15122	■ 16122
	▩ 15119	▩ 16119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20450

Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15

Box 15 accessories



End Cap
☐ 15631
■ 15632
▩ 15633



End Cap
☐ 15621
■ 15622
▩ 15623

Box 16 accessories



End Cap
☐ 16631
■ 16632
▩ 16633



End Cap
☐ 16621
■ 16622
▩ 16623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350

Clip PC
▩ 20380
■ 20382

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 17




Box 18







18mm x L

*Useful area: 12x10mm.







*Useful area: 12x10mm.



65°



65°




60°

Box 17

Box 18

Compatible led strips.



Technical Information

	Box 17	Box 18
Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 17	Box 18
	☐ 17121	☐ 18121
	■ 17122	■ 18122
	▩ 17119	▩ 18119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20450

Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15

Box 17 accessories



End Cap
☐ 17631
■ 17632
▩ 17633



End Cap
☐ 17621
■ 17622
▩ 17623

Box 18 accessories



End Cap
☐ 18631
■ 18632
▩ 18633



End Cap
☐ 18621
■ 18622
▩ 18623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350

Clip PC
▩ 20380
■ 20382



End Cap 60°
☐ 18651
■ 18652
▩ 18653



End Cap 60°
☐ 18661
■ 18662
▩ 18663



Diffuser PC Optic 60° Transp. 90%
☐ 20430


CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063


Box 53



25mm x L




*Useful area: 20x6mm.




115°

Box 23






*Useful area: 20x6mm.



115°

Compatible led strips.



Box 53 Box 23

Technical Information

	Box 53	Box 23
Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 53	Box 23
	☐ 53121	☐ 23121
	■ 53122	■ 23122
	▢ 53119	▢ 23119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC
Opal 70%
▢ 23480

Box 53 accessories



End Cap
☐ 53631
■ 53632
▢ 53633



End Cap
☐ 53621
■ 53622
▢ 53623

Box 23 accessories

End Cap
☐ 23631
■ 23632
▢ 23633

End Cap
☐ 23621
■ 23622
▢ 23623



Clip PC
▢ 23380

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063


MILAN
4865
MADE IN GERMANY
STAEDTLER

New

Box 87



11mm x L



*Useful area: 5x2,5mm.




70°

Box 92



14,5mm x L




*Useful area: 12x3mm.



95°

Compatible led strips.



Box 87 

Box 92 

Technical Information

	Box 87	Box 92
Max. power	15W/m	15W/m
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	Black / Aluminium	Aluminium

Code	Box 87	Box 92
	■ 87122	□ 92119
	□ 87119	ⓘ Custom RAL
	ⓘ Custom RAL	

ⓘ Consult delivery terms and conditions.

Box 87 accessories


Diffuser PC Opal 70%
□ 87440


Diffuser PC Black 50%
■ 87520


End Cap
■ 87632
□ 87633


End Cap
■ 87622
□ 87623


Clip Metallic
■ 87330

Box 92 accessories

Diffuser PC Opal 70%
□ 92440


End Cap
□ 92633


End Cap
□ 92623


Clip Metallic
■ 92330

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063


New


Box 74



Box 43



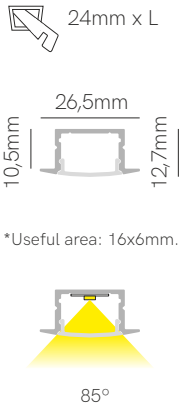



Box 74

Box 43

Compatible led strips.

Technical Information

	Box 74	Box 43
Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 74	Box 43
	☐ 74121	☐ 43121
	■ 74122	■ 43122
	☐ 74119	☐ 43119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 43440

Box 74 accessories



End Cap
☐ 74631
■ 74632
☐ 74633



End Cap
☐ 74621
■ 74622
☐ 74623

Box 43 accessories

End Cap
☐ 43631
■ 43632
☐ 43633

End Cap
☐ 43621
■ 43622
☐ 43623



Clip Metallic
☐ 43330



Clip 45° Metallic
☐ 43530

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063


Box 95






21mm x L


*Useful area: 12x3mm.





Box 75






*Useful area: 12x3mm.



Compatible led strips.



Box 95 Box 75

Technical Information

	Box 95	Box 75
Max. power	22W/m	15W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 95	Box 75
	☐ 95121	☐ 75121
	■ 95122	■ 75122
	▩ 95119	▩ 75119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Opal Prismatic
☐ 75440

Box 95 accessories



End Cap
☐ 95631
■ 95632
▩ 95633

End Cap
☐ 95621
■ 95622
▩ 95623

Clip Metallic
● 24710

Box 75 accessories



End Cap
☐ 75621
■ 75622
▩ 75623

Hanging bracket Metallic
▩ 75330

Suspension Kit Metallic
● 75720 (2m)


CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



Box 38








*Useful area: 23x20mm.

Box 35






*Useful area: 23x20mm.



Compatible led strips.



Box 38 Box 35

Technical Information

	Box 38	Box 35
Max. power	40W/m	40W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 38	Box 35
	☐ 38121	☐ 35121
	■ 38122	■ 35122
	▩ 38119	▩ 35119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20750

Diffuser PC Opal 70%
▩ 20700



Diffuser PC Black 50%
■ 20772

Joint 180° Metallic
▩ 20520



Joint 90° Metallic
▩ 20510



Joint 90° Metallic
▩ 20540

Joint 120° Metallic
▩ 20530

Box 38 accessories



End Cap
☐ 38621
■ 38622
▩ 38623



Spring Clip Metallic
▩ 20710

Box 35 accessories



End Cap
☐ 35621
■ 35622
▩ 35623



Clip Metallic
▩ 35330



Suspension Kit Metallic
● 20720 (2m)



Base 455x47x28mm


	☐ 35331	■ 35332	30W/24VDC on/off
	☐ 35361	■ 35362	60W/24VDC on/off
	☐ 35311	■ 35312	100W/24VDC on/off
NEW	☐ 35351	■ 35352	150W/24VDC on/off
NEW	☐ 35731	■ 35732	30W/24VDC dali
NEW	☐ 35761	■ 35762	60W/24VDC dali
NEW	☐ 35711	■ 35712	100W/24VDC dali
NEW	☐ 35751	■ 35752	150W/24VDC dali

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 14






*Useful area: 10x5mm.



Box 71





*Useful area: 14x5mm.



Box 14

Box 71

Compatible led strips.

Technical Information

	Box 14	Box 71
Max. power	15W/m	22W/m
Installation	Surface / corner	Surface / corner
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 14	Box 71
	○ 14121	□ 71121
	● 14122	■ 71122
	◯ 14119	▢ 71119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Box 14 accessories

Diffuser PC Opal 70%
○ 14480



End Cap
○ 14631
● 14632
◯ 14633



End Cap
○ 14621
● 14622
◯ 14623



Clip Metallic
◯ 14330

Box 71 accessories

Diffuser PC Opal 70%
▢ 71440



End Cap
□ 71631
■ 71632
▢ 71633



End Cap
□ 71621
■ 71622
▢ 71623




Clip Metallic
▢ 71330

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063


Box 60







*Useful area: 12x3mm.







Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 60121
	■ 60122
	▩ 60119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 60440



End Cap left
☐ 60631
■ 60632
▩ 60633



End Cap right
☐ 60621
■ 60622
▩ 60623




Clip Metallic
▩ 60330

CE RoHS


3 YEARS WARRANTY | IP 20 | 30°-60° | 2m Max | AL 6063



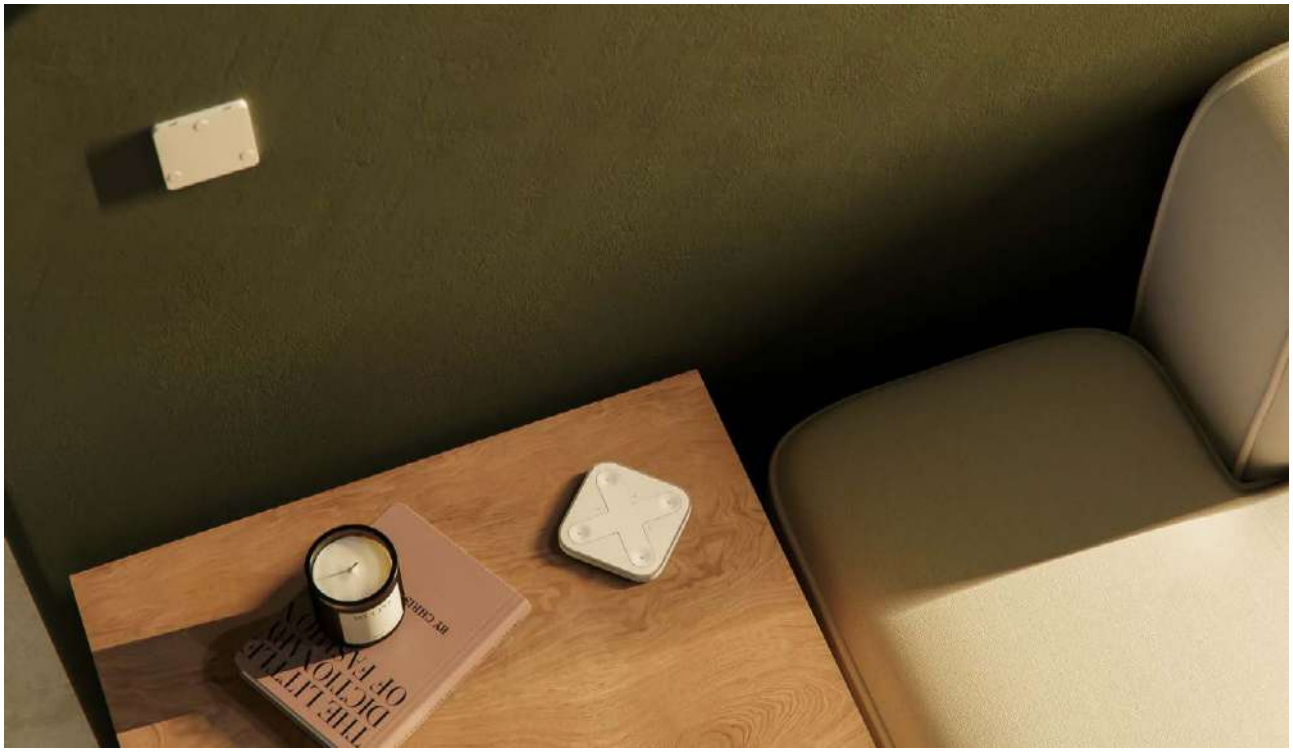

Box 99








*Useful area: 8x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black

Code	
	☐ 99121
	■ 99122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 99440



End Cap
☐ 99621
■ 99622



Suspension Kit Metallic
○ 99721 (2m)
● 99722 (2m)



Joint 90° Metallic
▩ 99510
■ 99512



Joint 90° Metallic
▩ 99540
■ 99542

Joint 180° Metallic
▩ 99520
■ 99522

CE RoHS


3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 11





12mm x L




*Useful area: 5x10mm.



35°

Box 12





*Useful area: 5x10mm.




35°

Box 11

Box 12

Compatible led strips.



Technical Information

	Box 11	Box 12
Max. power	15W/m	15W/m
Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	Aluminium	Aluminium
Code	☐ 11119	☐ 12119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 20480

Box 11 accessories



End Cap
☐ 11633



End Cap
☐ 11623

Box 12 accessories

Diffuser PC Opal 70%
☐ 20480



End Cap
☐ 12633



End Cap
☐ 12623




Clip
Metallic
■ 20730


CE RoHS


3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 13










*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface / flex
Material	Aluminium
Finishes	Aluminium

Code	☐ 13113

Accessories

Diffuser PC
Opal 70%
☐ 13480



End Cap
☐ 13633



End Cap
☐ 13623



Clip
Metallic
■ 13330


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 10











*Useful area: 12x17,7mm.

Box 10

Box 19







*Useful area: 12x17,7mm.

Box 19

Compatible led strips.

Technical Information

	Box 10	Box 19
Max. power	25W/m	25W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium	Aluminium
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 10	Box 19
	☐ 10121	☐ 19121
	■ 10122	■ 19122
	☐ 10119	☐ 19119
	Custom RAL	Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 20490



Diffuser PC Black 50%
■ 20502



Diffuser Continuous
○ 20997



Joint 90° Metallic
☐ 20510



Joint 90° Metallic
☐ 20540

Joint 120° Metallic
☐ 20530

Joint 180° Metallic
☐ 20520

Box 10 accessories



End Cap
☐ 10621
■ 10622
☐ 10623



Spring Clip Metallic
☐ 20710

Box 19 accessories



End Cap
☐ 19621
■ 19622
☐ 19623



Clip Metallic
☐ 19330



Suspension Kit Metallic
○ 20720 (2m)



Base 455x47x28mm

	☐ 35331	■ 35332	30W/24VDC on/off
	☐ 35361	■ 35362	60W/24VDC on/off
	☐ 35311	■ 35312	100W/24VDC on/off
NEW	☐ 35351	■ 35352	150W/24VDC on/off
NEW	☐ 35731	■ 35732	30W/24VDC dali
NEW	☐ 35761	■ 35762	60W/24VDC dali
NEW	☐ 35711	■ 35712	100W/24VDC dali
NEW	☐ 35751	■ 35752	150W/24VDC dali

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 37






40mm x L

*Useful area: 23x20mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Trimless
Material	Aluminium
Finishes	White

Code	☐ 37121
	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 37480

End Cap
☐ 37621


CE RoHS


3 YEARS WARRANTY | IP 40 | 2m Max | AL 6063


DEEP WATER
DAVE SIV
Little One
TAKE THAT NURSING HOMES AND SHOVE IT!
TO KILL A MOCKINGB IR D

Box 24








27mm x L

*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 24121
	■ 24122
	▩ 24119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 24440



End Cap
☐ 24631
■ 24632
▩ 24633




End Cap
☐ 24621
■ 24622
▩ 24623



Spring Clip Metallic
▩ 24710

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

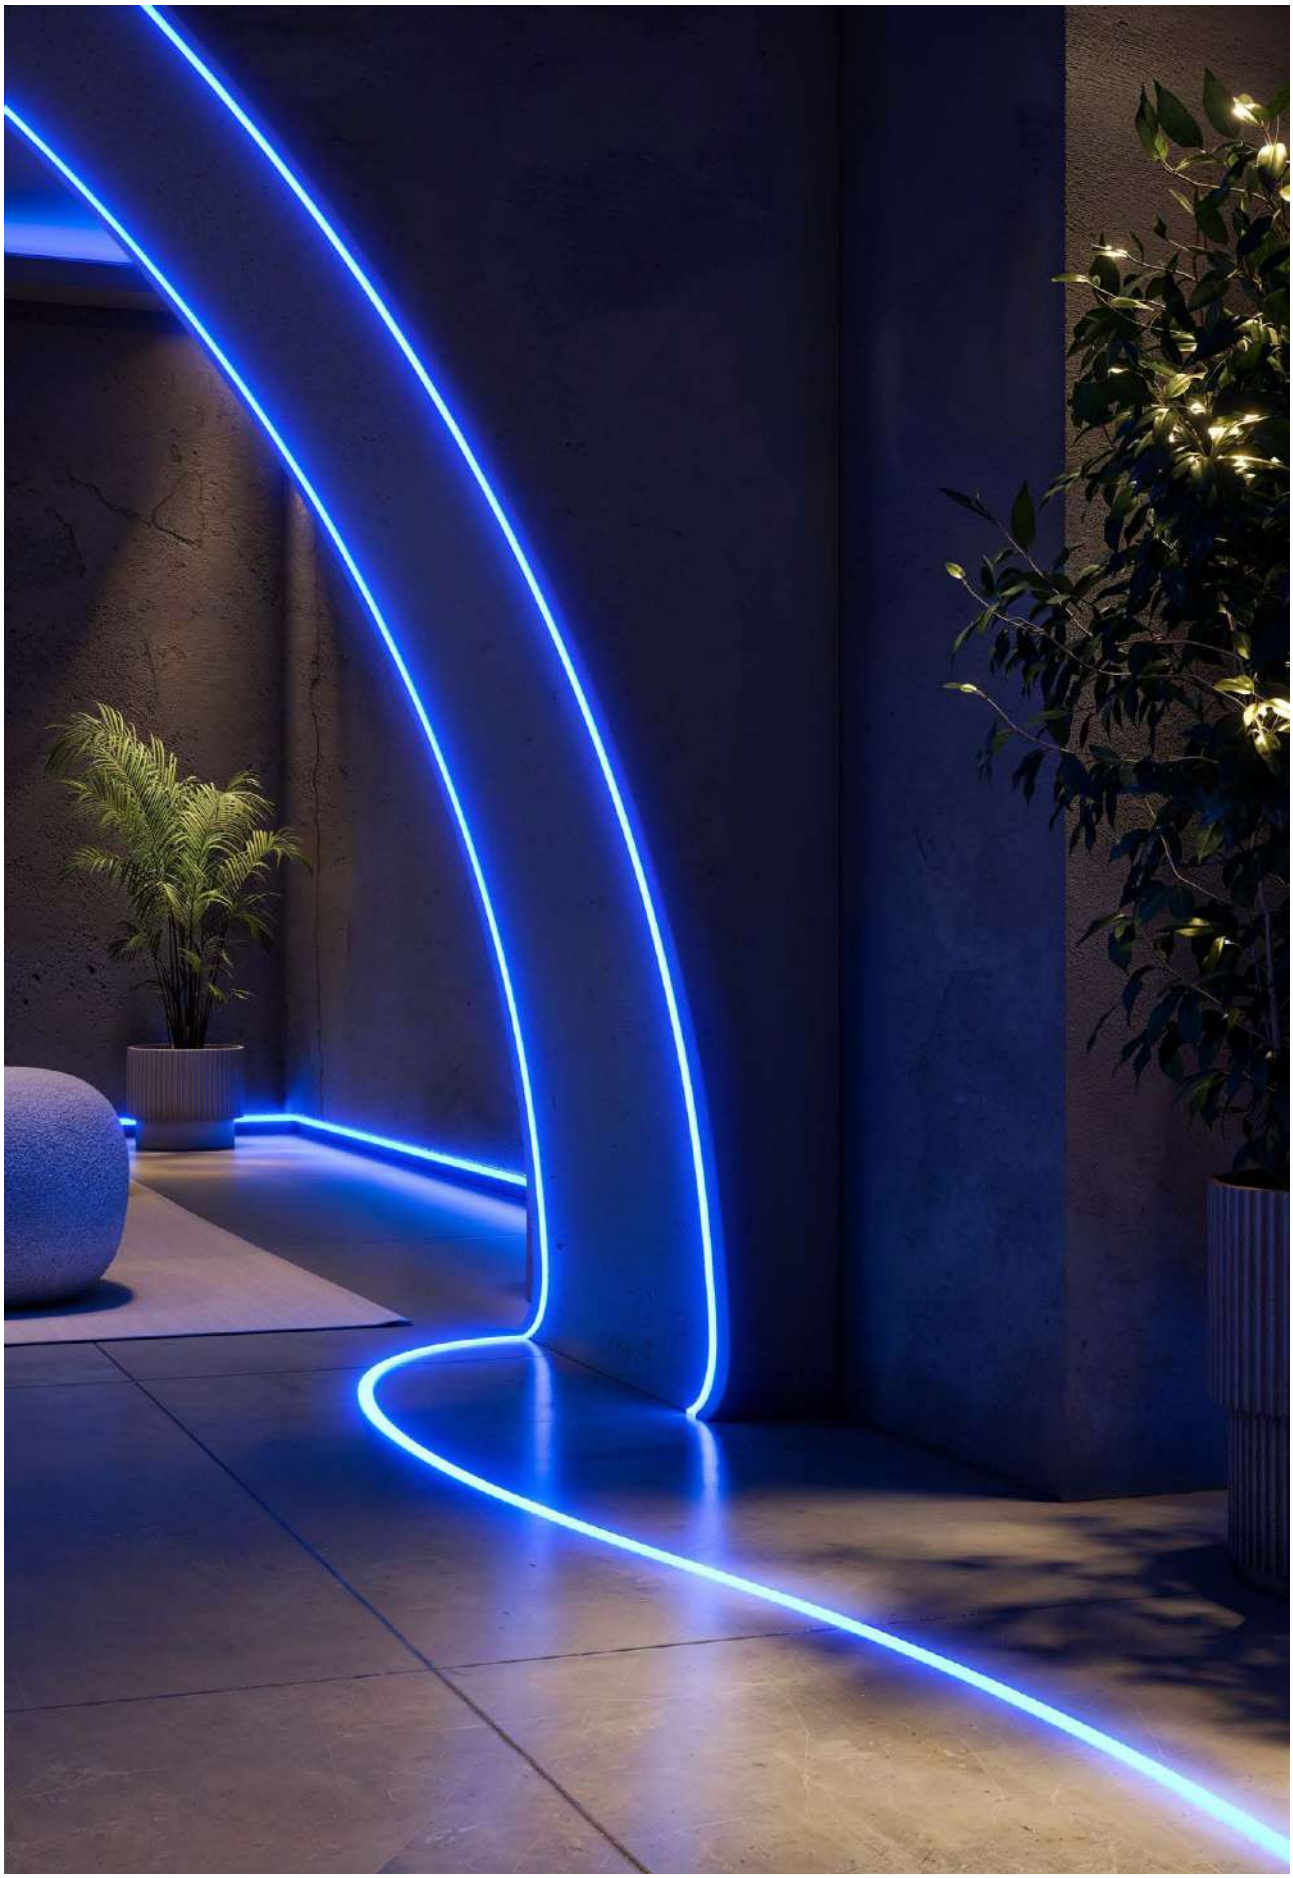


New


Box 69




16 x L

*Useful area: 10x3mm.





Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Trimless
Material	Aluminium
Finishes	Aluminium

Code	☐ 69119

Accessories



Diffuser Continuous (max. 20m)
○ 69440



End Cap
☐ 69633



End Cap
☐ 69623

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063


2
SHOWROO
TOILET
LIFT
RECEPTIO
HALL

New

Box 68






25mm x L


*Useful area: 12x3mm.




Box 32



*Useful area: 12x3mm.



Compatible led strips.



Box 68 Box 32

Technical Information

	Box 68	Box 32
Max. power	20W/m	20W/m
Installation	Trimless	Trimless
Material	Aluminium	Aluminium
Finishes	White / Black	White
Code	☐ 68121 ■ 68122	☐ 32121

Common accessories



Joint 90° Metallic ■ 68450
Joint 90° Metallic ■ 68510
Joint 180° Metallic ■ 68520

Box 68 accessories



Diffuser Continuous (max. 20m) ○ 68997
Diffuser Continuous (max. 20m) ● 68502
End Cap ☐ 68631 ■ 68632
End Cap ☐ 68621 ■ 68622

Box 32 accessories




Diffuser PC Opal 70% ☐ 32440
End Cap ☐ 32631
End Cap ☐ 32621


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 22







*Useful area: 12x3mm.

Compatible led strips.

Technical Information

Max. power	2x15W/m
Installation	Surface
Material	Aluminium
Finishes	Black / Aluminium

Code	
	■ 22122
	□ 22119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
□ 20497



Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15

End Cap
■ 22622
□ 22623




Clip
Metallic
□ 22330

RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 33






*Useful area: 12,6x6,3mm.



Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 33121
	■ 33122
	▩ 33119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
☐ 33440




Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15




End Cap
☐ 33621
■ 33622
▩ 33623

CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

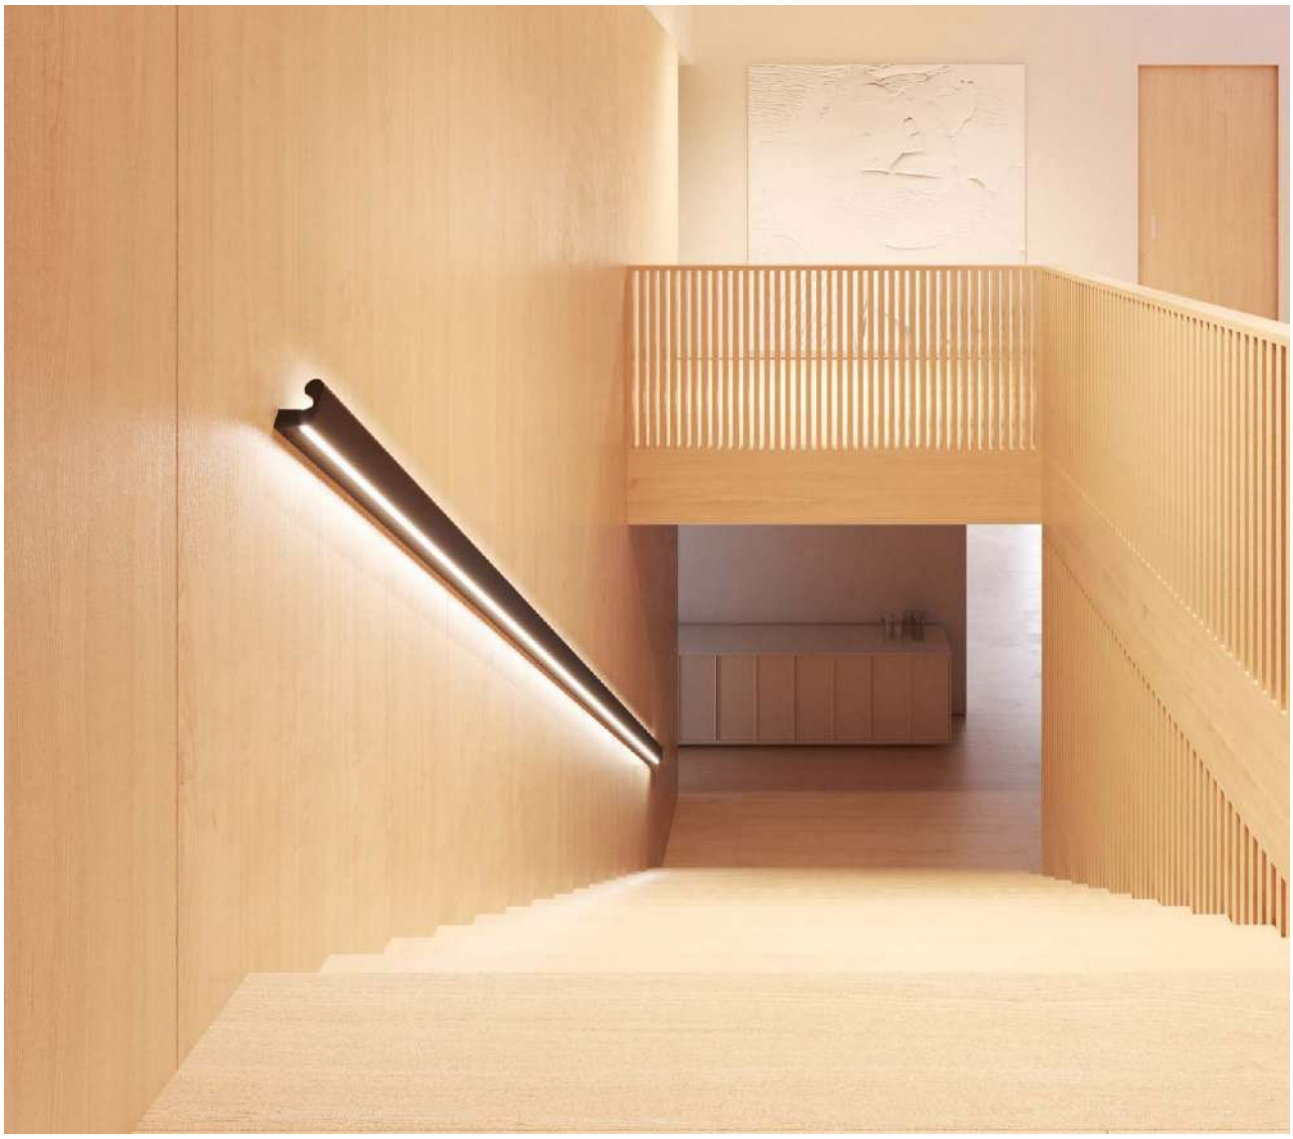


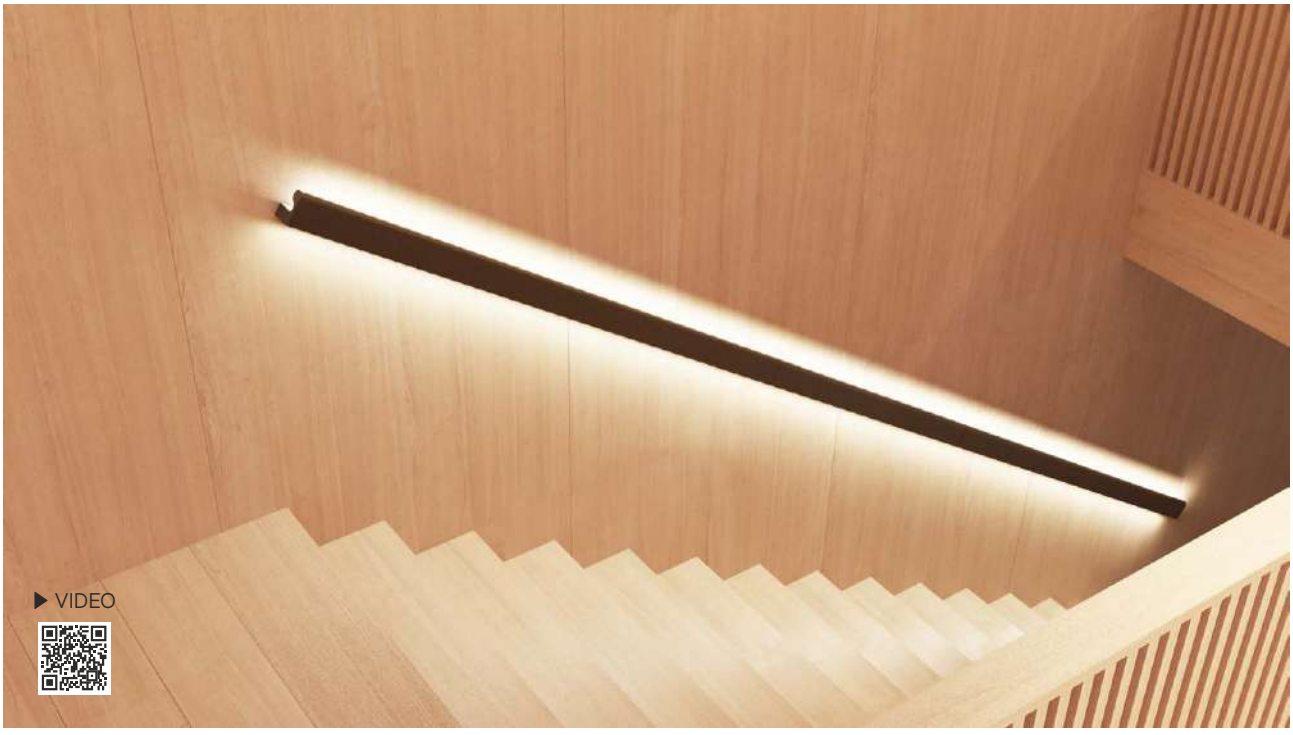
▶ VIDEO


Box 98 railing







Compatible led strips.



*Useful area: 10x2mm.

Technical Information

Max. power	30W/m
Installation	Surface / railing
Material	Aluminium
Finishes	Black / White

Code	
	○ 98121
	● 98122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC (2m)
Opal 70%
□ 98440




End Cap
○ 98621
● 98622


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m | AL 6063

Box 21







*Useful area: 12x3mm.

Compatible led strips.

Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Aluminium

Code	☐ 21121
	☐ 21119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
◯ 20469
◯ 20469-15



End Cap
☐ 21631
☐ 21633



End Cap
☐ 21621
☐ 21623


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 27








*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 27121
	■ 27122
	▩ 27119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15




End Cap left
☐ 27631
■ 27632
▩ 27633




End Cap right
☐ 27621
■ 27622
▩ 27623

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

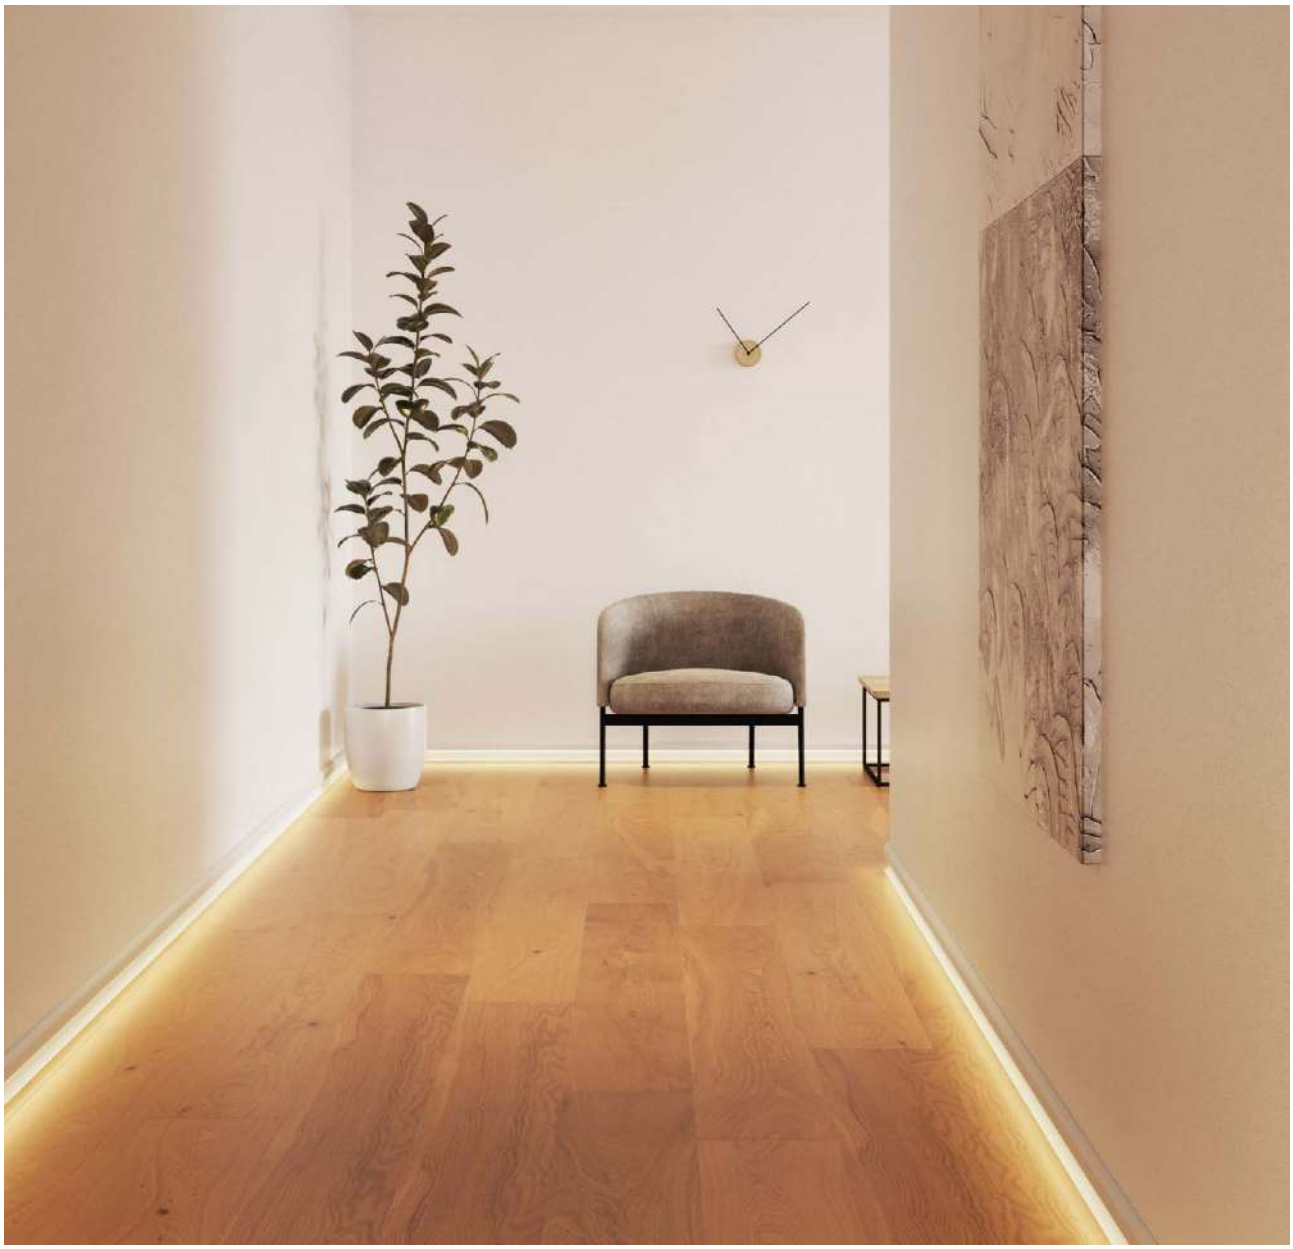

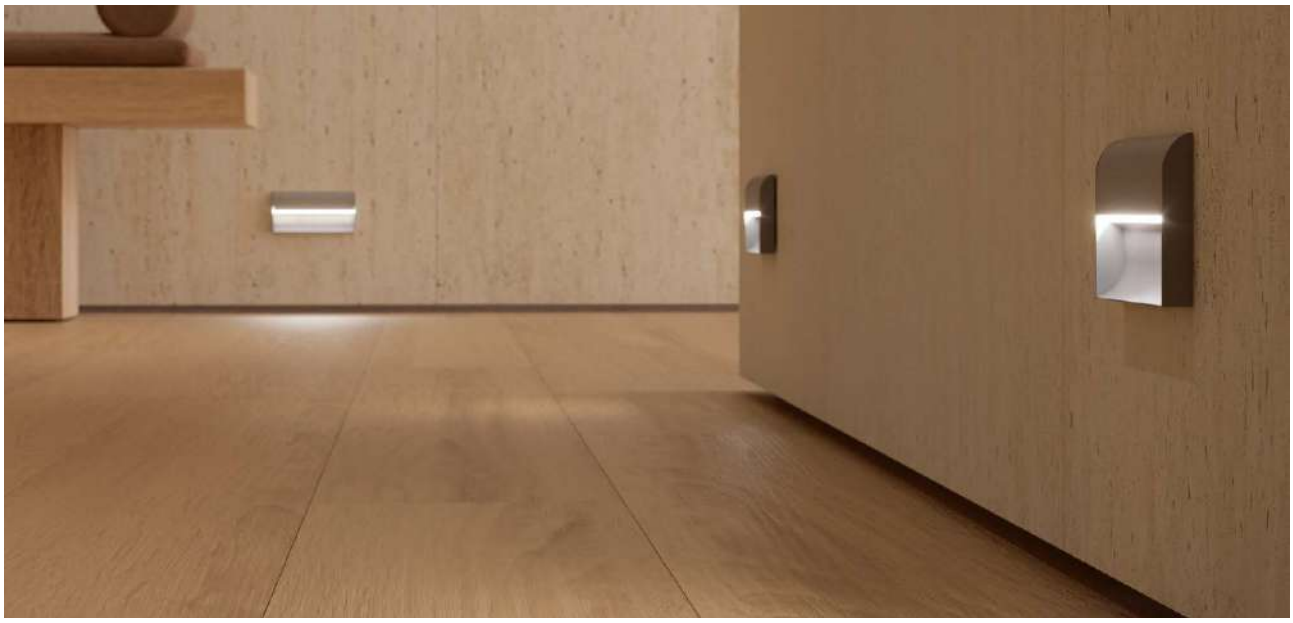


Box 65



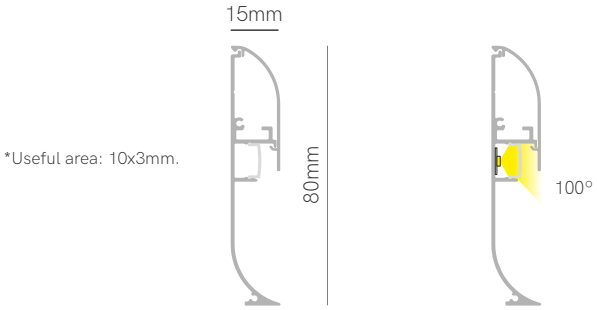

Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / skirting
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 65121
	■ 65122
	▩ 65119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 65440



End Cap x2
☐ 65621
■ 65622
▩ 65623



90° outside connector
☐ 65221
■ 65222
▩ 65223




90° inside connector
☐ 65331
■ 65332
▩ 65333

Joint 180° Metallic
▩ 65550


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

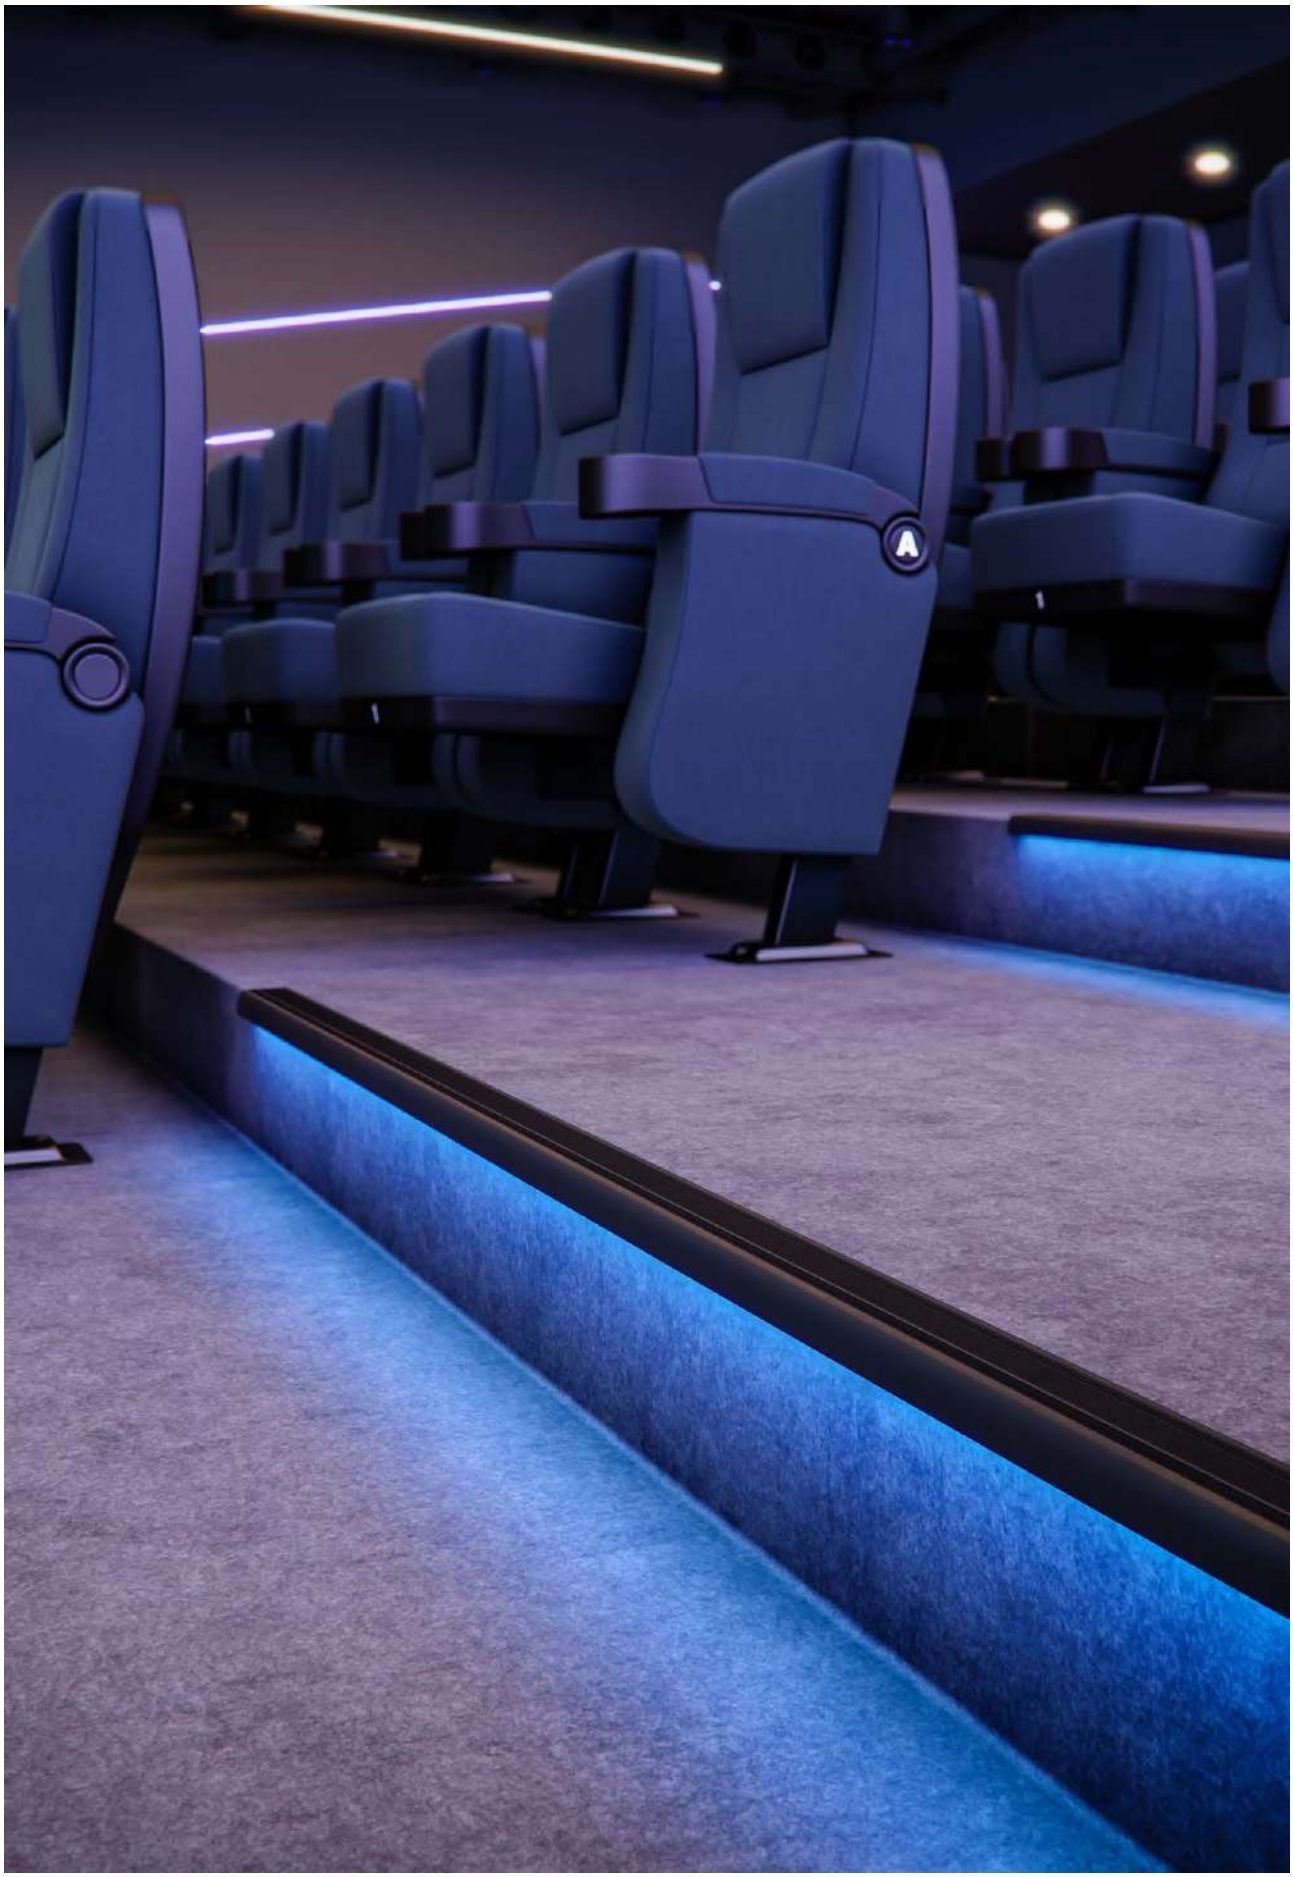


Box 67



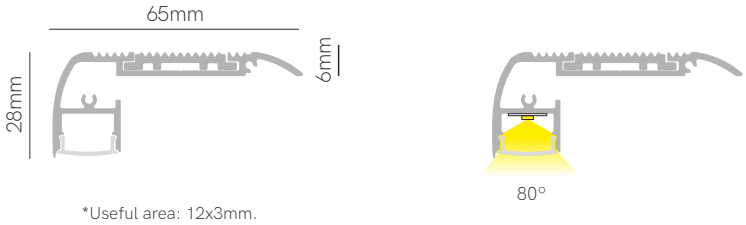

*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / stairs
Material	Aluminium
Finishes	Black

Code	■ 67122

Accessories

Diffuser PC Opal 70%
□ 67440



End Cap
■ 67632




PVC anti-skid cover
■ 67452

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 39







Opal 90°
Transparent 105°



Optic 30°

*Useful area: 12x8mm.

Compatible led strips.

Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	Black

Code	
	● 39122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
○ 39440

Diffuser PC
Transp. 90%
○ 39450

Diffuser PC
Optic 30%
□ 39430



End Cap
● 39622



Clip
Plastic
○ 25530



Suspension Kit
○ 25887 (2m)




Base 455x47x28mm
□ 35331 (30W/24V) ■ 35332 (30W/24V)
□ 35361 (60W/24V) ■ 35362 (60W/24V)
□ 35311 (100W/24V) ■ 35312 (100W/24V)

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 28








*Useful area: 12x5mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Surface
Material	Aluminium
Finishes	Aluminium

Code	○ 28119

Accessories



Diffuser PC
Optic 30%
○ 28430



End Cap
○ 28633



End Cap
○ 28623



Clip
Metallic
□ 28330

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063





Box 29








*Useful area: 12x18mm.

Compatible led strips.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	Aluminium

Code	☐ 29119

Accessories

Diffuser PC
Opal 70%
☐ 29480




End Cap
☐ 29623


CE RoHS

3 YEARS WARRANTY | IP 55 | IK10 | 1000kg | 2m Max | AL 6063

Box 73







*Useful area: 12x7mm.

Compatible led strips.

Technical Information

Max. power	22W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium

Code	
	☐ 73121
	■ 73122
	▩ 73119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 73440



End Cap
☐ 73621
■ 73622
▩ 73623




End Cap
☐ 73631
■ 73632
▩ 73633

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


Box 30 12mm







Box 30 20mm







Compatible led strips.



Technical Information


Max. power	20W/m	40W/m
Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	Aluminium	Aluminium
Code	☐ 30129	☐ 30209

ⓘ Consult delivery terms and conditions.

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



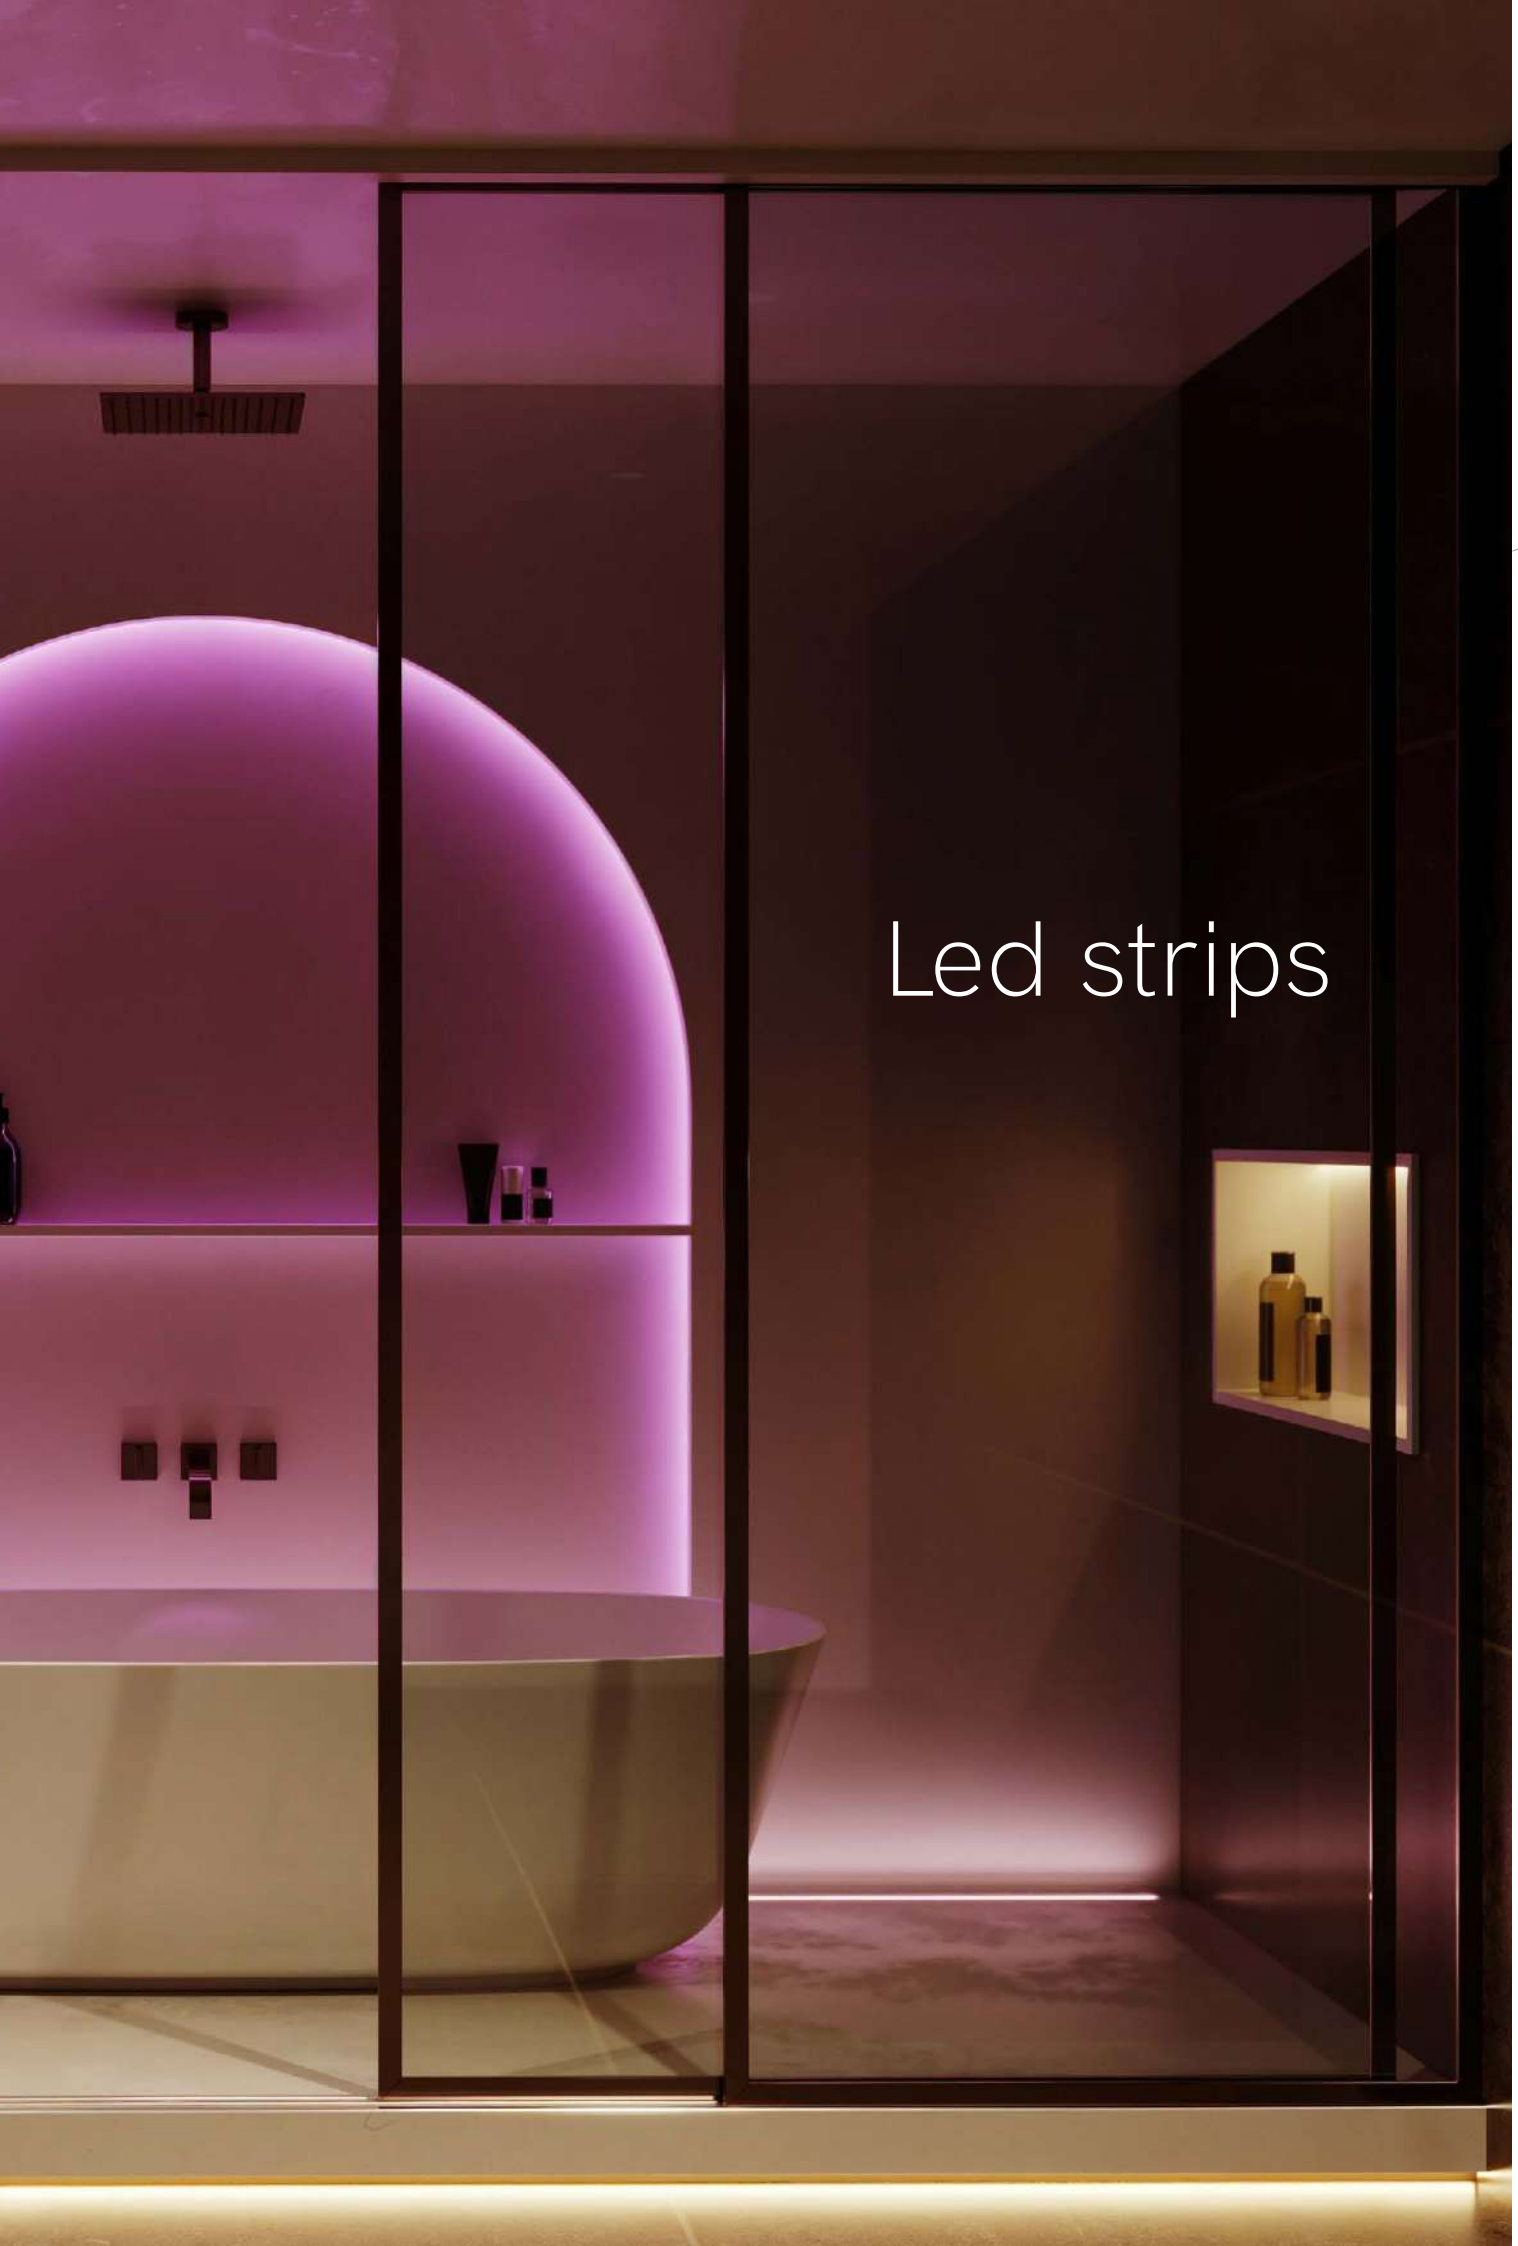

Led strips

	Model	Page	Power	Width	CCT
	FINE 64	216	2,5W/m	10mm	2700K 3000K 4000K
	FINE 48	217	5W/m	10mm	2200K 2700K 3000K 4000K
NEW	FINE 97	219	10W/m	10mm	2200K
	FINE 84	220	4,8W/m	10mm	2700K 3000K 4000K 6000K
	FINE 69	221	9,6W/m	10mm	2200K 2700K 3000K 4000K 6000K
	FINE 41	222	14,4W/m	10mm	2700K 3000K 4000K 6000K
	FINE 31	223	12W/m	10mm	2200K 2700K 3000K 4000K
NEW	FINE 92	224	10W/m	8mm	2700K 3000K 4000K
NEW	FINE 82	225	15W/m	8mm	2700K 3000K 4000K
NEW	FINE 68	226	19,2W/m	10mm	2700K 3000K 4000K
NEW	FINE 79	227	10W/m	8mm	2700K 3000K 4000K
	FINE 61	228	15W/m	10mm	2700K 3000K 4000K 6000K
	FINE 76	229	15W/m	12mm	3000K 4000K
	FINE 52	231	22W/m	10mm	2700K 3000K 4000K 6000K
	FINE 96	233	18W/m	18,5mm	3000K 4000K RGB-W
	FINE 56	234	22W/m	15mm	2700K 3000K 4000K CCT
NEW	FINE 30	235	30W/m	20mm	2700K 3000K 4000K
	FINE 51	237	9,6W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 75	238	7W/m	12mm	2700K 3000K 4000K
	FINE 32 N	239	15W/m	12mm	2700K 3000K 4000K 6000K
NEW	FINE 88	240	12W/m	5mm	2200K 2700K 3000K 4000K
	FINE 49	241	10W/m	4mm	2700K 3000K 4000K 6000K
	FINE 55	242	24W/m	20mm	2700K 3000K 4000K
NEW	FINE 37	243	14,4W/m	10mm	2700K 3000K 4000K
	FINE 44	245	14,4W/m	10mm	MEAT FISH FRUIT BREAD


Lumens	CRI	Density	Voltage	IP20	IP65	IP67
110-120 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
110-135 Lm/W	≥90 CRI	160 LED/m	24 VDC		-	-
140 Lm/W	-	160 LED/m	24 VDC		-	-
95-102 Lm/W	≥90 CRI	70 LED/m	24 VDC			-
87-102 Lm/W	≥90 CRI	140 LED/m	24 VDC			-
92-102 Lm/W	≥90 CRI	140 LED/m	24 VDC			-
85-100 Lm/W	≥90 CRI	512 LED/m	24 VDC		-	
80-90 Lm/W	≥97 CRI	320 LED/m	24 VDC		-	-
65-70 Lm/W	≥90 CRI	480 LED/m	24 VDC		-	-
130-140 Lm/W	≥90 CRI	200 LED/m	24 VDC		-	-
170-180 Lm/W	≥80 CRI	160 LED/m	24 VDC			-
110-125 Lm/W	≥90 CRI	160 LED/m	24 VDC			-
120-128 Lm/W	≥80 CRI	126 LED/m	24 VDC		-	-
97-112 Lm/W	≥90 CRI	238 LED/m	24 VDC			
67,5-120 Lm/W	≥90 CRI	48 LED/m	24 VDC	-		
130-170 Lm/W	≥80 CRI	160 LED/m	24 VDC		-	-
150-160 Lm/W	≥90 CRI	352 LED/m	24 VDC		-	-
100 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	
100-110 Lm/W	≥80 CRI	120 LED/m	220/240 VDC	-		-
100-110 Lm/W	≥80 CRI	112 LED/m	220/240 VDC	-		-
90-110 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
71-77 Lm/W	≥90 CRI	204 LED/m	24 VDC		-	-
80-86 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	-
126-140 Lm/W	≥90 CRI	160 LED/m	48 VDC		-	-
85-95 Lm/W	75/97 CRI	140 LED/m	24 VDC		-	-


	Model	Page	Power	Width	CCT
	FINE 63	247	19W/m	10mm	CCT
	FINE 36	248	12W/m	10mm	CCT
	FINE 42	249	19,2W/m	10mm	CCT
	FINE 54	251	14W/m	10mm	RGB
	FINE 46	253	14,4W/m	10mm	RGB
	FINE 43	254	19,2W/m	12mm	RGB
	FINE 50	255	9,6W/m	5mm	RGB
NEW	FINE 60	257	8W/m	12mm	RGB
NEW	FINE 66 N	259	20W/m	12mm	RGB-W
	FINE 71	261	21W/m	12mm	RGB WW
	FINE 47	262	14,4W/m	12mm	RGB-W
	FINE 45	263	10W/m	10mm	RED GREEN BLUE
	FINE RUNNING	265	12W/m	10mm	3000K 4000K
	FINE SPI-2	267	14W/m	10mm	RGB
	FINE SPI-3	269	11W/m	10mm	RGB-W
	FINE SPI-4	271	20W/m	Ø25mm	RGB
	FINE DMX-4	273	12W/m	12mm	RGB
	FINE DMX-5	275	17W/m	12mm	RGB-W
	FINE 25	279	20W/m	Ø25mm	2400K 2700K 3000K 4000K CCT RGB
NEW	FINE 34	281	5W/m	6mm	2700K 3000K 4000K
NEW	FINE 77	283	8W/m	19mm	2700K 3000K 4000K RGB
	FINE 70	285	5W/m	12,8mm	2700K 3000K 4000K RGB
	FINE 72	287	10W/m	16mm	2700K 3000K 4000K RGB
	FINE 74	289	10W/m	24mm	2700K 3000K 4000K RGB

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
89-95 Lm/W	≥90 CRI	640 LED/m	24 VDC		-	
100 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
90 Lm/W	≥90 CRI	168 LED/m	24 VDC			-
45-50 Lm/W	-	120 LED/m	24 VDC		-	
38-41 Lm/W	-	144 LED/m	24 VDC			-
90 Lm/W	-	240 LED/m	24 VDC		-	-
58 Lm/W	-	120 LED/m	24 VDC		-	-
81 Lm/W	-	60 LED/m	24 VDC		-	-
167 Lm/W	-	840 LED/m	24 VDC		-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
18-60 Lm/W	-	60 LED/m	24 VDC		-	-
15-91 Lm/W	-	480 LED/m	24 VDC		-	
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
42 Lm/W	-	70 LED/m	24 VDC		-	
50 Lm/W	-	70 LED/m	24 VDC		-	
41-73 Lm/W	≥90 CRI	240-480 LED/m	24 VDC	-	-	
28-32 Lm/W	≥90 CRI	196 LED/m	24 VDC	-	-	
26-55 Lm/W	≥90 CRI	120 LED/m	24 VDC	-	-	
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	

Fine 64



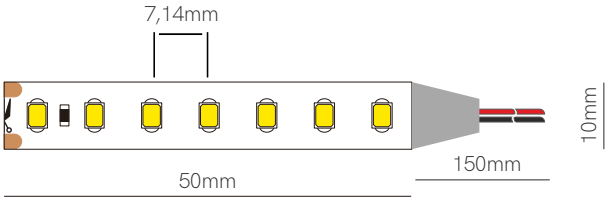



Compatible profiles.

Technical Information

V / A / W	24V / 0,1A / 2,5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	64270	110 lm/w	275 lm/m	2700K	IP20
	64300	115 lm/w	287 lm/m	3000K	IP20
	64400	120 lm/w	300 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 10 meters.


Accessories pages 294-311.


RoHS

5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835


Fine 48



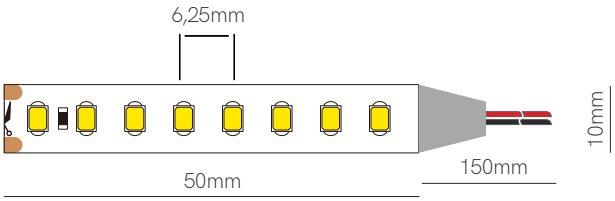



Compatible profiles.



Technical Information

V / A / W	24V / 0,2A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20
	48225 New	110 lm/w	550 lm/m	2200K	IP65
	48275 New	120 lm/w	600 lm/m	2700K	IP65
	48305 New	130 lm/w	650 lm/m	3000K	IP65
	48405 New	135 lm/w	675 lm/m	4000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125



Joint
15,4x11,5x5,7mm
20991




Joint
21,6x11,5x5,7mm
20999


*Available in reel of 10 meters. Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 5 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835


+24V
BENETTO FAURE

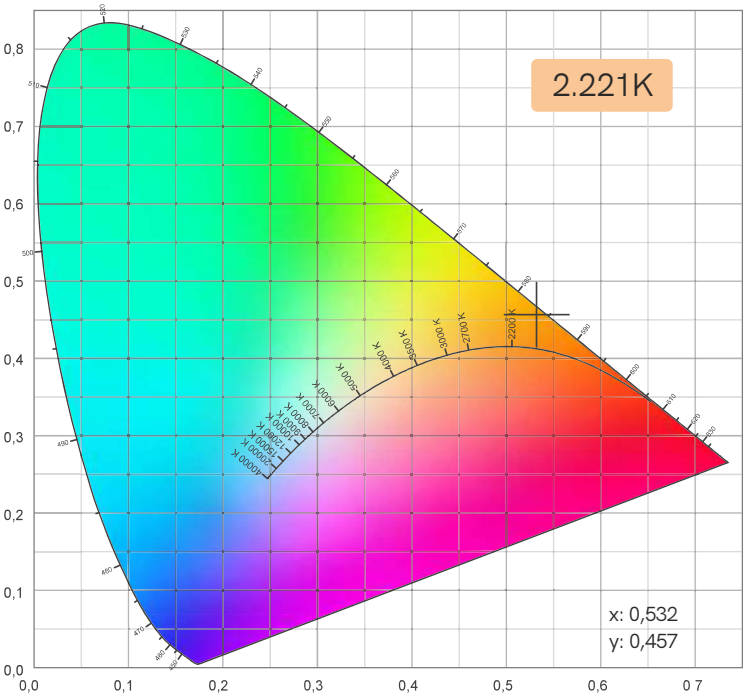
2.221K
x: 0,532
y: 0,457
0,0
0,1
0,2
0,3
0,4
0,5
0,6
0,7
0,8

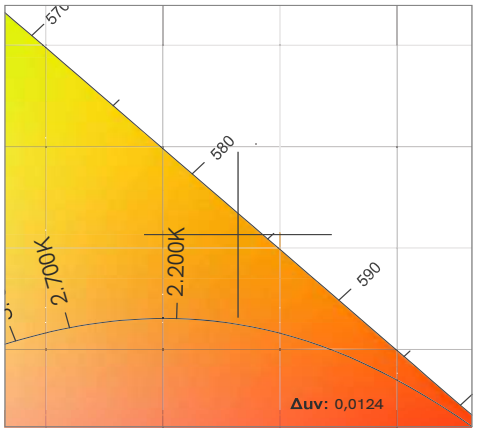

570
580
590
2.700K
2.200K
Δuv: 0,0124

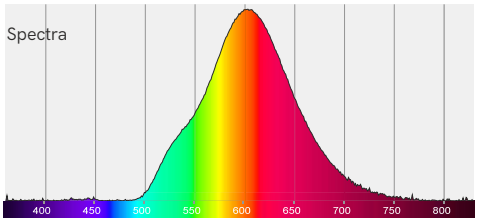

Spectra
400
450
500
550
600
650
700
750
800

New


Fine 97



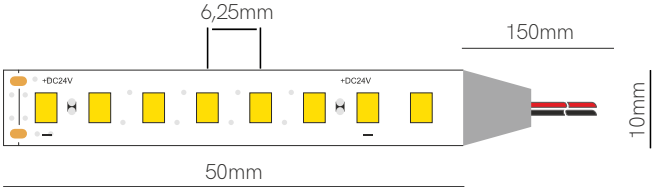



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	97220	140 lm/w	1.400 lm/m	2200K	IP20

Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999


*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 160 LED/m | 24 VDC | 50mm | 2835


Fine 84



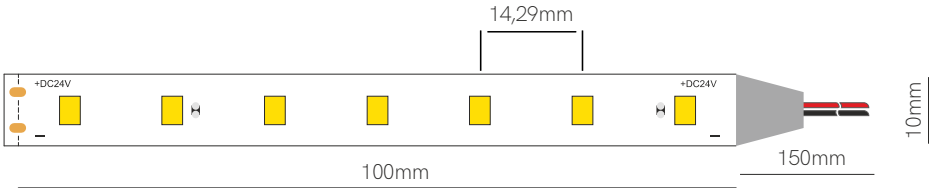



Compatible profiles.



Technical Information

V / A / W	24V / 0,2A / 4,8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	84270	95 lm/w	456 lm/m	2700K	IP20
	84300	98 lm/w	470 lm/m	3000K	IP20
	84400	100 lm/w	480 lm/m	4000K	IP20
	84600	102 lm/w	489 lm/m	6000K	IP20
	84275	90 lm/w	432 lm/m	2700K	IP65
	84305	92 lm/w	441 lm/m	3000K	IP65
	84405	95 lm/w	456 lm/m	4000K	IP65
	84605	97 lm/w	465 lm/m	6000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999


*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 4,8 W/m | 70 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 2835


Fine 69



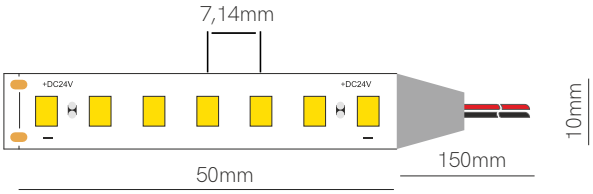



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	69220	87 lm/w	835 lm/m	2200K	IP20
	69270	95 lm/w	912 lm/m	2700K	IP20
	69300	98 lm/w	940 lm/m	3000K	IP20
	69400	100 lm/w	960 lm/m	4000K	IP20
	69600	102 lm/w	979 lm/m	6000K	IP20
	69225	87 lm/w	835 lm/m	2200K	IP65
	69275	90 lm/w	864 lm/m	2700K	IP65
	69305	92 lm/w	883 lm/m	3000K	IP65
	69405	95 lm/w	912 lm/m	4000K	IP65
	69605	97 lm/w	931 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125



Joint
15,4x11,5x5,7mm
□ 20991



Joint
21,6x11,5x5,7mm
□ 20999


*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 9,6 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

Fine 41



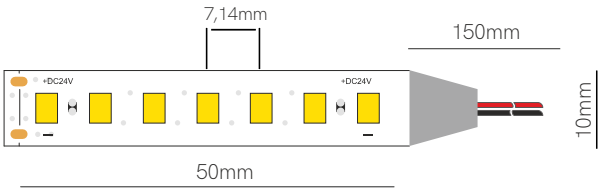



Compatible profiles.

Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	41270	95 lm/w	1.368 lm/m	2700K	IP20
	41300	98 lm/w	1.411 lm/m	3000K	IP20
	41400	100 lm/w	1.440 lm/m	4000K	IP20
	41600	102 lm/w	1.468 lm/m	6000K	IP20
	41275	90 lm/w	1.296 lm/m	2700K	IP65
	41305	92 lm/w	1.324 lm/m	3000K	IP65
	41405	95 lm/w	1.368 lm/m	4000K	IP65
	41605	97 lm/w	1.396 lm/m	6000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999


*Available in reel of 5 or 25 meters. Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835


Fine 31



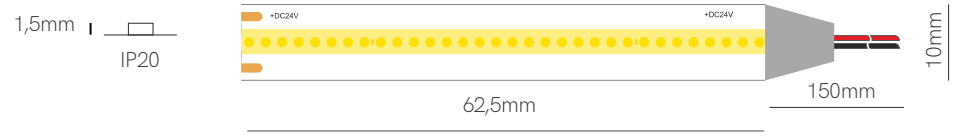

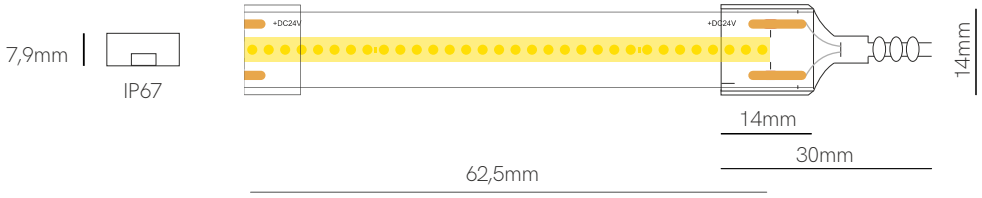

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	31220	85 lm/w	1.020 lm/m	2200K	IP20
	31270	95 lm/w	1.140 lm/m	2700K	IP20
	31300	98 lm/w	1.176 lm/m	3000K	IP20
	31400	100 lm/w	1.200 lm/m	4000K	IP20
	31227	80 lm/w	960 lm/m	2200K	IP67
	31277	90 lm/w	1.080 lm/m	2700K	IP67
	31307	93 lm/w	1.116 lm/m	3000K	IP67
	31407	95 lm/w	1.140 lm/m	4000K	IP67

Accessories



End Cap ☐ 32635
End Cap ☐ 32625
Joint ☐ 31709
Joint ☐ 31809
Joint ☐ 31909


*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 12 W/m | 512 LED/m | CRI ≥90 | III | 24 VDC | 62,5mm | COB

New

Fine 92



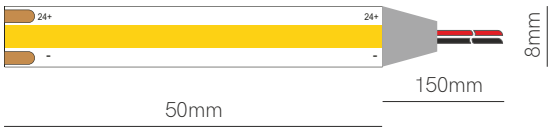



Compatible profiles.

Technical Information

V / A / W	24V / 0,42A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	92270	80 lm/w	800 lm/m	2700K	IP20
	92300	85 lm/w	850 lm/m	3000K	IP20
	92400	90 lm/w	900 lm/m	4000K	IP20

Accessories



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909



L Joint
19x12x5mm
☐ 20C90 New



L Joint
19x19x5mm
☐ 20T90 New

*Available in reel of 10 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 10 W/m | 320 LED/m | CRI ≥97 | 24 VDC | 50mm | COB

New


Fine 82



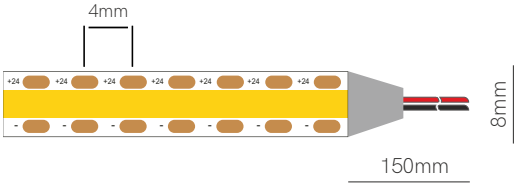



Compatible profiles.



Technical Information

V / A / W	24V / 0,63A / 15W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	82270	65 lm/w	975 lm/m	2700K	IP20
	82300	65 lm/w	975 lm/m	3000K	IP20
	82400	70 lm/w	1.050 lm/m	4000K	IP20

Accessories



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909

*Available in reel of 10 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 15 W/m | 480 LED/m | CRI ≥90 | III | 24 VDC | Free cut | COB

New

Fine 68



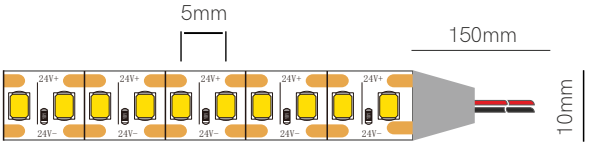



Compatible profiles.

Technical Information

V / A / W	24V / 0,8A / 19,2W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	68270	130 lm/w	2.496 lm/m	2700K	IP20
	68300	135 lm/w	2.592 lm/m	3000K	IP20
	68400	140 lm/w	2.688 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters.

Accessories pages 294-311.


RoHS


5 YEARS WARRANTY | 19,2 W/m | 200 LED/m | CRI ≥90 | III | 24 VDC | Free cut | 2835

New


Fine 79



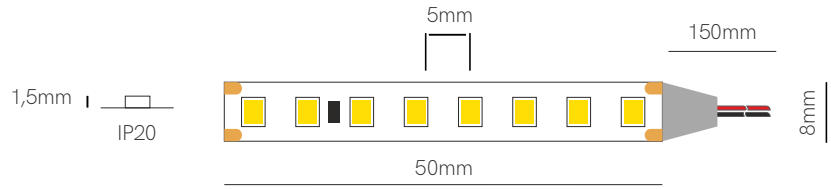

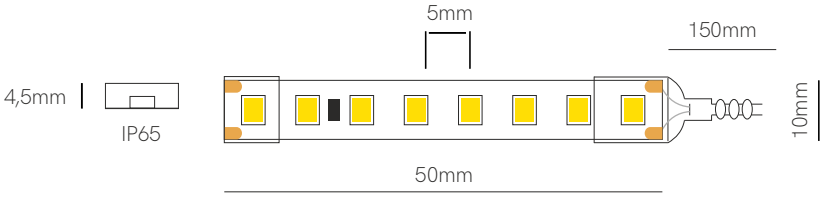

Compatible profiles.



Technical Information

V / A / W	24V / 0,42A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	79270	170 lm/w	1.700 lm/m	2700K	IP20
	79300	175 lm/w	1.750 lm/m	3000K	IP20
	79400	180 lm/w	1.800 lm/m	4000K	IP20
	79275	170 lm/w	1.700 lm/m	2700K	IP65
	79305	175 lm/w	1.750 lm/m	3000K	IP65
	79405	180 lm/w	1.800 lm/m	4000K	IP65

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991




Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50mm | 2835

Fine 61



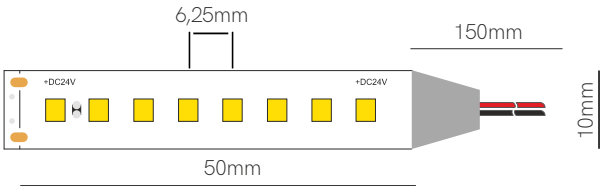



Compatible profiles.

Technical Information

V / A / W	24V / 0,62A / 15W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	61270	110 lm/w	1.650 lm/m	2700K	IP20
	61300	115 lm/w	1.725 lm/m	3000K	IP20
	61400	120 lm/w	1.800 lm/m	4000K	IP20
	61600	125 lm/w	1.875 lm/m	6000K	IP20
	61275	110 lm/w	1.650 lm/m	2700K	IP65
	61305	115 lm/w	1.725 lm/m	3000K	IP65
	61405	120 lm/w	1.800 lm/m	4000K	IP65
	61605	125 lm/w	1.875 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125



Joint
15,4x11,5x5,7mm
□ 20991




Joint
21,6x11,5x5,7mm
□ 20999


*Available in reel of 5 or 25 meters. Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 15 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

Fine 76



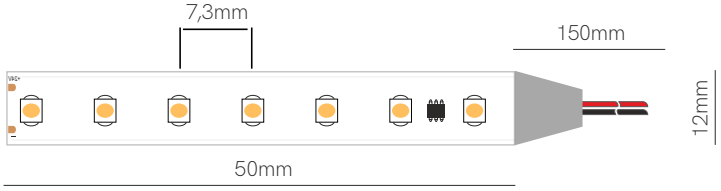






Integrated optics

Compatible profiles.



Technical Information

V / A / W	24V / 0,62A / 15W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	76300	120 lm/w	1.800 lm/m	3000K	IP20
	76400	128 lm/w	1.920 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 15 W/m | 126 LED/m | CRI ≥80 | III | 24 VDC | 50mm | 2835 LENS




Fine 52



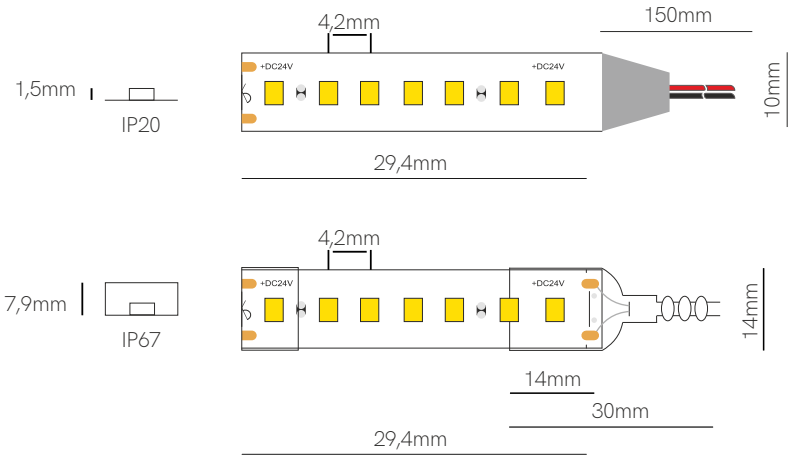

Compatible profiles.



Technical Information

V / A / W	24V / 0,91A / 22W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220




Joint
13,55x11,67x4,7mm
☐ 20120

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 22 W/m | 238 LED/m | CRI ≥90 | III | 24 VDC | 29,4mm | 2835

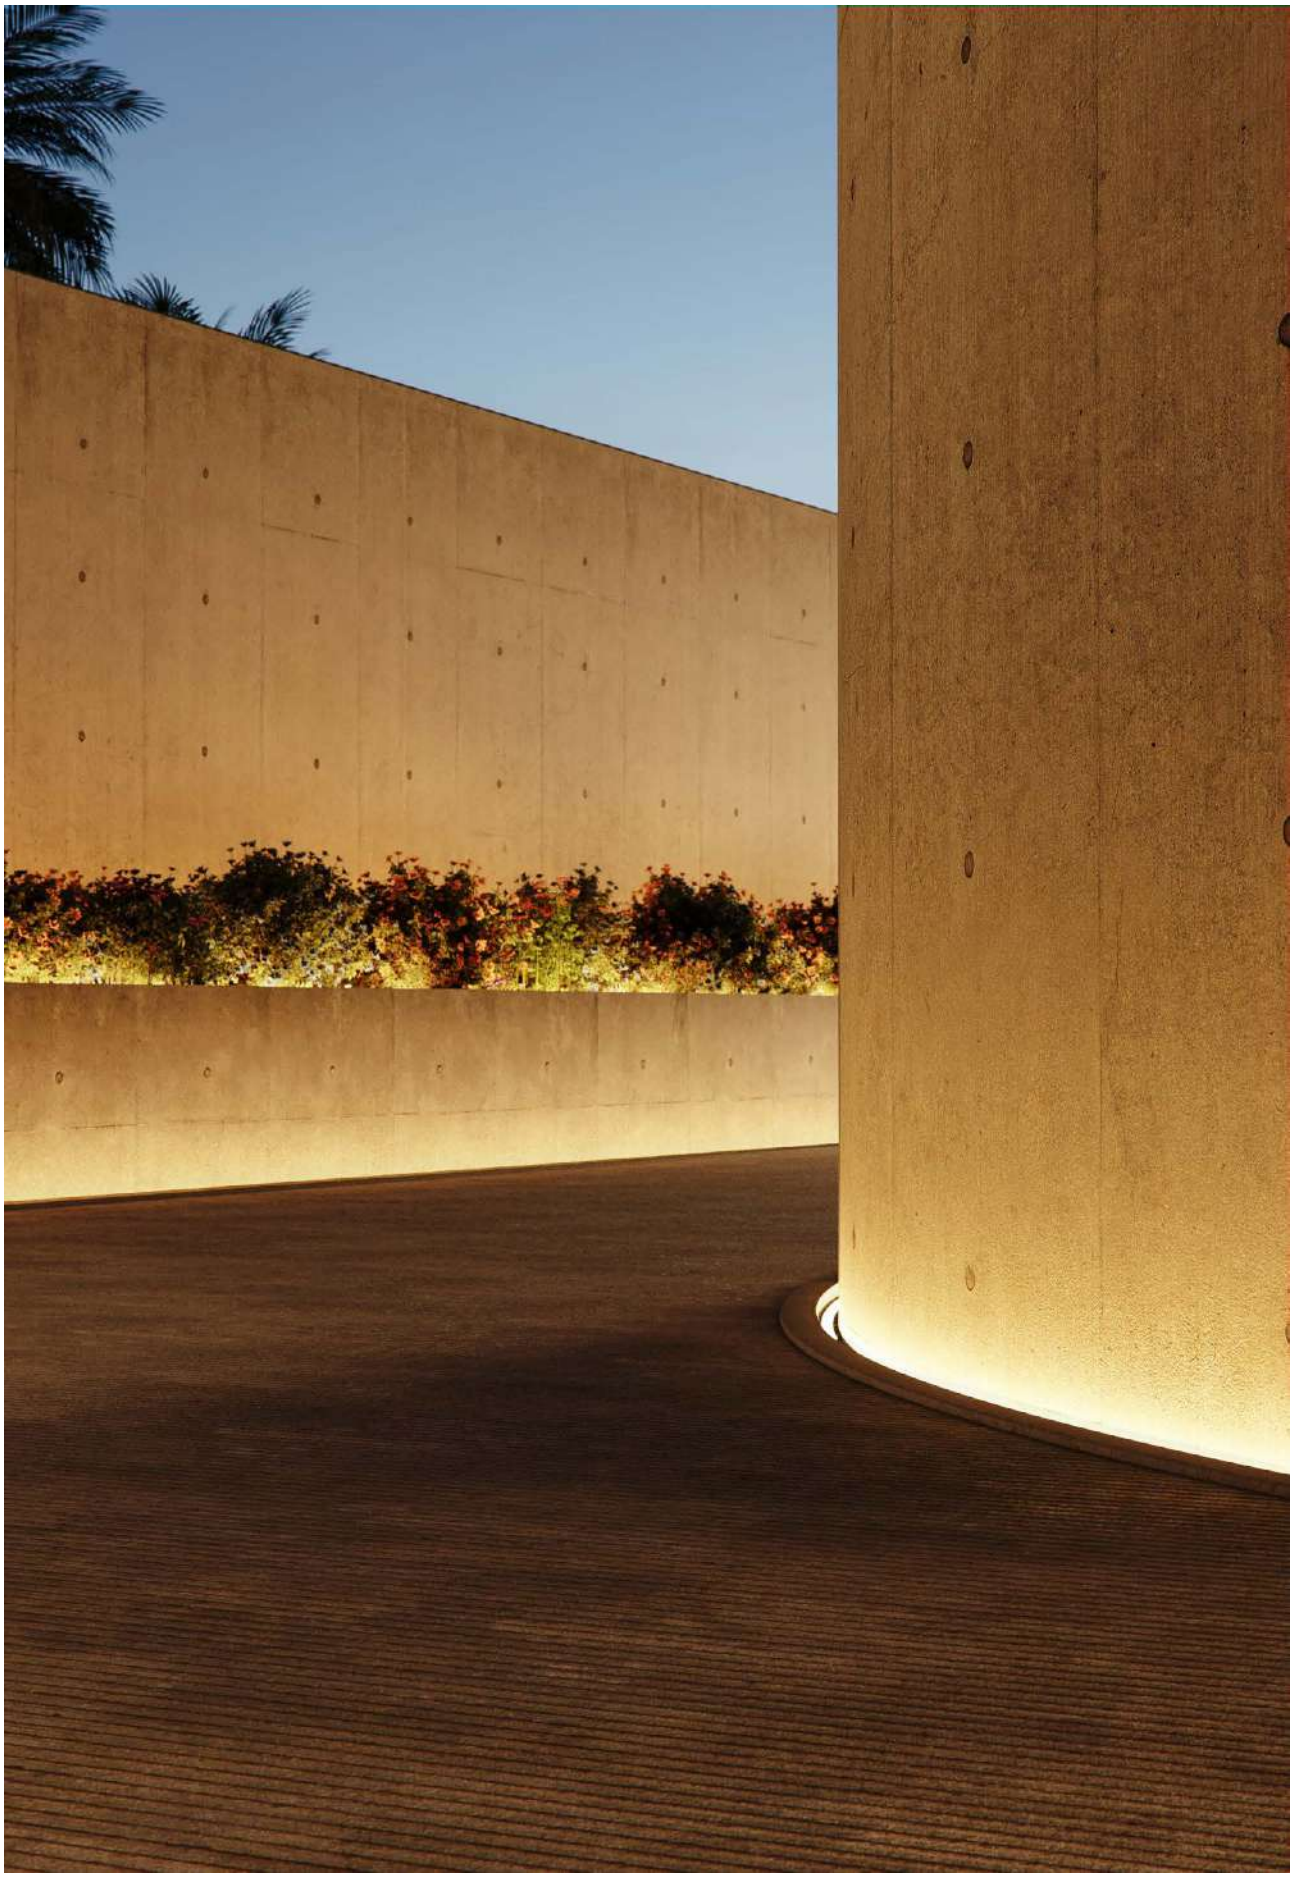


Fine 96



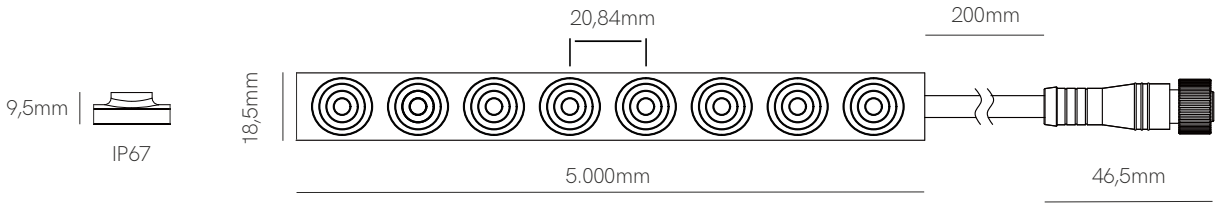



Compatible profiles.



Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 18W/m
V / A / W (RGB-W)	24V / 0,33A / 8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	96307	106 lm/w	1.915 lm/m	3000K	IP67
	96407	120 lm/w	2.167 lm/m	4000K	IP67
	96477	67,5 lm/w	540 lm/m	RGB-W 3.000K	IP67

Accessories



End Cap
☐ 96633

End Cap
☐ 96623



Clip
☐ 96119



Clip
☐ 96380



Clip
☐ 96330



Clip
☐ 96350



ADH
○ 96111



Extension cable
☐ 96946-M2
☐ 96946-M4
☐ 96946-H2
☐ 96946-H4



Extension cable
☐ 96920-2
☐ 96920-4


*Available in reel of 5 meters. Accessories pages 294-311.


CE RoHS

3 YEARS WARRANTY | 18/8 W/m | 48 LED/m | CRI ≥90 | 24 VDC | monocolor 25mm rgb-w 160,5mm | 2835

Fine 56



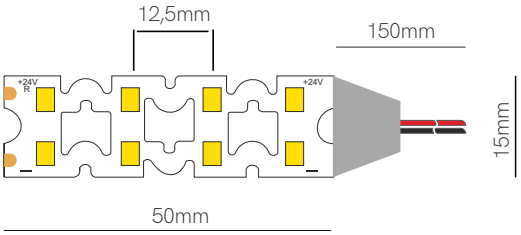



Compatible profiles.

Technical Information

V / A / W	24V / 0,91A / 22W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	56270	155 lm/w	3.410 lm/m	2700K	IP20
	56300	160 lm/w	3.520 lm/m	3000K	IP20
	56400	170 lm/w	3.740 lm/m	4000K	IP20
	56360	130 lm/w	2.860 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50 mm | 2835

New


Fine 30



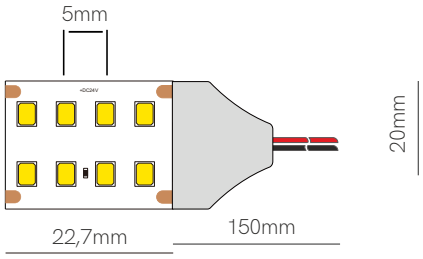



Compatible profiles.



Technical Information

V / A / W	24V / 1,25A / 30W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	30270	150 lm/w	4.500 lm/m	2700K	IP20
	30300	155 lm/w	4.650 lm/m	3000K	IP20
	30400	160 lm/w	4.800 lm/m	4000K	IP20

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 30 W/m | 352 LED/m | CRI ≥90 | 24 VDC | 22,7mm | 2835




Fine 51



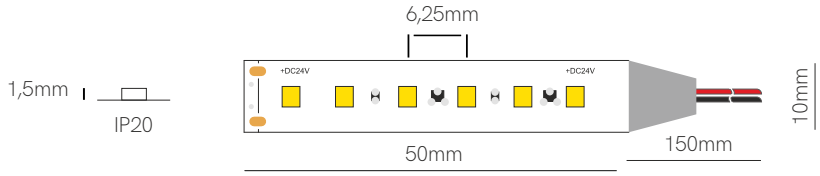

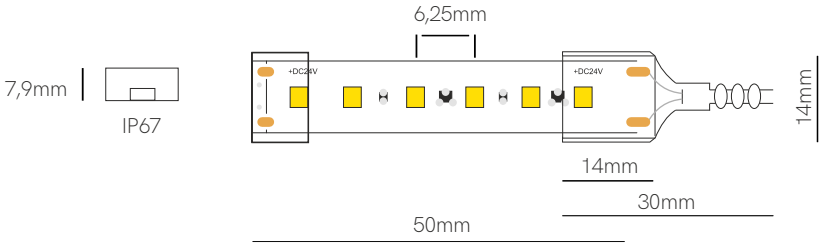

Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 20 meters.


Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | CRI ≥90 | 24 VDC | ULTRALONG | 50mm | 2835

New


Fine 75



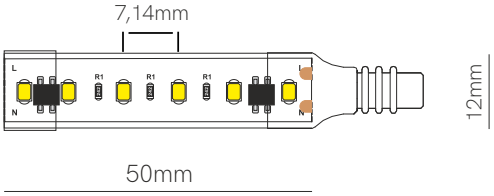



Compatible profiles.



Technical Information

V / A / W	220V / 0,03A / 7W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	75275	100 lm/w	700 lm/m	2700K	IP65
	75305	105 lm/w	735 lm/m	3000K	IP65
	75405	110 lm/w	770 lm/m	4000K	IP65

Accessories

End Cap ☐ 32635

End Cap ☐ 32625



Connector kit ☐ 32699



Join 180° ☐ 32899



Join 90° ☐ 32499



Clip ☐ 32900


Joint ☐ 32299

*Available in reel of 50 meters. Accessories pages 294-311.


CE RoHS | 3 YEARS WARRANTY | 7 W/m | 120 LED/m | CRI ≥80 | 220/240 VAC | 50mm | TRIAC DIMM | 2835

Fine 32 N



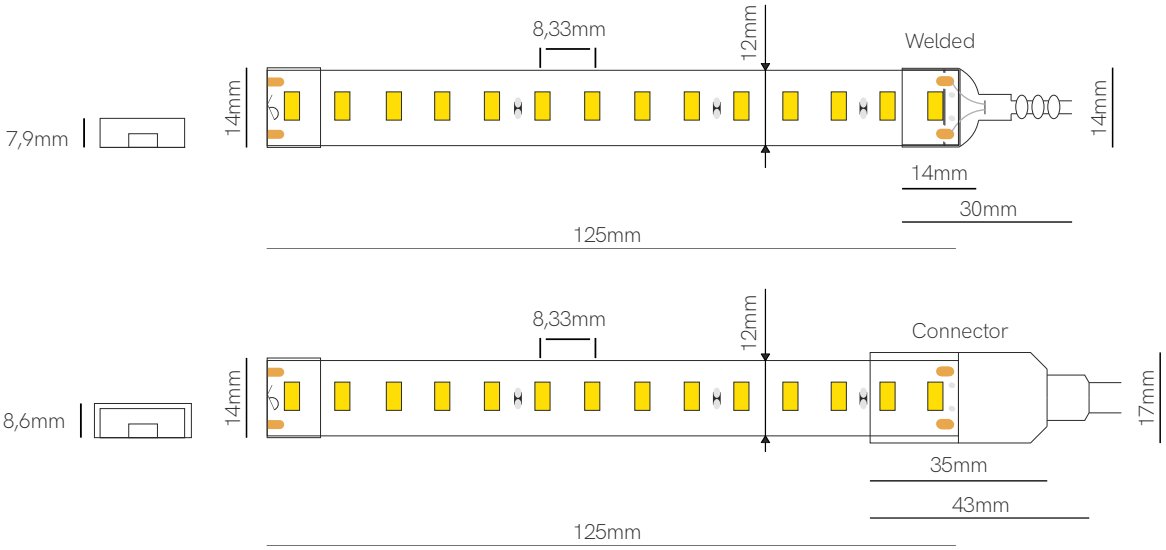

Compatible profiles.



Technical Information

V / A / W	220V / 0,068A / 15W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	32275-N	100 lm/w	1.500 lm/m	2700K	IP65
	32305-N	105 lm/w	1.575 lm/m	3000K	IP65
	32405-N	110 lm/w	1.650 lm/m	4000K	IP65
	32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories



End Cap ☐ 32635
End Cap ☐ 32625
Connector kit ☐ 32699
Join 180° ☐ 32899
Join 90° ☐ 32499
Clip ☐ 32900
Joint ☐ 32299


*Available in reel of 5 or 50 meters. Accessories pages 294-311.


CE RoHS | 3 YEARS WARRANTY | 15 W/m | 112 LED/m | CRI ≥80 | 220/240 VAC | 125mm | TRIAC DIMM 30-100% | 2835

New

Fine 88



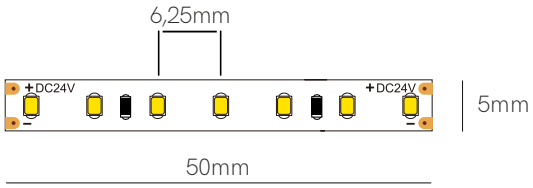



Compatible profiles.

Technical Information

V / A / W	24V / 0,5A / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	88220	90 lm/w	1.080 lm/m	2200K	IP20
	88270	100 lm/w	1.200 lm/m	2700K	IP20
	88300	105 lm/w	1.260 lm/m	3000K	IP20
	88400	110 lm/w	1.320 lm/m	4000K	IP20

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835


Fine 49



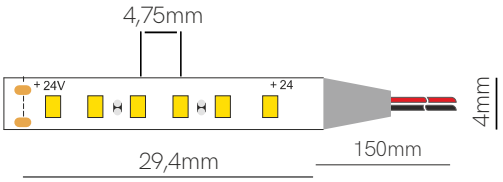



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	49270	71 lm/w	710 lm/m	2700K	IP20
	49300	74 lm/w	740 lm/m	3000K	IP20
	49400	77 lm/w	770 lm/m	4000K	IP20
	49600	74 lm/w	740 lm/m	6000K	IP20

Accessories



Joint
20049



Joint
20249


*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 10 W/m | 204 LED/m | CRI ≥90 | III | 24 VDC | 29,4mm | 2216

Fine 55



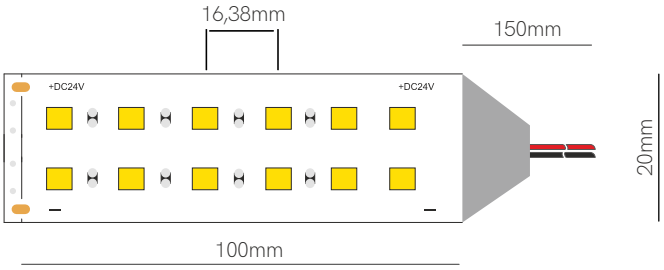



Compatible profiles.

Technical Information

V / A / W	24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	55270	80 lm/w	1.920 lm/m	2700K	IP20
	55300	83 lm/w	1.992 lm/m	3000K	IP20
	55400	86 lm/w	2.064 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 24 W/m | 120 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 5050

New

Fine 37




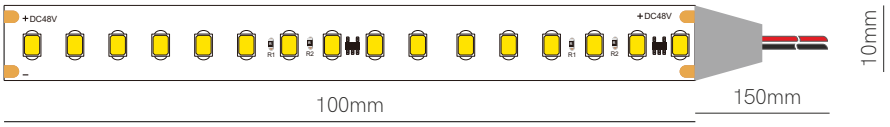

1,5mm

IP20

Compatible profiles.



Technical Information

V / A / W	48V / 0,3A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	37270	126 lm/w	1.815 lm/m	2700K	IP20
	37300	135 lm/w	1.944 lm/m	3000K	IP20
	37400	140 lm/w	2.016 lm/m	4000K	IP20

Power supply 48V (page 366).

Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 25 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 14,4 W/m | 160 LED/m | CRI ≥90 | III | 48 VDC | 100mm | 2835



Fine 44



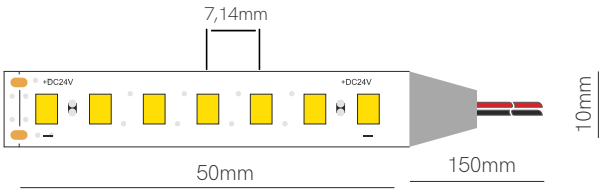





MEAT STRIP


FISH STRIP


FRUIT STRIP


BREAD STRIP

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	44370	85lm/w	1.224 lm/m	MEAT (3.700K)	IP20
	44110	95 lm/w	1.368 lm/m	FISH (11.600K)	IP20
	44500	90 lm/w	1.296 lm/m	FRUIT (5.000K)	IP20
	44270	80 lm/w	1.152 lm/m	BREAD (2.700K)	IP20

Accessories


Joint
13,8x11,55x3,9mm
☐ 20220


Joint
13,55x11,67x4,7mm
☐ 20120


Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI 75/97 | 24 VDC | 50mm | 2835

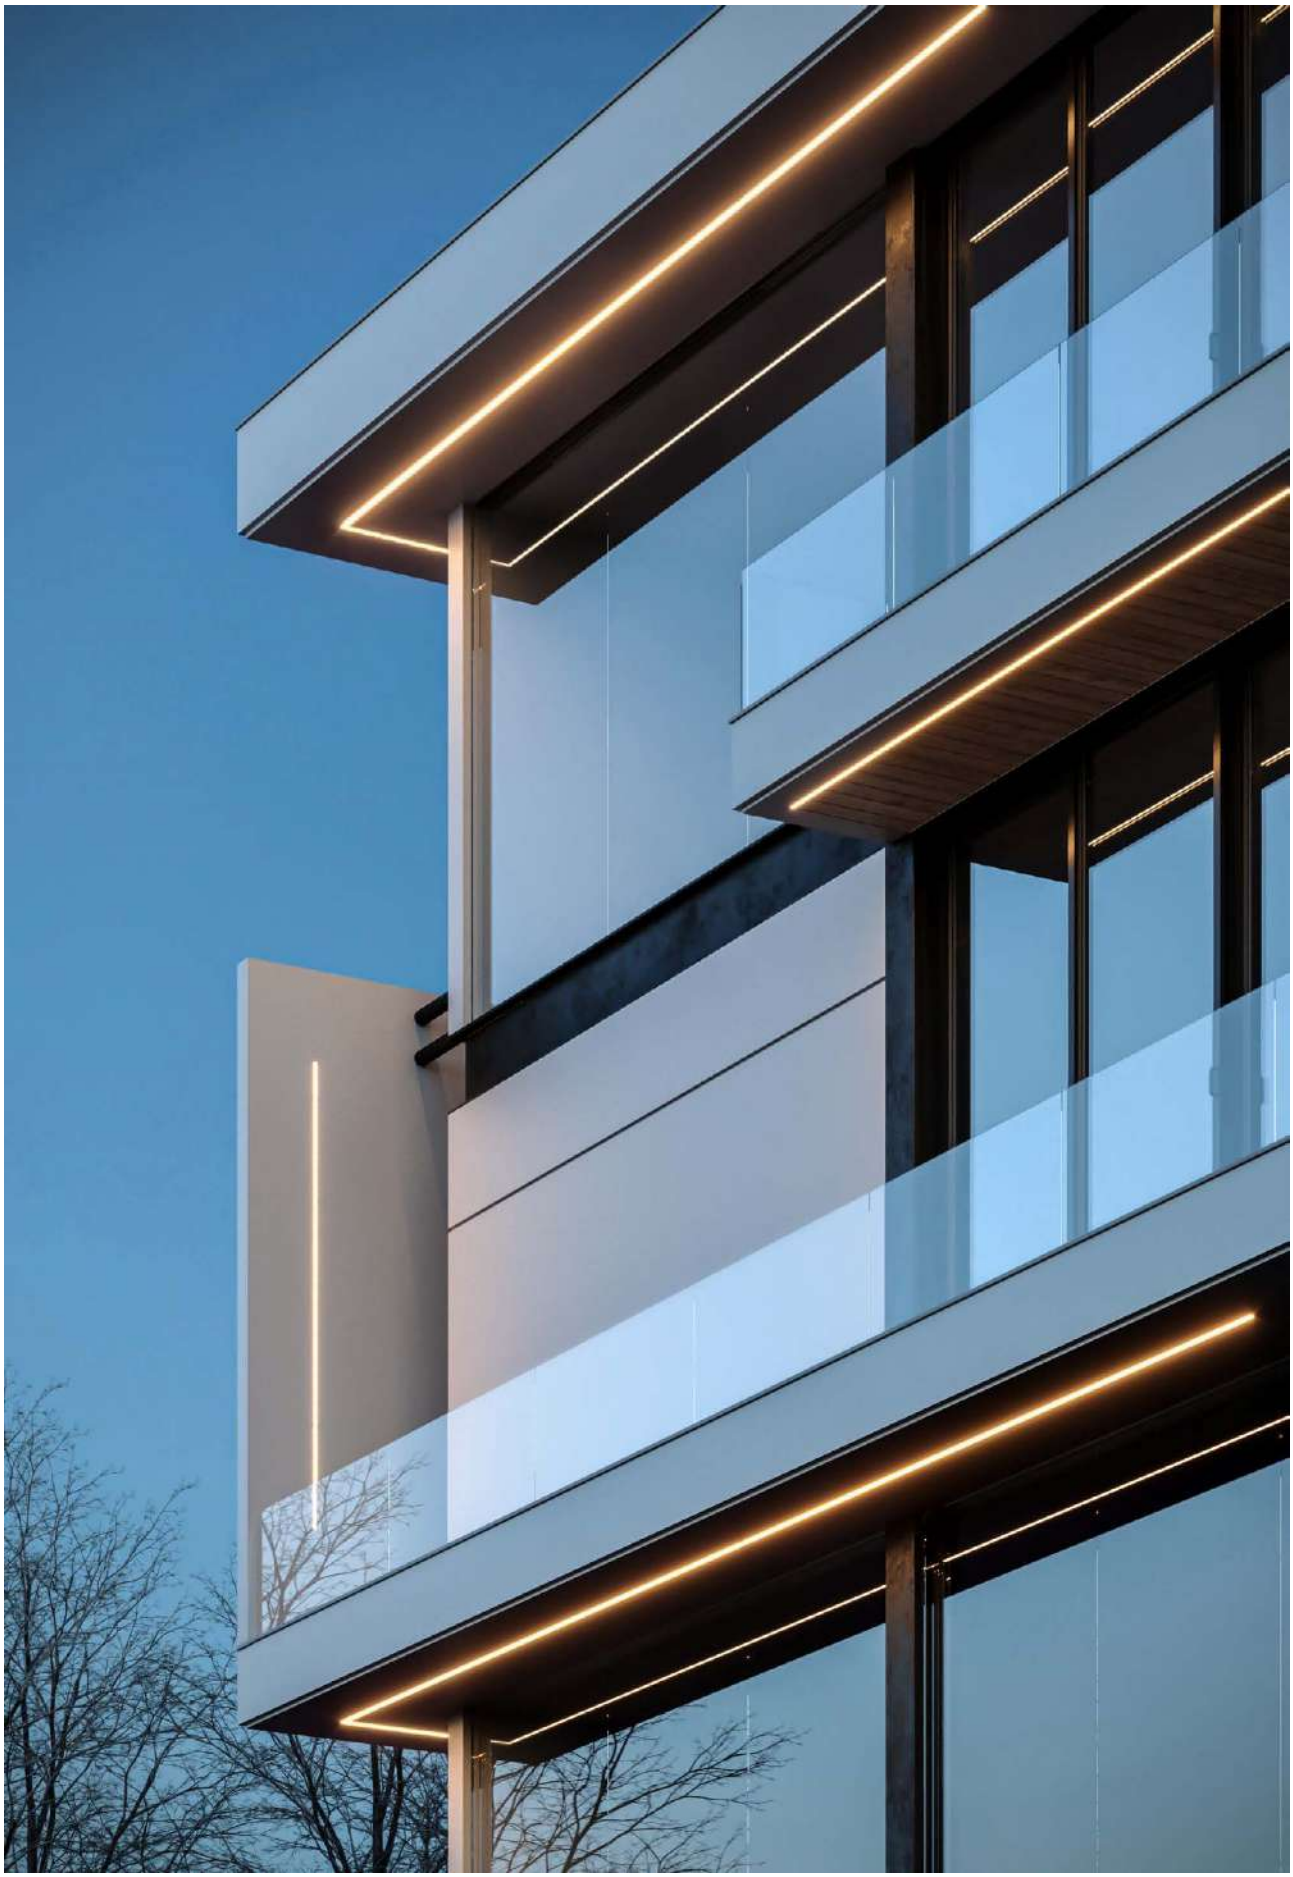


Fine 63



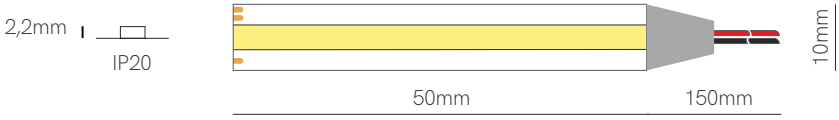

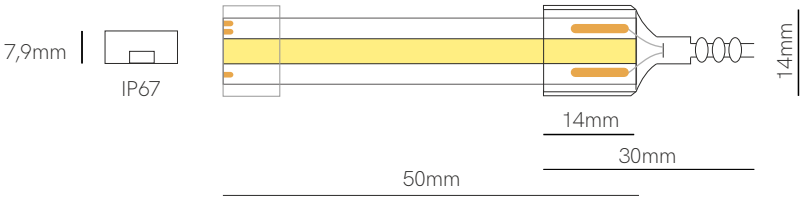

Compatible profiles.



Technical Information

V / A / W	24V / 0,79A / 19W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	63360	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP20
	63367	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 19 W/m | 640 LED/m | CRI ≥90 | III | 24 VDC | 50mm | COB


Fine 36



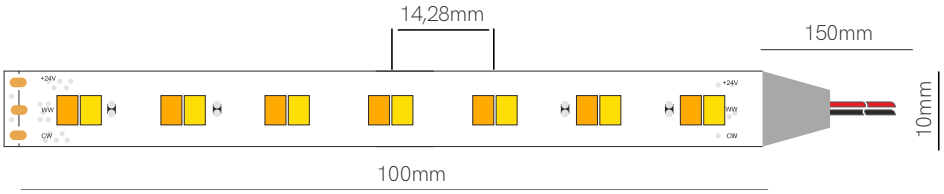



Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	36360	100 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories



Joint
13,57x11,63x3,5mm
☐ 20230



Joint
13,57x11,63x4,7mm
☐ 20130

*Available in reel of 5 meters.


Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 100mm | 2835


Fine 42



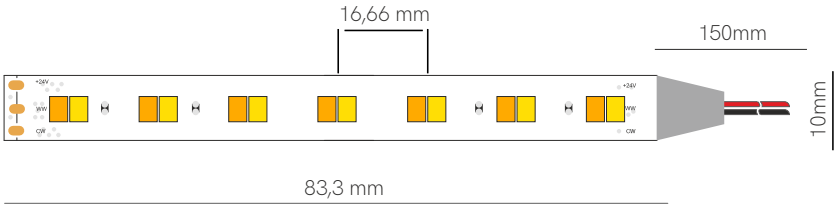



Compatible profiles.



Technical Information

V / A / W	24V / 0,8A / 19,2W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	42360	90 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	90 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135


*Available in reel of 5 or 25 meters. Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 19,2 W/m | 168 LED/m | CRI ≥90 | 24 VDC | 83,3mm | 2835


▶ VIDEO


Fine 54

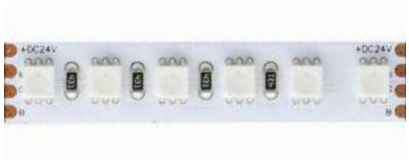

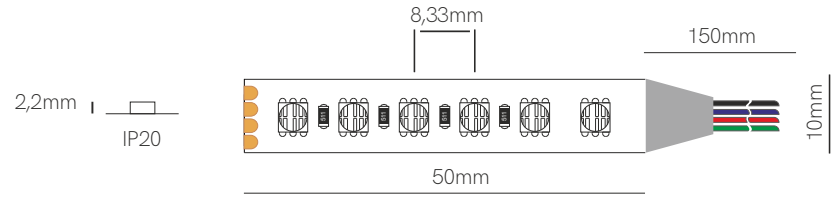

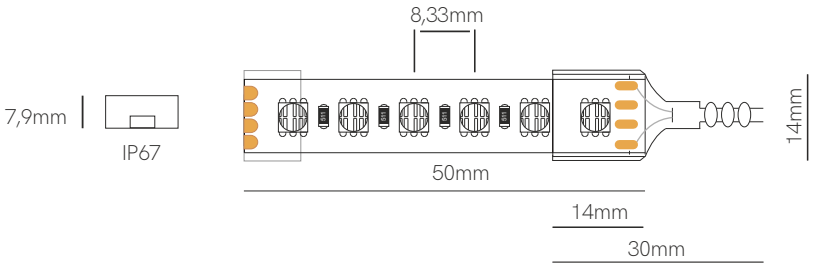

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	54460	50 lm/w	700 lm/m	RGB	IP20
	54467	45 lm/w	630 lm/m	RGB	IP67

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | III | 50mm | 4040




Fine 46



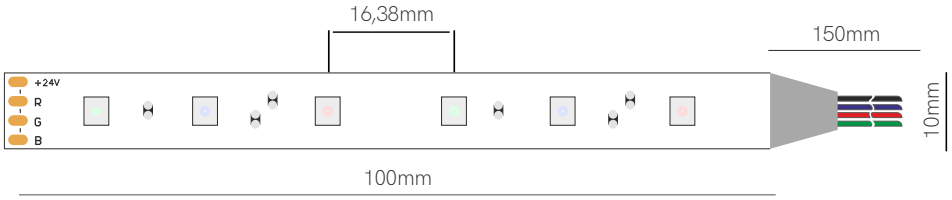



Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,54x11,7x4,1mm
□ 20240



Joint
13,56x13,46x4,7mm
□ 20140



Joint
24,3x14,6x7,68mm
□ 20245




Joint
24,3x14,6x7,68mm
□ 20145


*Available in reel of 5 or 25 meters. Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | III | 50mm | 5050

Fine 43



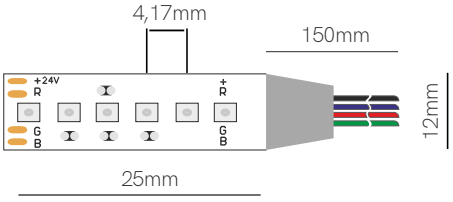



Compatible profiles.

Technical Information

V / A / W	24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	90 lm/w	1.728 lm/m	RGB	IP20

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS

3 YEARS WARRANTY | 19,2 W/m | 240 LED/m | 24 VDC | 25mm | 3535


Fine 50



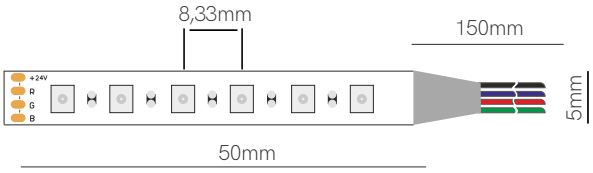



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m	RGB	IP20

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS


3 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC | 50mm | 2835




New


Fine 60



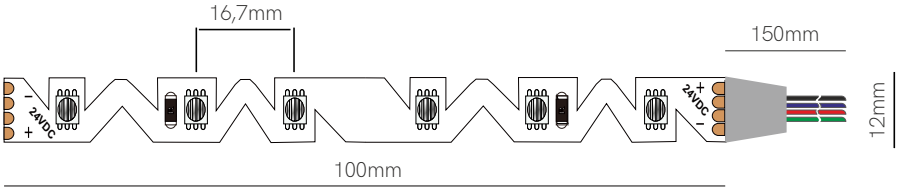



Compatible profiles.



Technical Information

V / A / W	24V / 0,33A / 8W/m


	Code	Lumens/w	Lumens/m	CCT	IP
Code	60460	81 lm/w	648 lm/m	RGB	IP20

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS


5 YEARS WARRANTY | 8 W/m | 60 LED/m | 24 VDC | 100mm | 5050

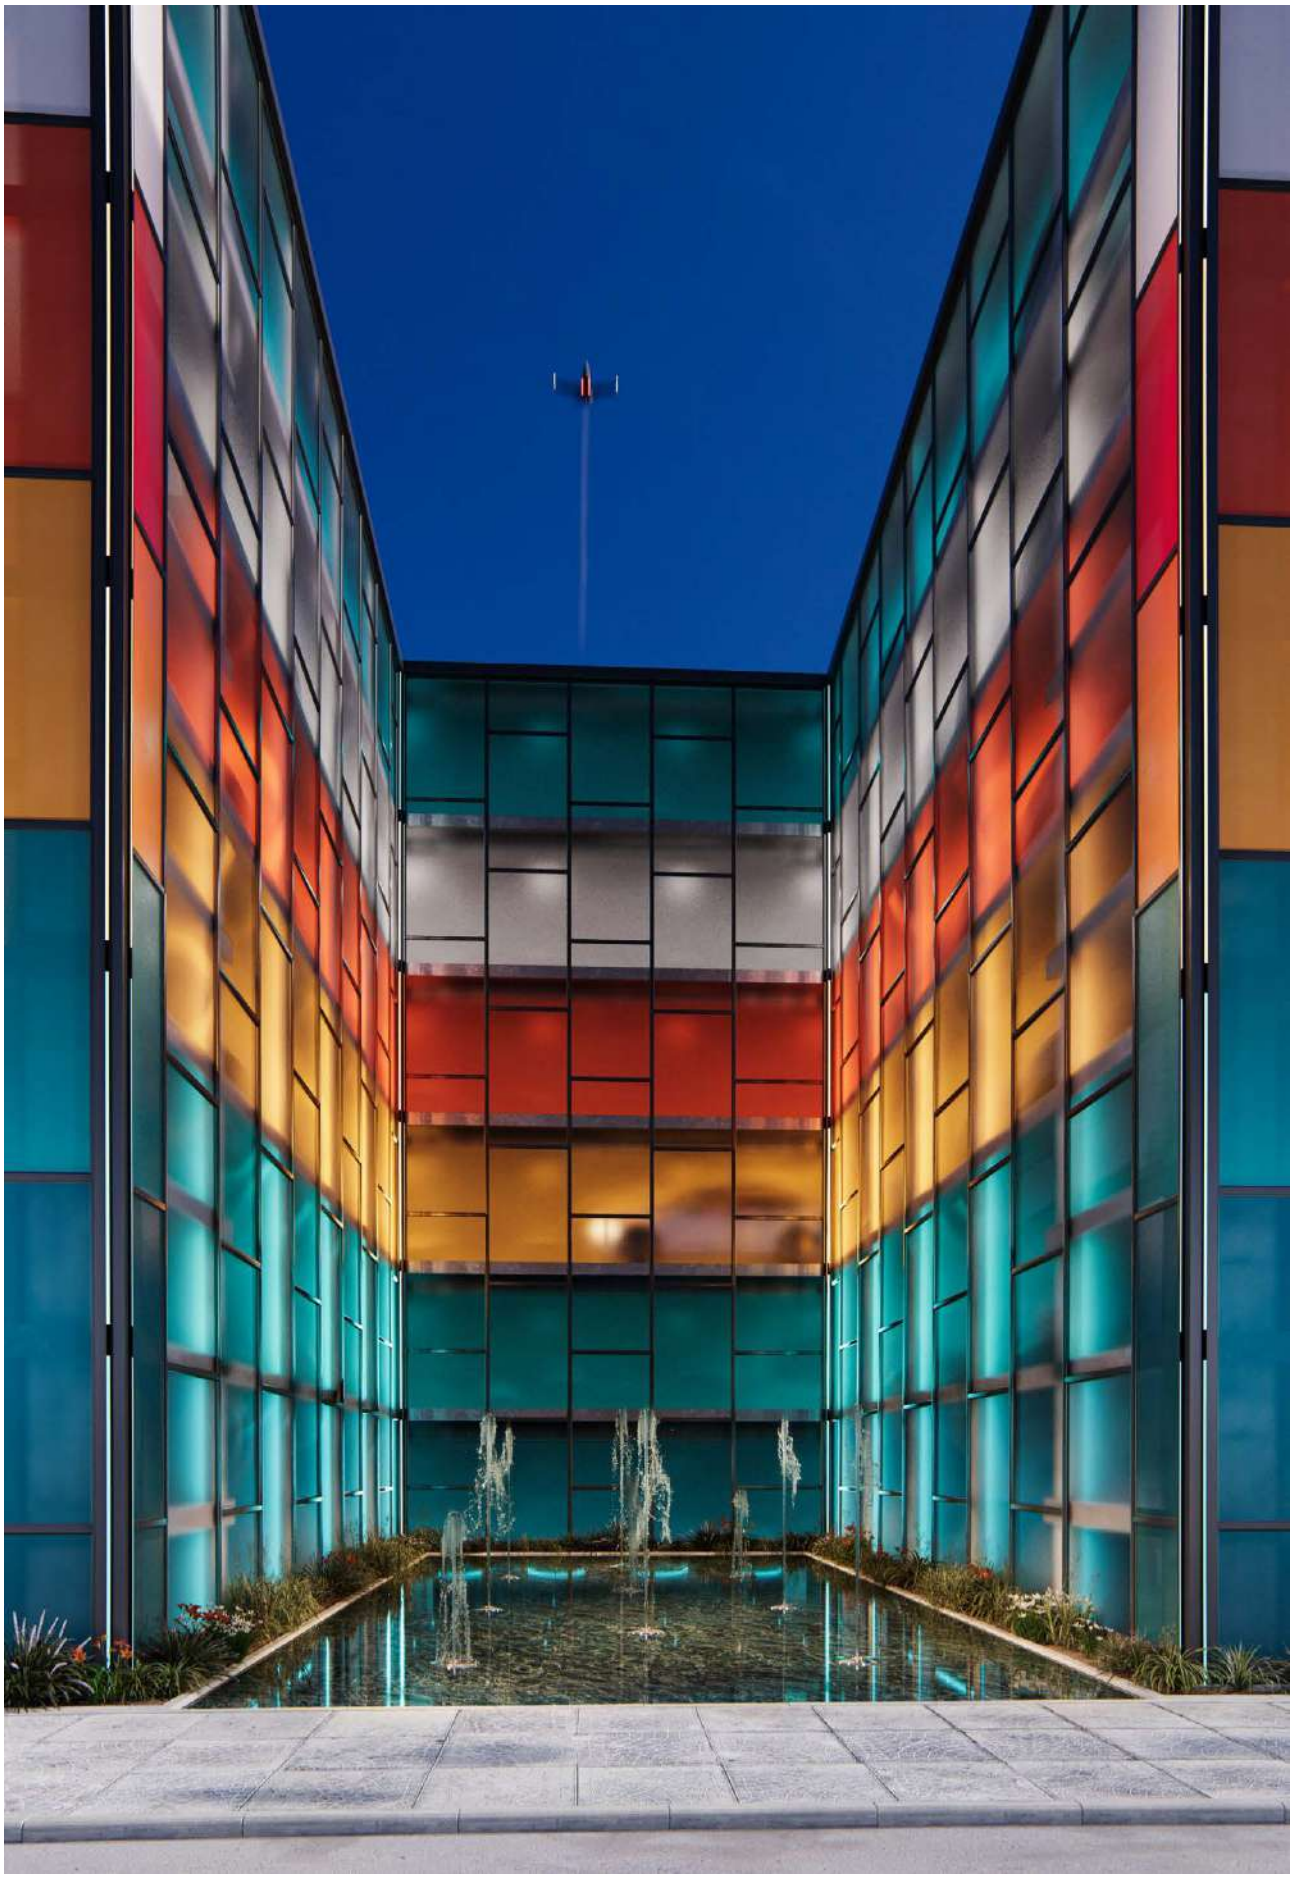


New

Fine 66 N



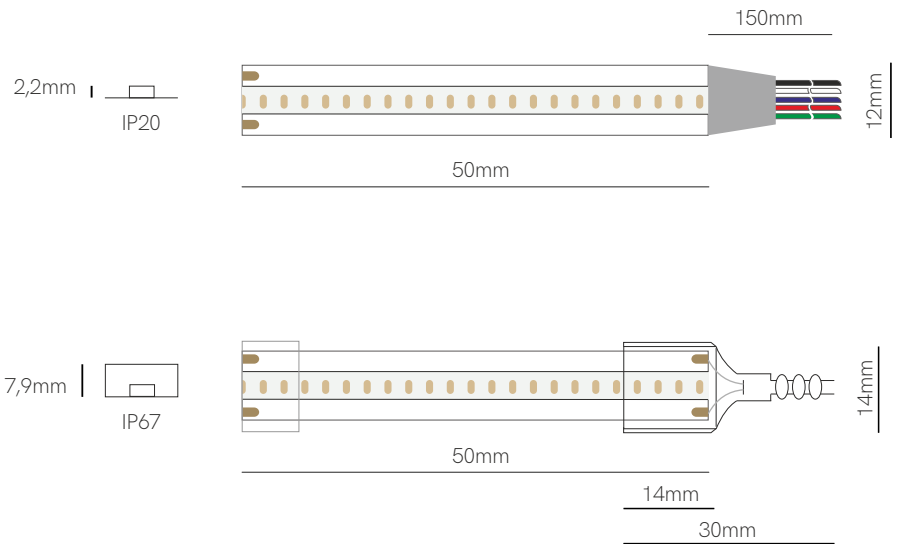

Compatible profiles.



Technical Information

V / A / W	24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	66470/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP20
	66477/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP67

Accessories



Joint
20066




Joint
20266

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS


5 YEARS WARRANTY | 24 W/m | 560 LED/m | 24 VDC | 50mm | CSP

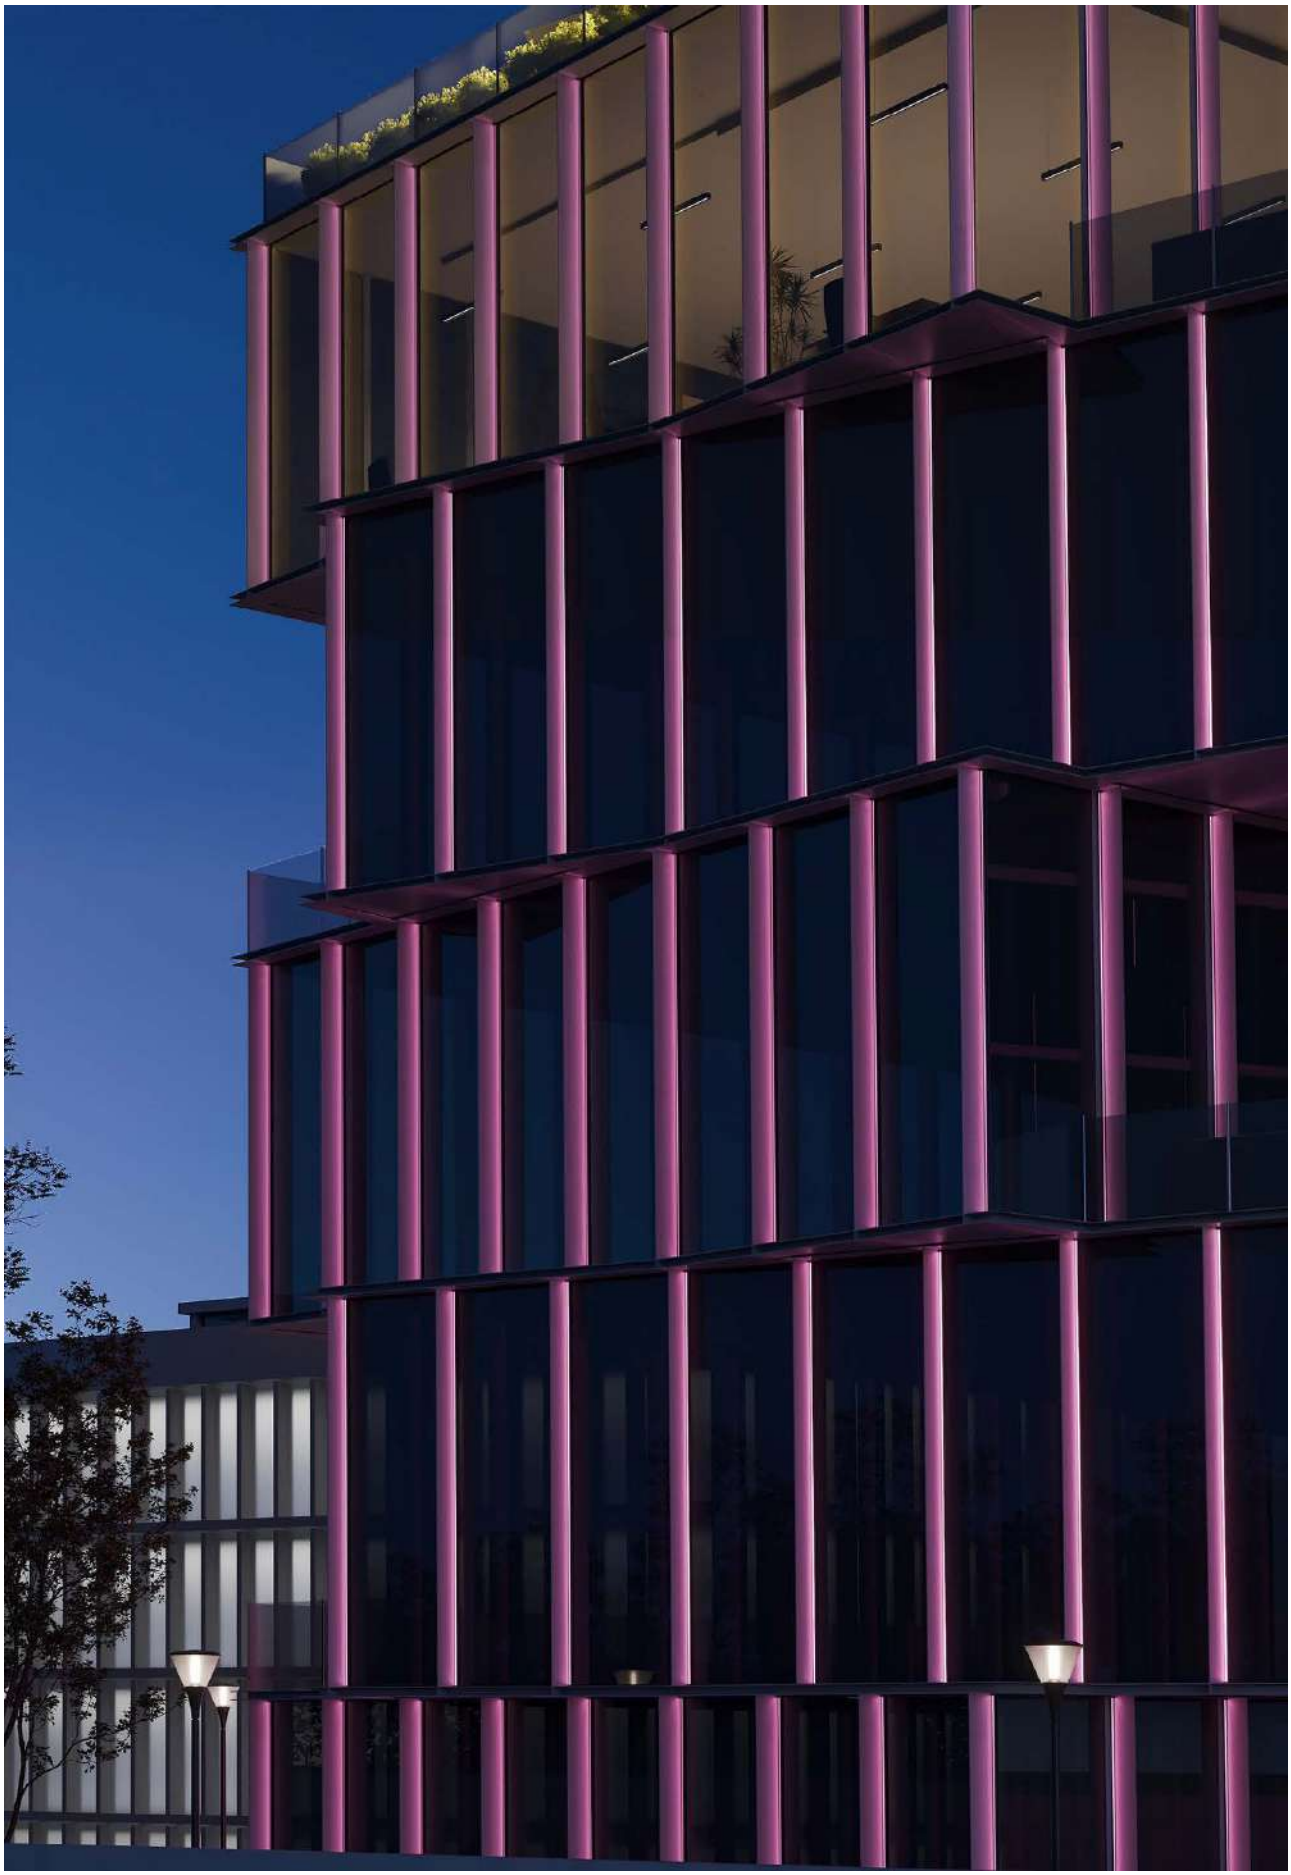


Fine 71



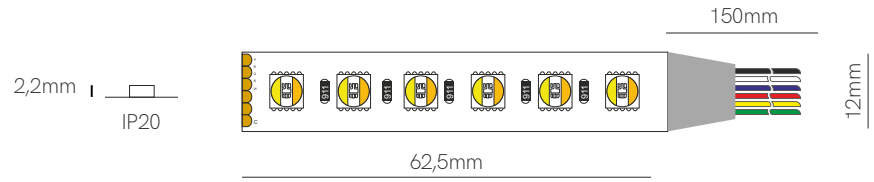

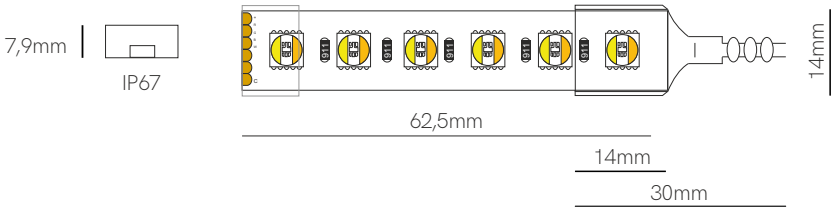

Compatible profiles.



Technical Information

V / A / W	24V / 0,875A / 21W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67

*Available in reel of 5 meters.


Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | 62,5mm | 5050

Fine 47



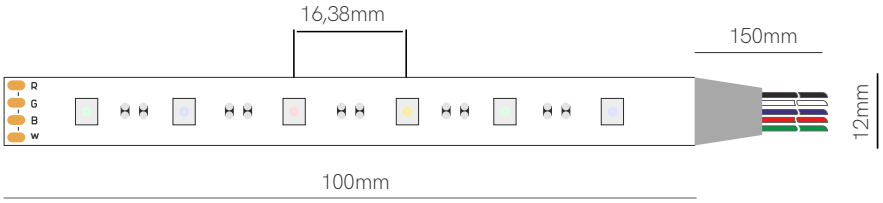



Compatible profiles.

Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
47430		18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
47440		18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20
47437	New	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP67
47447	New	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP67

Accessories



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

*Available in reel of 5 or 25 meters.


Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 100mm | 5050


Fine 45



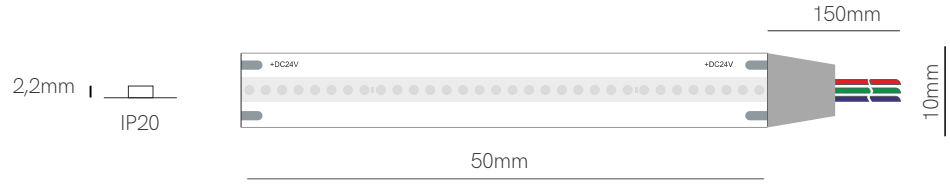

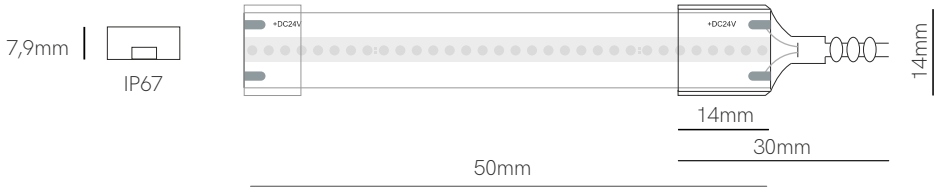

Compatible profiles.



Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	45220	15	150	RED	IP20
	45310	91	910	GREEN	IP20
	45520	13	130	BLUE	IP20
	45227	15	150	RED	IP67
	45317	91	910	GREEN	IP67
	45527	13	130	BLUE	IP67

Accessories



End Cap ☐ 32635
End Cap ☐ 32625
Clip ☐ 31709
Clip ☐ 31809
Joint ☐ 31909

*Available in reel of 10 meters.

Accessories pages 294-311.


CE RoHS

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | 50 mm | CSP

Running led strip

▶ VIDEO

Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip.
Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.
We do have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by Beneito & Faure, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

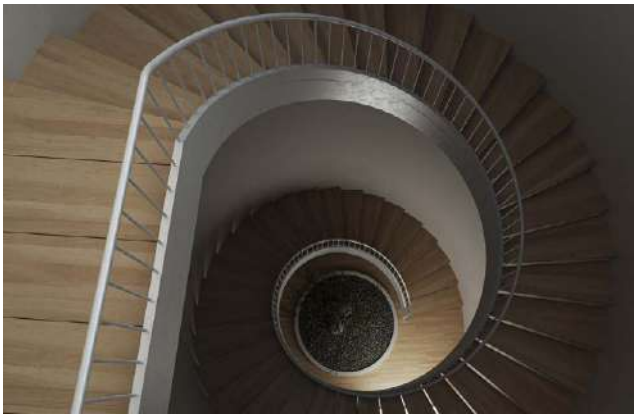





Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio.
Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por Beneito & Faure, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.






Fine running

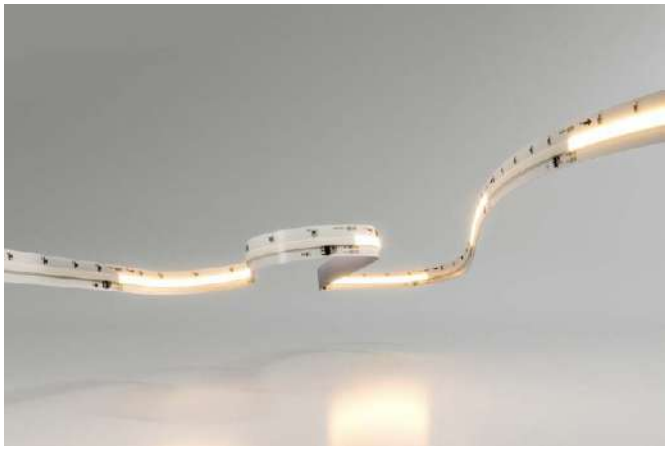

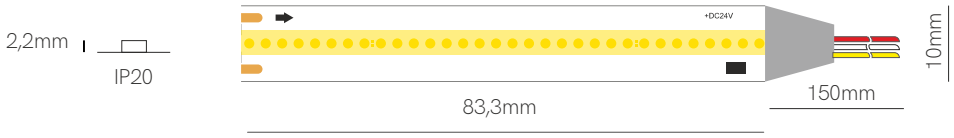

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
	SP1300	79 lm/w	950 lm/m	3000K	IP20
	SP1400	87 lm/w	1.050 lm/m	4000K	IP20

*Available in reel of 5 meters. Accessories pages 294-311.

Control

	Code	Version	Power Max	Pixels Max	VDC IN
	SP-9812	Controller	-	-	24 VDC
	SP-6329	Running Touch Controller	8A	1.024	24 VDC


CE RoHS


3 YEARS WARRANTY | 12 W/m | 360 LED/m | CRI ≥90 | 24 VDC | 83,3mm | SPI | COB




Fine SPI-2



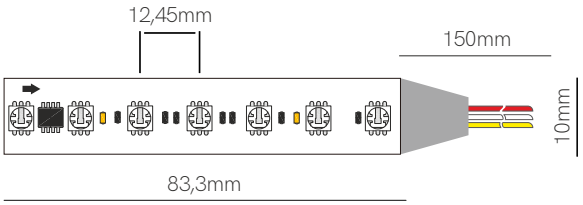



Compatible profiles.



Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
	SP2430	37 lm/w	515 lm/m	RGB	IP20
	SP2435 New	37 lm/w	515 lm/m	RGB	IP65

*Available in reel of 5 meters.
Accessories pages 294-311.


CE RoHS


3 YEARS WARRANTY | 14 W/m | 84 LED/m | III | 24 VDC | 83,3mm | SPI | 5050


aramco
aramco
aramco
aramco
aramco


Fine SPI-3



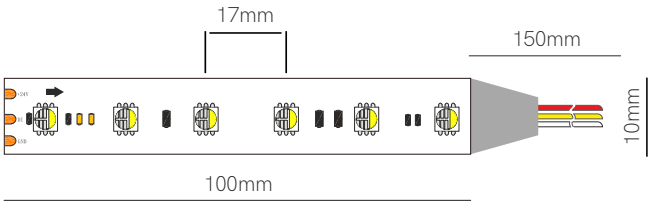



Compatible profiles.



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	SP3470	51 lm/w	561 lm/m	RGB-W 3.000K	IP20
	SP3475 New	51 lm/w	561 lm/m	RGB-W 3.000K	IP65


*Available in reel of 5 meters.
Accessories pages 294-311.


CE RoHS | 3 YEARS WARRANTY | 11 W/m | 60 LED/m | III | 24 VDC | 100mm | SPI | 5050




VIDEO

Fine SPI-4

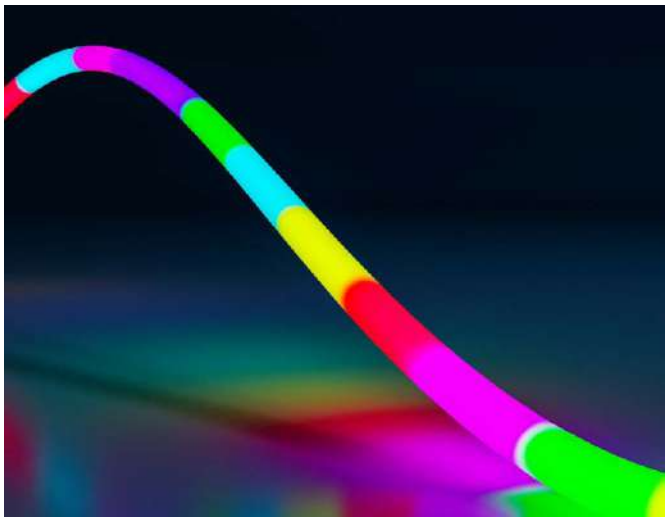

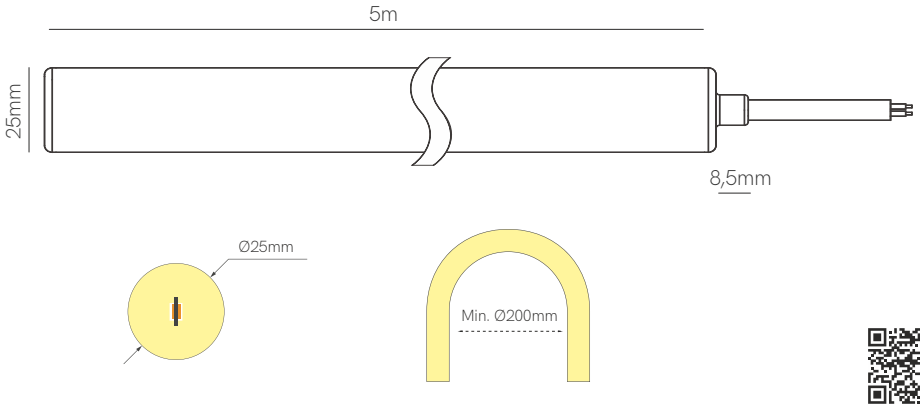

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP4437	12,5 lm/w	250 lm/m	RGB	IP67

Accessories

End Cap
○ 25627



End Cap
○ 25657-1
● 25657-2
○ 25657



Initial roof Cap
○ 25997-1
● 25997-2
○ 25997



Clip
○ 25530



Initial Cap
○ 25667-1
● 25667-2
○ 25667



Initial Cap
○ 25637



Tube
○ 25450



Joint with base
○ 25227-1
● 25227-2
○ 25227




Suspension kit
○ 25887


*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 168 LED/m | 24 VDC | 83,3mm | SPI | 5050



▶ VIDEO

Fine DMX-4

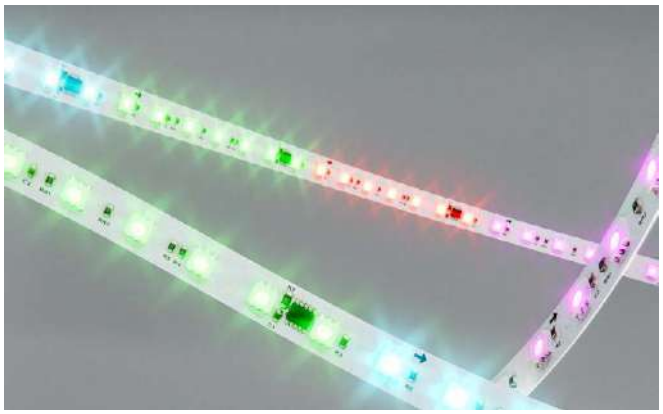

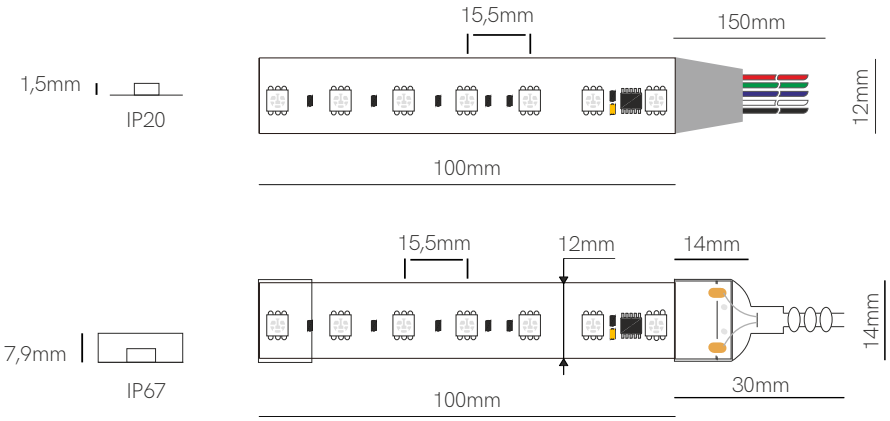

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM4430	42 lm/w	503 lm/m	RGB	IP20
	DM4437	42 lm/w	503 lm/m	RGB	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 5 meters.

Accessories pages 294-311.


CE RoHS

3 YEARS WARRANTY | 12 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050



▶ VIDEO

Fine DMX-5



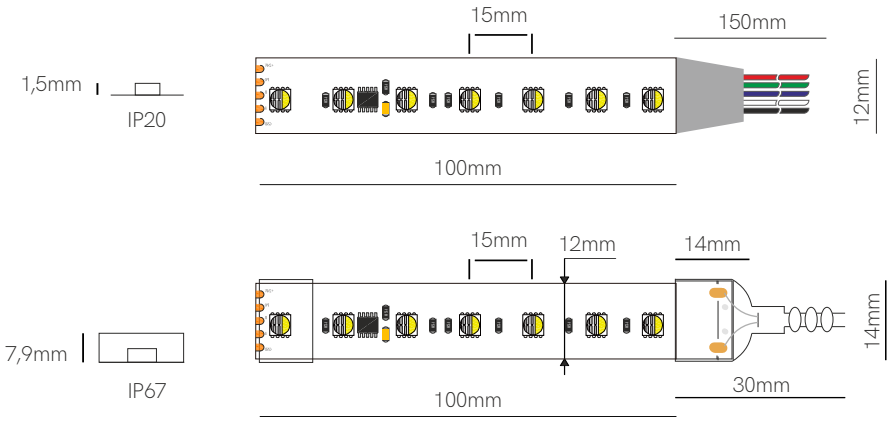

Compatible profiles.



Technical Information

V / A / W	24V / 0,7A / 17W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM5470	50 lm/w	861 lm/m	RGB-W 3.000K	IP20
	DM5477	50 lm/w	861 lm/m	RGB-W 3.000K	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 17 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050

NEON IP67 LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.



Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.


Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.






FITSEVENELEVEN®, Club Frankfurt Airport.

Fine 25

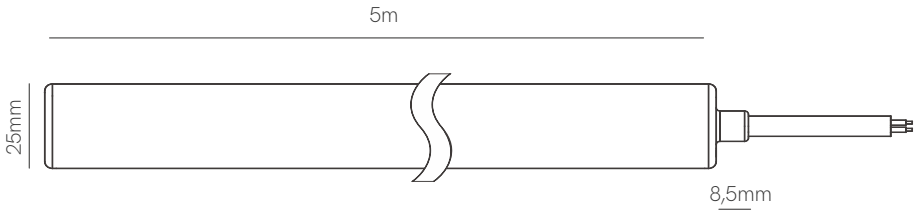

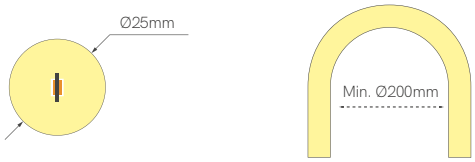

Technical Information

V / A / W	24V / 0,83A / 20W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1.200 lm/m	2400K	IP67
	25277	65 lm/w	1.300 lm/m	2700K	IP67
	25307	69 lm/w	1.380 lm/m	3000K	IP67
	25407	73 lm/w	1.460 lm/m	4000K	IP67
	25367	55 lm/w	1.100 lm/m	2700K-4200K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5 m, 3 m and 5 meters.

Accessories

End Cap
○ 25627



End Cap
○ 25657-1
● 25657-2
○ 25657



Initial roof Cap
○ 25997-1
● 25997-2
○ 25997



Clip
○ 25530



Initial Cap
○ 25667-1
● 25667-2
○ 25667



Initial Cap
○ 25637



Tube
○ 25450



Joint with base
○ 25227-1
● 25227-2
○ 25227



Suspension kit
○ 25887

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 320 LED/m | 480 LED/m (CCT) | 240 LED/m (RGB) | 24 VDC | 10mm / 50mm (CCT-RGB) | 2835 | 4040 (RGB) | CRI ≥90




New

Fine 34







Technical Information

V / A / W	24V / 0,21A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	34277	28 lm/w	140 lm/m	2700K	IP67
	34307	30 lm/w	150 lm/m	3000K	IP67
	34407	32 lm/w	160 lm/m	4000K	IP67

Accessories

End Cap
☐ 34627

End Cap
☐ 34967

End Cap
☐ 34637



Clip
25x5,8x5mm
☐ 34330



Clip
1000x5,8x5mm
☐ 34119

*Available in reel of 10 meters.

Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 5 W/m | 196 LED/m | 24 VDC | 35,7mm | 2216 | CRI ≥90




New


Fine 77



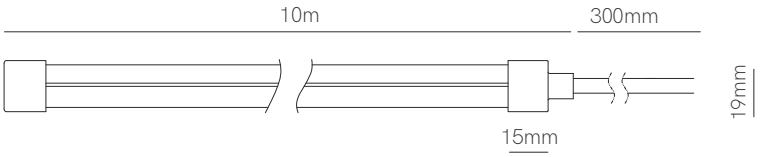





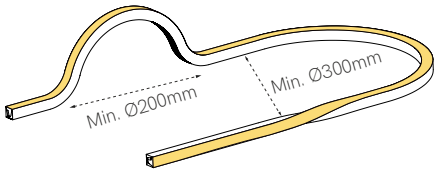

Technical Information

V / A / W	24V / 0,33A / 12W/m / 8W/m

Code	Lumens/w	Lumens/m	CCT	IP
77277	50 lm/w	600 lm/m	2700K	IP67
77307	51 lm/w	612 lm/m	3000K	IP67
77407	55 lm/w	660 lm/m	4000K	IP67
77437	26 lm/w	208 lm/m	RGB	IP67

Accessories




End Cap ☐ 77627
End Cap ☐ 77967
End Cap ☐ 77997
End Cap ☐ 77637
Clip 30x18x18mm ☐ 77580
Clip 1000x18x18mm ☐ 77819
Clip 1000x18x18mm ☐ 77953

*Available in reel of 10 meters. Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 12 W/m | 8 W/m (RGB) | 120 LED/m | 24 VDC | III | 50mm | 2835 | 4040 (RGB) | CRI ≥90



Fine 70

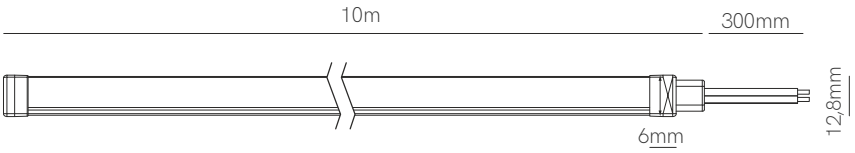





Technical Information

V / A / W	24V / 0,20A / 5W/m

Code	Lumens/w	Lumens/m	CCT	IP
70277	31 lm/w	155 lm/m	2700K	IP67
70307	35 lm/w	175 lm/m	3000K	IP67
70407	37 lm/w	185 lm/m	4000K	IP67
70437	15 lm/w	75 lm/m	RGB	IP67

Accessories

End Cap
☐ 70627

End Cap
☐ 70967

End Cap
☐ 70637



Clip
19,7x8x13mm
☐ 70330



Clip
1000x8x13mm
☐ 70119



Clip
1000x8,5x12,5mm
☐ 70350


*Available in reel of 10 meters.


Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 5 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm | 2835 | 4040 (RGB) | CRI ≥90



Fine 72

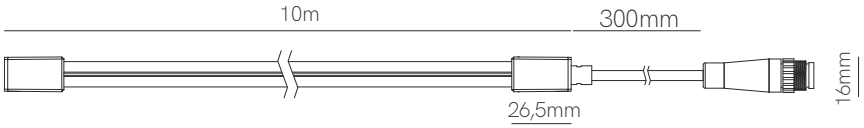





Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
72277	59 lm/w	590 lm/m	2700K	IP67
72307	62 lm/w	620 lm/m	3000K	IP67
72407	65 lm/w	650 lm/m	4000K	IP67
72437	26 lm/w	260 lm/m	RGB	IP67

Accessories



End Cap
☐ 72967-L2
☐ 72967-L4



End Cap
☐ 72967-2
☐ 72967-4



End Cap
☐ 72627-2
☐ 72627-4



End Cap
☐ 72637



Clip
20,2x16,8x12,5mm
☐ 77530



Clip
1000x19,2x17,8mm
☐ 77519



Clip
1000x26,4x18mm
☐ 77350




Extension cable
● 77946 (Mono)
● 77920 (RGB)

*Available in reel of 10 meters. Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 62,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90



Fine 74

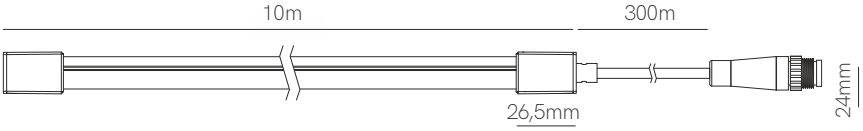





Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
74277	59 lm/w	590 lm/m	2700K	IP67
74307	62 lm/w	620 lm/m	3000K	IP67
74407	65 lm/w	650 lm/m	4000K	IP67
74437	22 lm/w	220 lm/m	RGB	IP67

Accessories



End Cap
- ☐ 74967-L2
- ☐ 74967-L4



End Cap
- ☐ 74967-2
- ☐ 74967-4



End Cap
- ☐ 74627-2
- ☐ 74627-4



End Cap
- ☐ 74637



Clip 20,2x16,8x12,5mm
- ☐ 77330



Clip 1000x19,2x17,8mm
- ☐ 77119



Clip 1000x26,4x18mm
- ☐ 77350



Extension cable
- ● 77946 (Mono)
- ● 77920 (RGB)


*Available in reel of 10 meters. Accessories pages 294-311.


CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 55,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90


▶ VIDEO

New

Dynamic control

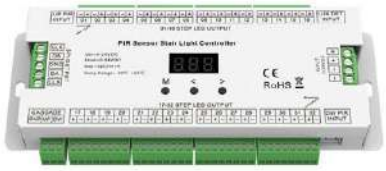




Stair light controller with dual PIR sensor + double push button (up & down), and daytime detection function. Controls a maximum of 32 steps.

PIR stair light controller (single color led strip)

Code		VDC IN	VDC OUT	Output current	Output power	Sensitive field	Sensitive angle
85732	☐	5-24VDC	32 x (5-24)VDC	32CH,1A/CH	32 x (5-24)W	⩽3m	30° (±10°)






Stair light controller / SPI led scenes + double push button (up & down). Controls speed and brightness. Suitable for multiple ICs.

SPI light controller (RGB or white light led pixel strip)

Code		VDC IN	Input current	Output signal	Pixel number
85769	☐	5-24VDC	15A	2 X SPI(TTL)	Max 960





Stair light controller / SPI led scenes with dual PIR sensor + double push button (up&down), and daylight detection function. Suitable for multiple ICs.

SPI light controller stairs / scenes (RGB or white light led pixel strip)

Code		VDC IN	Input current	Output signal	Pixel number	Sensitive field	Sensitive angle
85753	☐	5-24VDC	15A	2 X SPI(TTL)	Max 960	⩽3m	30° (±10°)

CE RoHS

5 YEARS WARRANTY | IP 20

Smart home solution

On - Off

0% 100%

Dimmable

2.700K 5.000K

CCT

Light color


Group

50%

3.500K

Scenes



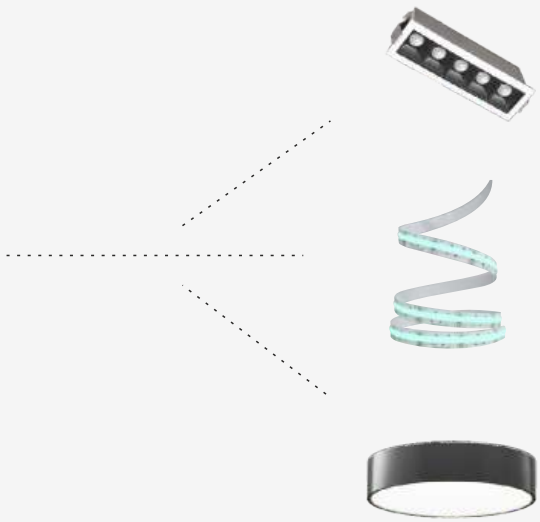

Add **more additional features** with Tuya Smart **Gateway**.

Schedule day and time

Control from anywhere via internet

Voice control with Alexa

Voice control with Google Home



Home Router

Tuya Gateway

All products with Tuya logo can have these functions.

CASAMBI

Professional solution

On - Off


0% 100%
Dimmable

2.700K 5.000K
CCT

Light color

Group

50%
3.500K
Scenes

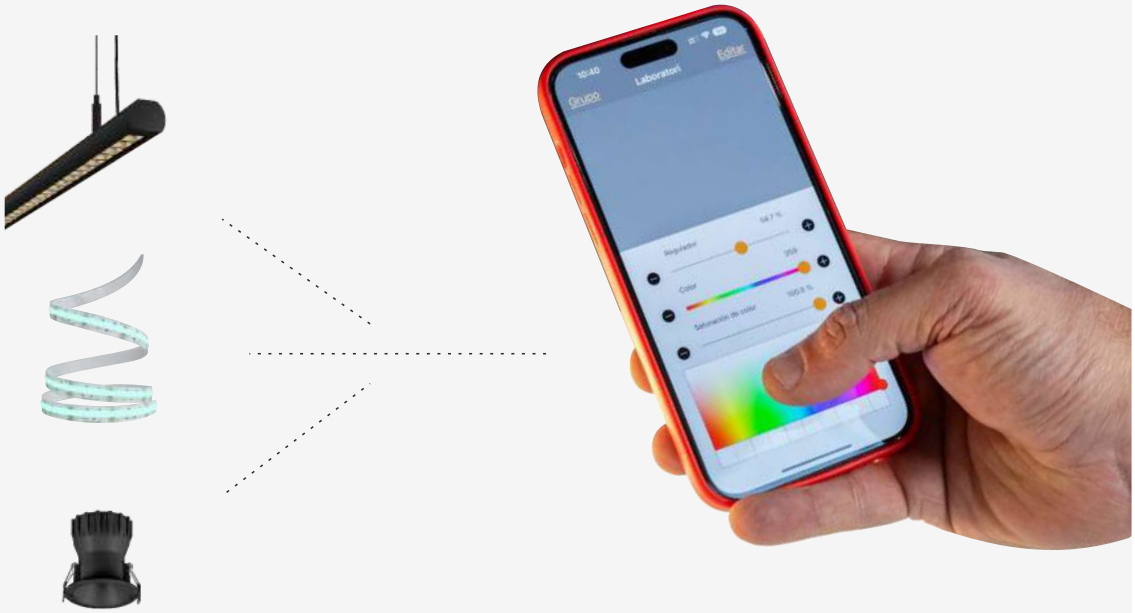


Add **more additional features** with Casambi Smart **Gateway**.

Schedule day and time

Control from anywhere via internet



All products with Casambi logo can have these functions.

1. 
2. 
3. 
4. 
5. 

6. 
7. 
8. 
9. 

New
10. 
New
11. 
New
12. 
New
13. 

RF Control for Tuya

	Code			Version	Power Max	VDC IN	Size
1.	85890	■		RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85360	■		RF CCT	-	3VDC (CD2032)	139x36x11mm
3.	85460	■		RF RGB	-	3VDC (CR2032)	139x36x11mm
4.	85470	■		RF RGB-W	-	3VDC (CR2032)	139x36x11mm
5.	85990	■		RF RGB+CCT	-	3VDC (CR2032)	139x36x11mm
6.	85894	■		RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
7.	85364	■		RF CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
8.	85475	■		RF RGB-W 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
9.	85995	■		RF RGB+CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
10.	85144	■	New	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
11.	85244	■	New	RF CCT 4 Zones 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
12.	85444	■	New	RF RGB/RGBW 4 Zones	-	3VDC (CR2032)	86x86x9,5mm
13.	85544	■	New	RF RGB+CCT 4 Zones	-	3VDC (CR2032)	86x86x9,5mm


tuya | RF

1. 
2. 
3. 

Control Tuya

	Code		Version	Power Max	VDC IN	Size
1.	22856	☐	Controller Tuya 5C	5Cx3A	12-24 VDC	114x38x20mm
2.	22821	☐	Controller Push/Tuya 2C	2Cx5A	12-36W	114x38x20mm
3.	22570	☐	Controller Push/Tuya/RF 5C	5Cx6A	12-48W	179x56x30mm


tuya

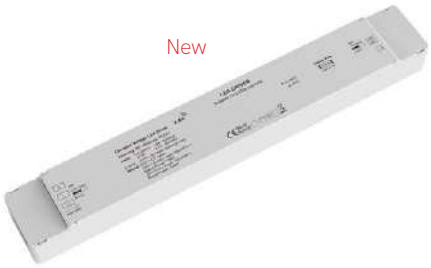1. New 
2. New 
3. New 

Power Supplies Push/RF

	Code			Power	IP	VAC IN	VDC OUT	Size
1.	82440	☐	New	40W	IP20	100-240 VAC	24 VDC	168x44x30mm
2.	82475	☐	New	75W	IP20	200/240 VAC	24 VDC	179x56x30mm
3.	82415	☐	New	150W	IP20	110-277 VAC	24 VDC	310x45x30mm

☐ | RF | PUSH |

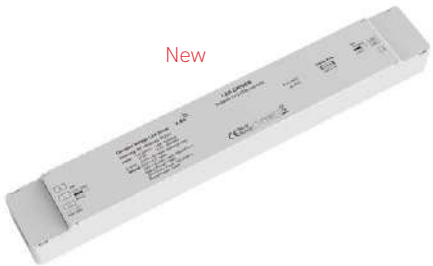1. New 

Power Supplies Push/RF/Tuya

	Code			Power	IP	VAC IN	VDC OUT	Size
1.	97415	☐	New	150W	IP20	100-277 VAC	24 VDC	310x45x30mm

☐ | RF | PUSH | tuya

CE RoHS

3 YEARS WARRANTY



1. 
2. 
3. 
4. 

Control Casambi

	Code	Version	Power Max	VDC IN	Size
1.	59682	Touch Dimmer Casambi 4C Oak/Black	-	-	Ø73x62mm
2.	59689	Touch Dimmer Casambi 4C Oak/Silver	-	-	Ø73x62mm
3.	59182	Touch Dimmer Casambi 4C Mahogany/Black	-	-	Ø73x62mm
4.	59189	Touch Dimmer Casambi 4C Mahogany/Silver	-	-	Ø73x62mm

CASAMBI

5. 

New

6. 

New

7. 

8. 

9. 

New

10. 

11. 

12. 

12. 

14. 

Control Casambi

	Code			Version	Power Max	VAC IN	Size
5.	59112	■		Casambi Wall touch panel Black	-	-	146x90x24mm
6.	59847	■	New	Casambi Touch Control (Includes 24VDC power supply and gateway code 57452)	-	220/230VAC	86x86x26mm
7.	57661	■	New	Casambi Control 4 buttons + wheel	-	-	66x63mm
8.	57241	□		Xpress Casambi White	-	-	90x90x12mm
9.	57242	■		Xpress Casambi Black	-	-	90x90x12mm
10.	57299	□	New	Casambi Control On/Off, dimming, CCT, scene	-	-	134 x 36 x 9mm
11.	59121	□		Wall switch batteryfree 2C White	-	-	81x81x14mm
12.	59122	■		Wall switch batteryfree 2C Anthracite	-	-	81x81x14mm
13.	59141	□		Wall switch batteryfree 4C White	-	-	81x81x14mm
14.	59142	■		Wall switch batteryfree 4C Anthracite	-	-	81x81x14mm

CASAMBI

15. 

16. 

17. 

18. 

19. 

20. 

21. 

22. 

23. 

24. 

25. 

Control Casambi

	Code		Version	Power Max	V IN	Size
15.	57924	■	Controller input 4 button Casambi	-	230 VAC	45x19x17mm
16.	59629	■	Smart Gateway Casambi	-	230 VAC	101x74x29mm
17.	59549	■	Led Strips regulator 5C Casambi/Push	5CX5A	12-48V	186x29x21mm
18.	59733	□	Relay Casambi	10A	-	120x50 x32mm
19.	59777	□	Triac Dimmable Casambi/Push	-	-	Ø52x15,5mm
20.	59249	□	Control CBU-PWM4 long range	4Cx1,5A	12-24 VDC	72,6x30x18mm
21.	59739	■	Relay Casambi	10A	200-240 VAC	35x22x35mm
22.	59519	■	Led Strips regulator 1C Casambi/Push	12A	12-48V	44x57x19mm
23.	59769	□	Controller End of phase long range	0,43A	85-240 VAC	72,6x30x18mm
24.	59789	□	Interface 0-10/1-10 Dali long range	-	220-240 VAC	40,4x36,2x14mm
25.	57588	■	Controller PWM4+Push	4Cx5A	12-24 VDC	88x54x25mm

CASAMBI

New



26.

New



27.

New



28.

New



29.

New



30.

New



31.

New



32.

New



33.

Control Casambi

	Code			Version	Power Max	V IN	Size
26.	57881	☐	New	Presence and illuminance mini sensor recessed White	0,4W	220/240 VAC	38X38X48mm
27.	57882	■	New	Presence and illuminance mini sensor recessed Black	0,4W	220/240 VAC	38X38X48mm
28.	57666	☐	New	Presence and illuminance sensor recessed White	0,05A	100-240 VAC	79x85x85mm
29.	57662	☐	New	Casambi Gateway 2 output 0-10V, 1-10V or 1 DALI	-	100-277 VAC	76x26x23mm
30.	59289	■	New	Led Strips regulator 2C Casambi/Push	10A	12-48 VDC	136x29x21mm
31.	57452	■	New	Casambi Gateway 45 profiles 8 groups / 8 scenes	-	100-254 VAC	57x44x25mm
32.	57400	■	New	Waterproof box 2XM20 for input and output. IP66	-	-	131x68x37mm
33.	57001	■	New	Timer Casambi	-	12-48 VDC	58x45x25mm

CASAMBI

CE RoHS

3 YEARS WARRANTY | IP 20

LED Strips accessories

1. 
2. 
3. 
4. 
5. 
6. 

Control Basic

	Code		Version	Power Max	VDC IN	Size
1.	90990	☐	RF Mono Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
2.	89260	☐	RF CCT Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
3.	88460	☐	RF RGB Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
4.	91430	☐	RF RGB-W Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
5.	86019	☐	Controller Mono/CCT/RGB Basic	3Cx5A	12-24 VDC	145x46x18mm
6.	87029	☐	Controller RGB-W Basic	5Cx5A	12-24 VDC	145x46x18mm

RF

1. 
2. 
3. 
4. 
5. 
6. 

Control Top

	Code		Version	Power Max	VDC IN	Size
1.	81990	■	RF Mono Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
2.	80260	■	RF CCT Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
3.	79430	■	RF RGB-W Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
4.	77019	☐	Controller Mono/CCT/RGB/RGB-W Top	4Cx5A	12-23 VDC / 5Ax4C	178x46x18mm
5.	82995	☐	RF Mono Button Panel Top	-	24 VDC	86x86x41mm
6.	83475	■	RF RGB-W Button Panel Top	-	24 VDC	86x86x41mm

RF

CE RoHS

1. 

2. 

3. 

4. 

5. 

Control SPI

	Code		Version	Power Max	Pixels Max	VDC IN	Size
1.	92353	■	SPI 1 Zone RGB/RGB-W Remote	-	-	3VDC (CR2032)	107x58,5x9mm
2.	92473	□	Controller SPI (RGB/RGB-W)	8A	1.024	5-24 VDC	97x33x18mm
3.	92853	□	Controller SPI / Tuya (RGB/RGB-W)	8A	1.000	5-24 VDC	114x38x20mm
4.	92553	□	SPI Signal Repeater	-	-	5-24 VDC	52x52x126mm
5.	92699	■	Controller SPI / Computer	-	2.048	5-24 VDC	159x89x24mm

tuya | RF | SPI

1. 

2. 

3. 

4. 

5. 


6. 

Control DMX

	Code		Version	Power Max	V IN	Size
1.	96009	□	Controller DMX / Triac 2CH	2Cx1A	100-240 VAC	170x50x23mm
2.	93470	■	RF RGB-W DMX Touch Panel 4 Zone	-	100-240 VAC	86x86x33mm
3.	95153	□	Amplifier DMX 2CH	-	12-48 VDC	175x45x27mm
4.	93579	■	Decoder DMX 5152 5CH	5Cx4A	12-48 VDC	175x46x24mm
5.	95479	■	Decoder DMX 5152 4CH	4Cx5A	12-48 VDC	175x46x24mm
6.	95179	□	Decoder DMX 5152 1CH	15A	12-24 VDC	170x50x23mm

DMX




CE RoHS

1. 
2. 
3. 
4. 
5. 
6. 

Control Push / Triac

	Code		Version	Power Max	V IN	Size
1.	85890	■	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
2.	85894	■	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
3.	84431	□	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	85876	□	Controller Wifi RF Push Triac Tuya	1,5A	100-240 VAC	52x52x26mm
6.	85884	□	Controller RF Push Triac	2A	100-240 VAC	110x48x67mm

tuya | PUSH | DALI

1. 
2. 
3. 
4. 
5. 
6. 

Control PMW / RF

	Code		Version	Power Max	VDC IN	Size
1.	85890	■	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85894	■	RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
3.	84431	□	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	22799	□	Controller Push/RF Progressive	8A	12-48 VDC	120x43x27mm
6.	22726	□	Control Push - Dim / RF	8A	5-36 VDC	97x33x18mm

RF | PMW

CE RoHS

3 YEARS WARRANTY | IP 20



New

Control Dali touch

Code		Version	Power Max	VDC IN	Size
29187	■ New	Controller Dali DT8 2GR/10 scenes	10A	12-24 VDC	86X86X26mm



New

Control Dali SPI APP

Code		Version	Power Max	VDC IN	Size
29735	■ New	Controller Dali SPI APP	7A	5-12-24 VDC	120x29x21mm



Control Dali Push Triac

Code		Version	Power Max	VAC IN	Size
22948	□	Controller Dali+Push/Triac	1,5A	100-240 VAC	187x46x22mm



New

Control Dali Push

Code		Version	Power Max	VDC IN	Size
29777	■ New	Controller Dali 4CH	10A	12-24 VDC	88x54x26mm

CE RoHS

3 YEARS WARRANTY | IP 20





New

Led Driver CC Dali

	Code			Power Max	VDC IN	VDC OUT	I OUT	Size
1.	CCT-10DA	☐	New	10W	100-277 VAC	3-42 VDC	100-450mA	135x30x20mm
2.	CCT-20DA	☐	New	20W	100-277 VAC	3-42 VDC	250-700mA	160x43x20mm
3.	CCT-40DA	☐	New	40W	100-277 VAC	3-65 VDC	300-1.400mA	172x54x20mm
4.	CCT-60DA	☐	New	60W	100-277 VAC	3-65 VDC	600- 2.100mA	192x62x24mm

☐ | DALI 2

1. 

2. 

Control Dali Push

	Code		Version	Power Max	VDC IN	Size
1.	22490	☐	Controller PWM Dali Push 1-10V	12A	12-24-48 VDC	155x51x26mm
2.	22499	☐	Controller PWM Dali Push 1-10V	5A	12-24-48 VDC	132x22x20mm

PUSH | DALI

CE RoHS

3 YEARS WARRANTY | IP 20



New

Led Driver CC Triac

	Code			Power Max	VDC IN	VDC OUT	I OUT	Size
1.	CCT-10TR	☐	New	10W	220-240 VAC	3-42 VDC	100-450mA	135x30x20mm
2.	CCT-20TR	☐	New	20W	220-240 VAC	3-42 VDC	250-700mA	160x43x20mm
3.	CCT-40TR	☐	New	40W	220-240 VAC	3-65 VDC	300-1.400mA	172x54x20mm
4.	CCT-60TR	☐	New	60W	220-240 VAC	3-65 VDC	600- 2.100mA	192x62x24mm

TRIAC DIMM

1. 

2. 

Control Driver RF / Push

	Code		Version	Power Max	VDC IN	Size
1.	22911	☐	Controller 4CH RF Push	3-45 VDC/150-500mA	12-48 VDC	139x36x11mm
2.	22974	☐	Controller 4CH RF Push	3-45 VDC/350-1.200mA	12-48 VDC	138x50x22mm

RF | PUSH

CE RoHS

3 YEARS WARRANTY | IP 20



1. 

2. 

3. 

4. 

5. 

Motion Sensor

	Code		Version	Power Max	V IN	Size
1.	85993	■	Mini Sensor Mono PWM	6A	12-24 VDC	55x10mm
2.	85263	■	Mini Sensor CCT PWM	2Cx4A	12-24 VDC	55x10mm
3.	85183	■	Motion Sensor Pir	8A	12-24 VDC	55x10mm
4.	85332	○	Motion Sensor Surface Pir	4A	12-24 VDC	45x62mm
5.	85999	○	Microwave induction dimmer & switch	4A	100-240 VAC	95x40mm

1. 

2. 
New

3.
4. 

5. 
New

6. 

7. 
New

8.
9. 

10. 
New

Motion Sensor

	Code			Version	Power Max	VDC IN	Size
1.	85220	□		Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
2.	85290	■	New	Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
3.	85120	□		Sensor Simple Surface door	4A	12-24 VDC	12x12mm
4.	85420	□		Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
5.	85190	■	New	Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
6.	85626	○		Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
7.	85696	●	New	Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
8.	85336	○		Sensor Simple Recessed door	4A	12-24 VDC	14x18mm
9.	85330	○		Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm
10.	85396	●	New	Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm

CE RoHS

3 YEARS WARRANTY | IP 20

Power Supplies 24V

Power Supplies Standard

Code	Power	IP	VAC IN	VDC OUT	Size
62430	30W	IP20	198-264 VAC	24 VDC	162x42x30mm
62460	60W	IP20	198-264 VAC	24 VDC	187x45x30mm
62475	75W	IP20	198-264 VAC	24 VDC	187x45x30,5mm
62412	120W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62415	150W	IP20	198-264 VAC	24 VDC	268x45x30,5mm



Power Supplies Basic

Code	Power	IP	VAC IN	VDC OUT	Size
22420	24W	IP67	176-264 VAC	24 VDC	110x40x30mm
22435	40W	IP67	176-264 VAC	24 VDC	148x40x30mm
22460	60W	IP67	176-264 VAC	24 VDC	162,5x42,5x32mm
22410	100W	IP67	176-264 VAC	24 VDC	190x52x33mm



Power Supplies Top

Code	Power	IP	VAC IN	VDC OUT	Size
22415	150W	IP67	90-264 VAC	24 VDC	191x63x37,5mm
22424	240W	IP67	90-305 VAC	24 VDC	244,2x68x38,8mm
22430	300W	IP67	90-305 VAC	24 VDC	246x77x39,5mm
22432	320W	IP67	90-305 VAC	24 VDC	252x90x43,8mm



Power Supplies Slim

Code	Power	IP	VAC IN	VDC OUT	Size
TR3024	30W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR6024	60W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR10024	100W	IP20	220-240V VAC	24 VDC	350X30X18mm
TR16024	150W	IP20	220-240V VAC	24 VDC	350X30X18mm



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

Power Supplies Triac

Code			Power	IP	VAC IN	VDC OUT	Size
24609	☐		60W	IP20	200-240 VAC	24 VDC	178x61x24mm
24109	■		100W	IP66	200-240 VAC	24 VDC	230x70x43mm
24159	■		150W	IP66	200-240 VAC	24 VDC	256x78x47mm
24309	■		300W	IP66	200-240 VAC	24 VDC	276x78x47mm
TR10024TR	☐	New	100W	IP20	200-240 VAC	24 VDC	330x30x22mm
TR15024TR	☐	New	150W	IP20	200-240 VAC	24 VDC	330x30x22mm





New

TRIAC DIMM

Power Supplies Dali-2 / Push

Code			Power	IP	VAC IN	VDC OUT	Size
64458	☐		45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64808	☐		80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64158	☐		150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
TR3024DA	☐	New	12-30W	IP20	200-240 VAC	24 VDC	300x30x16mm
TR6024DA	☐	New	60W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR10024DA	☐	New	30-100W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR15024DA	☐	New	45-150W	IP20	200-240 VAC	24 VDC	350x30x18mm





New

Power Supplies Dali-2

Code		Power	IP	VAC IN	VDC OUT	Size
24758	■	90W	IP67	100-305 VAC	24 VDC	180x63x35,5mm
24108	■	120W	IP67	100-305 VAC	24 VDC	199x63x35,5mm
24208	■	200W	IP67	100-305 VAC	24 VDC	219x63x35,5mm
24308	■	300W	IP66	110-277 VAC	24 VDC	301x78x25,1mm



*24208 / 24308 Push / Dali

24308

Power Supplies Dali-2 DT-8 / Push Dim - CCT

Code		Power	IP	VAC IN	VDC OUT	Size
64453	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64803	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64153	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

Led strips accessories

SMD 10mm Monocolor IP20


Joint
13,8x11,55x3,9mm
☐ 20220


Joint
13,55x11,67x4,7mm
☐ 20120


Joint
15,4x11,5x5,7mm
☐ 20991


Joint
21,6x11,5x5,7mm
☐ 20999


L Joint
19x12x5mm
☐ 20C90 New


L Joint
19x19x5mm
☐ 20T90 New

SMD 10mm Monocolor IP65

End Cap
○ 20635

End Cap
○ 20625


Joint
24,3x14,6x7,7mm
☐ 20225


Joint
24,3x14,6x7,7mm
☐ 20125

SMD 10mm Monocolor IP67

End Cap
☐ 32635

End Cap
☐ 32625

Fine 32 / Fine 75 IP65

End Cap
☐ 32635

End Cap
☐ 32625


Connector kit
☐ 32699


Join 180°
☐ 32899


Join 90°
☐ 32499


Clip
☐ 32900

Joint
☐ 32299

COB 10mm Monocolor IP20


Joint
☐ 31709


Joint
☐ 31809


Joint
☐ 31909


L Joint
19x12x5mm
☐ 20C90 New


L Joint
19x19x5mm
☐ 20T90 New

COB 10mm Monocolor IP67

End Cap
☐ 32635

End Cap
☐ 32625

SMD 10mm CCT IP20


Joint
13,8x11,55x3,9mm
☐ 20230


Joint
13,55x11,67x4,7mm
☐ 20130

SMD 10mm CCT IP65

End Cap
☐ 20635

End Cap
☐ 20625



Joint
24,3x14,6x7,7mm
☐ 20235



Joint
24,3x14,6x7,7mm
☐ 20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

SMD 10mm RGB IP65

End Cap
○ 20635

End Cap
○ 20625



Joint
24,3x14,6x7,68mm
☐ 20245



Joint
24,3x14,6x7,68mm
☐ 20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

COB 12mm RGBW IP20



Joint
☐ 20066



Joint
☐ 20266

SMD 4mm Monocolor IP20



Joint
☐ 20049



Joint
☐ 20249

Single-wire connections



20917



20915

Bipolar connections



20927





20925

FINE 25	0,75 mm	1,50 mm	–	–	–
FINE 30	1,00 mm	–	–	–	–
FINE 31	0,50 mm	1,00 mm	–	–	–
FINE 32N	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 34	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 36	0,50 mm	1,00 mm	–	–	–
FINE 37	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 41	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 42	0,50 mm	1,00 mm	–	–	–
FINE 43	0,50 mm	1,00 mm	–	–	–
FINE 44	0,50 mm	0,75 mm	–	–	–
FINE 45	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 46	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 47	0,35 mm	0,75 mm	1,50 mm	–	–
FINE 48	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 49	0,50 mm	–	–	–	–
FINE 50	0,35 mm	–	–	–	–
FINE 51	0,50 mm	0,75 mm	1,00 mm	1,50 mm	–
FINE 52	0,75 mm	1,50 mm	–	–	–
FINE 54	0,50 mm	0,75 mm	–	–	–
FINE 55	1,00 mm	–	–	–	–
FINE 56	0,75 mm	1,50 mm	–	–	–
FINE 60	0,35 mm	0,50 mm	–	–	–
FINE 61	0,50 mm	0,75 mm	–	–	–
FINE 63	0,50 mm	1,00 mm	–	–	–
FINE 64	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 66 N	0,75 mm	1,50 mm	–	–	–
FINE 68	0,50 mm	1,00 mm	–	–	–
FINE 69	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 70	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 71	0,75 mm	1,50 mm	–	–	–
FINE 72	0,50 mm	0,75 mm	–	–	–
FINE 74	0,50 mm	0,75 mm	–	–	–
FINE 75	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 76	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 77	0,50 mm	1,00 mm	–	–	–
FINE 79	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 82	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 84	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 88	0,50 mm	1,00 mm	–	–	–
FINE 92	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 96	0,50 mm	1,00 mm	–	–	–
FINE 97	0,50 mm	0,75 mm	1,00 mm	–	–
FINE DMX-4	0,50 mm	–	–	–	–
FINE DMX-5	0,50 mm	–	–	–	–
FINE RUNNING	0,50 mm	–	–	–	–
FINE SPI-2	0,50 mm	–	–	–	–
FINE SPI-3	0,50 mm	–	–	–	–
FINE SPI-4	0,75 mm	–	–	–	–

*Cable section.

Light perception

	Open circuit					Back feed				
										
	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 25	100%	–	–	–	–	–	–	–	–	–
FINE 30	100%	–	–	–	–	–	–	–	–	–
FINE 31	100%	90%	–	–	–	100%	95%	–	–	–
FINE 32N	100%	98%	95%	92%	90%	–	–	–	–	–
FINE 34	100%	100%	–	–	–	–	–	–	–	–
FINE 36	100%	86%	–	–	–	100%	93%	–	–	–
FINE 37	100%	100%	100%	95%	90%	100%	100%	100%	100%	100%
FINE 41	100%	80%	70%	–	–	100%	94%	90%	–	–
FINE 42	100%	87%	–	–	–	100%	93%	–	–	–
FINE 43	100%	–	–	–	–	100%	98%	–	–	–
FINE 44	100%	80%	–	–	–	100%	94%	–	–	–
FINE 45	100%	80%	70%	–	–	100%	94%	85%	–	–
FINE 46	100%	80%	70%	–	–	100%	94%	90%	–	–
FINE 47	100%	80%	70%	–	–	100%	95%	90%	–	–
FINE 48	100%	100%	85%	–	–	100%	100%	96%	–	–
FINE 49	100%	–	–	–	–	–	–	–	–	–
FINE 50	100%	–	–	–	–	–	–	–	–	–
FINE 51	100%	100%	100%	100%	–	–	–	–	–	–
FINE 52	100%	90%	–	–	–	100%	98%	–	–	–
FINE 54	100%	80%	–	–	–	100%	90%	–	–	–
FINE 55	100%	80%	–	–	–	100%	95%	–	–	–
FINE 56	100%	80%	–	–	–	100%	95%	–	–	–
FINE 60	100%	90%	–	–	–	100%	98%	–	–	–
FINE 61	100%	90%	80%	–	–	100%	98%	92%	–	–
FINE 63	100%	80%	–	–	–	100%	92%	–	–	–
FINE 64	100%	100%	90%	–	–	100%	100%	96%	–	–
FINE 66 N	100%	88%	–	–	–	100%	95%	–	–	–
FINE 68	100%	95%	–	–	–	100%	100%	–	–	–
FINE 69	100%	95%	90%	85%	–	100%	100%	95%	95%	–
FINE 70	100%	–	–	–	–	–	–	–	–	–
FINE 71	100%	87%	–	–	–	100%	97%	–	–	–
FINE 72	100%	–	–	–	–	–	–	–	–	–
FINE 74	100%	–	–	–	–	–	–	–	–	–
FINE 75	100%	98%	95%	92%	90%	–	–	–	–	–
FINE 76	100%	80%	70%	–	–	100%	95%	90%	–	–
FINE 77	100%	–	–	–	–	–	–	–	–	–
FINE 79	100%	90%	85%	–	–	100%	97%	95%	–	–
FINE 82	100%	100%	85%	–	–	100%	100%	90%	–	–
FINE 84	100%	95%	90%	85%	–	100%	100%	95%	95%	–
FINE 88	100%	–	–	–	–	–	–	–	–	–
FINE 92	100%	100%	85%	–	–	100%	100%	90%	–	–
FINE 96	100%	80%	–	–	–	100%	95%	–	–	–
FINE 97	100%	95%	90%	–	–	100%	100%	95%	–	–
FINE DMX-4	100%	–	–	–	–	–	–	–	–	–
FINE DMX-5	100%	–	–	–	–	–	–	–	–	–
FINE RUNNING	100%	–	–	–	–	–	–	–	–	–
FINE SPI-2	100%	–	–	–	–	–	–	–	–	–
FINE SPI-3	100%	–	–	–	–	–	–	–	–	–
FINE SPI-4	100%	–	–	–	–	–	–	–	–	–

*Efficiency (%).


Profiles and Led strips compatibility table

	FINE 30	FINE 31		FINE 32/N	FINE 36	FINE 37	FINE 41		FINE 42	FINE 43	FINE 44	FINE 45		FINE 46		FINE 47		FINE 48		FINE 49	FINE 50	FINE 51		FINE 52		FINE 54		FINE 55	FINE 56
	IP-20	IP-20	IP-67	IP-65	IP-20	IP-20	IP-20	IP-65	IP-20	IP-20	IP-20	IP-20	IP-65	IP-20	IP-65	IP-20	IP-67	IP-20	IP-65	IP-20	IP-20	IP-20	IP-65	IP-20	IP-67	IP-20	IP-65	IP-20	IP-20
BOX 10	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 11	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	OK	NO	NO	NO	NO	NO	NO	NO	NO
BOX 12	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 13	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	OK	NO	NO	NO	NO	NO	NO	NO	NO
BOX 14	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	NO	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 15	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 16	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 17	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 18	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 19	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 21	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 22	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 23	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO
BOX 24	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 27	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 28	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 29	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 30 (12)	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 30 (20)	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	NO
BOX 32	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 33	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 35	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
BOX 37	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
BOX 38	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
BOX 39	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 43	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	NO
BOX 53	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO
BOX 60	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 65	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	NO	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 67	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 68	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 69	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
BOX 71	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	NO
BOX 73	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 74	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	NO
BOX 75	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 87	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	OK	NO	NO	NO	NO	NO	NO	NO	NO
BOX 92	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 95	NO	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	OK	OK	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 98	NO	OK	NO	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	NO	NO	OK	OK	OK	OK	OK	NO	NO	NO	OK	NO	NO	NO
BOX 99	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	OK	NO	NO	NO	NO	NO	NO	NO	NO

BENEITO FAURE®


FINE 60	FINE 61		FINE 63		FINE 64	FINE 66/N		FINE 68	FINE 69		FINE 71		FINE 75	FINE 76	FINE 79		FINE 82	FINE 84		FINE 88	FINE 92	FINE 97	SP1	SP2		SP3		DMX4		DMX5	
IP-20	IP-20	IP-65	IP-20	IP-65	IP-20	IP-20	IP-65	IP-20	IP-20	IP-65	IP-20	IP-67	IP-65	IP-20	IP-20	IP-65	IP-20	IP-20	IP-65	IP-20	IP-20	IP-20	IP-20	IP-20	IP-65	IP-20	IP-65	IP-20	IP-67	IP-20	IP-65
OK	OK	OK	OK	NO	OK	OK	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
NO	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	NO	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	NO	NO	NO	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	OK	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	OK	NO	NO	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
NO	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	NO	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	NO	NO	NO	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	NO	NO	OK	OK	OK	NO	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
OK	OK	OK	OK	OK	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	NO	NO	NO	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
OK	OK	OK	OK	NO	OK	OK	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
OK	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	OK	OK	NO	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
OK	OK	OK	OK	NO	OK	OK	NO	OK	OK	OK	OK	NO	NO	OK	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	OK	NO
NO	OK	OK	NO	NO	OK	NO	NO	NO	OK	OK	NO	NO	NO	NO	OK	NO	OK	OK	OK	OK	OK	OK	OK	OK	NO	OK	NO	NO	NO	NO	NO
NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	OK	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO




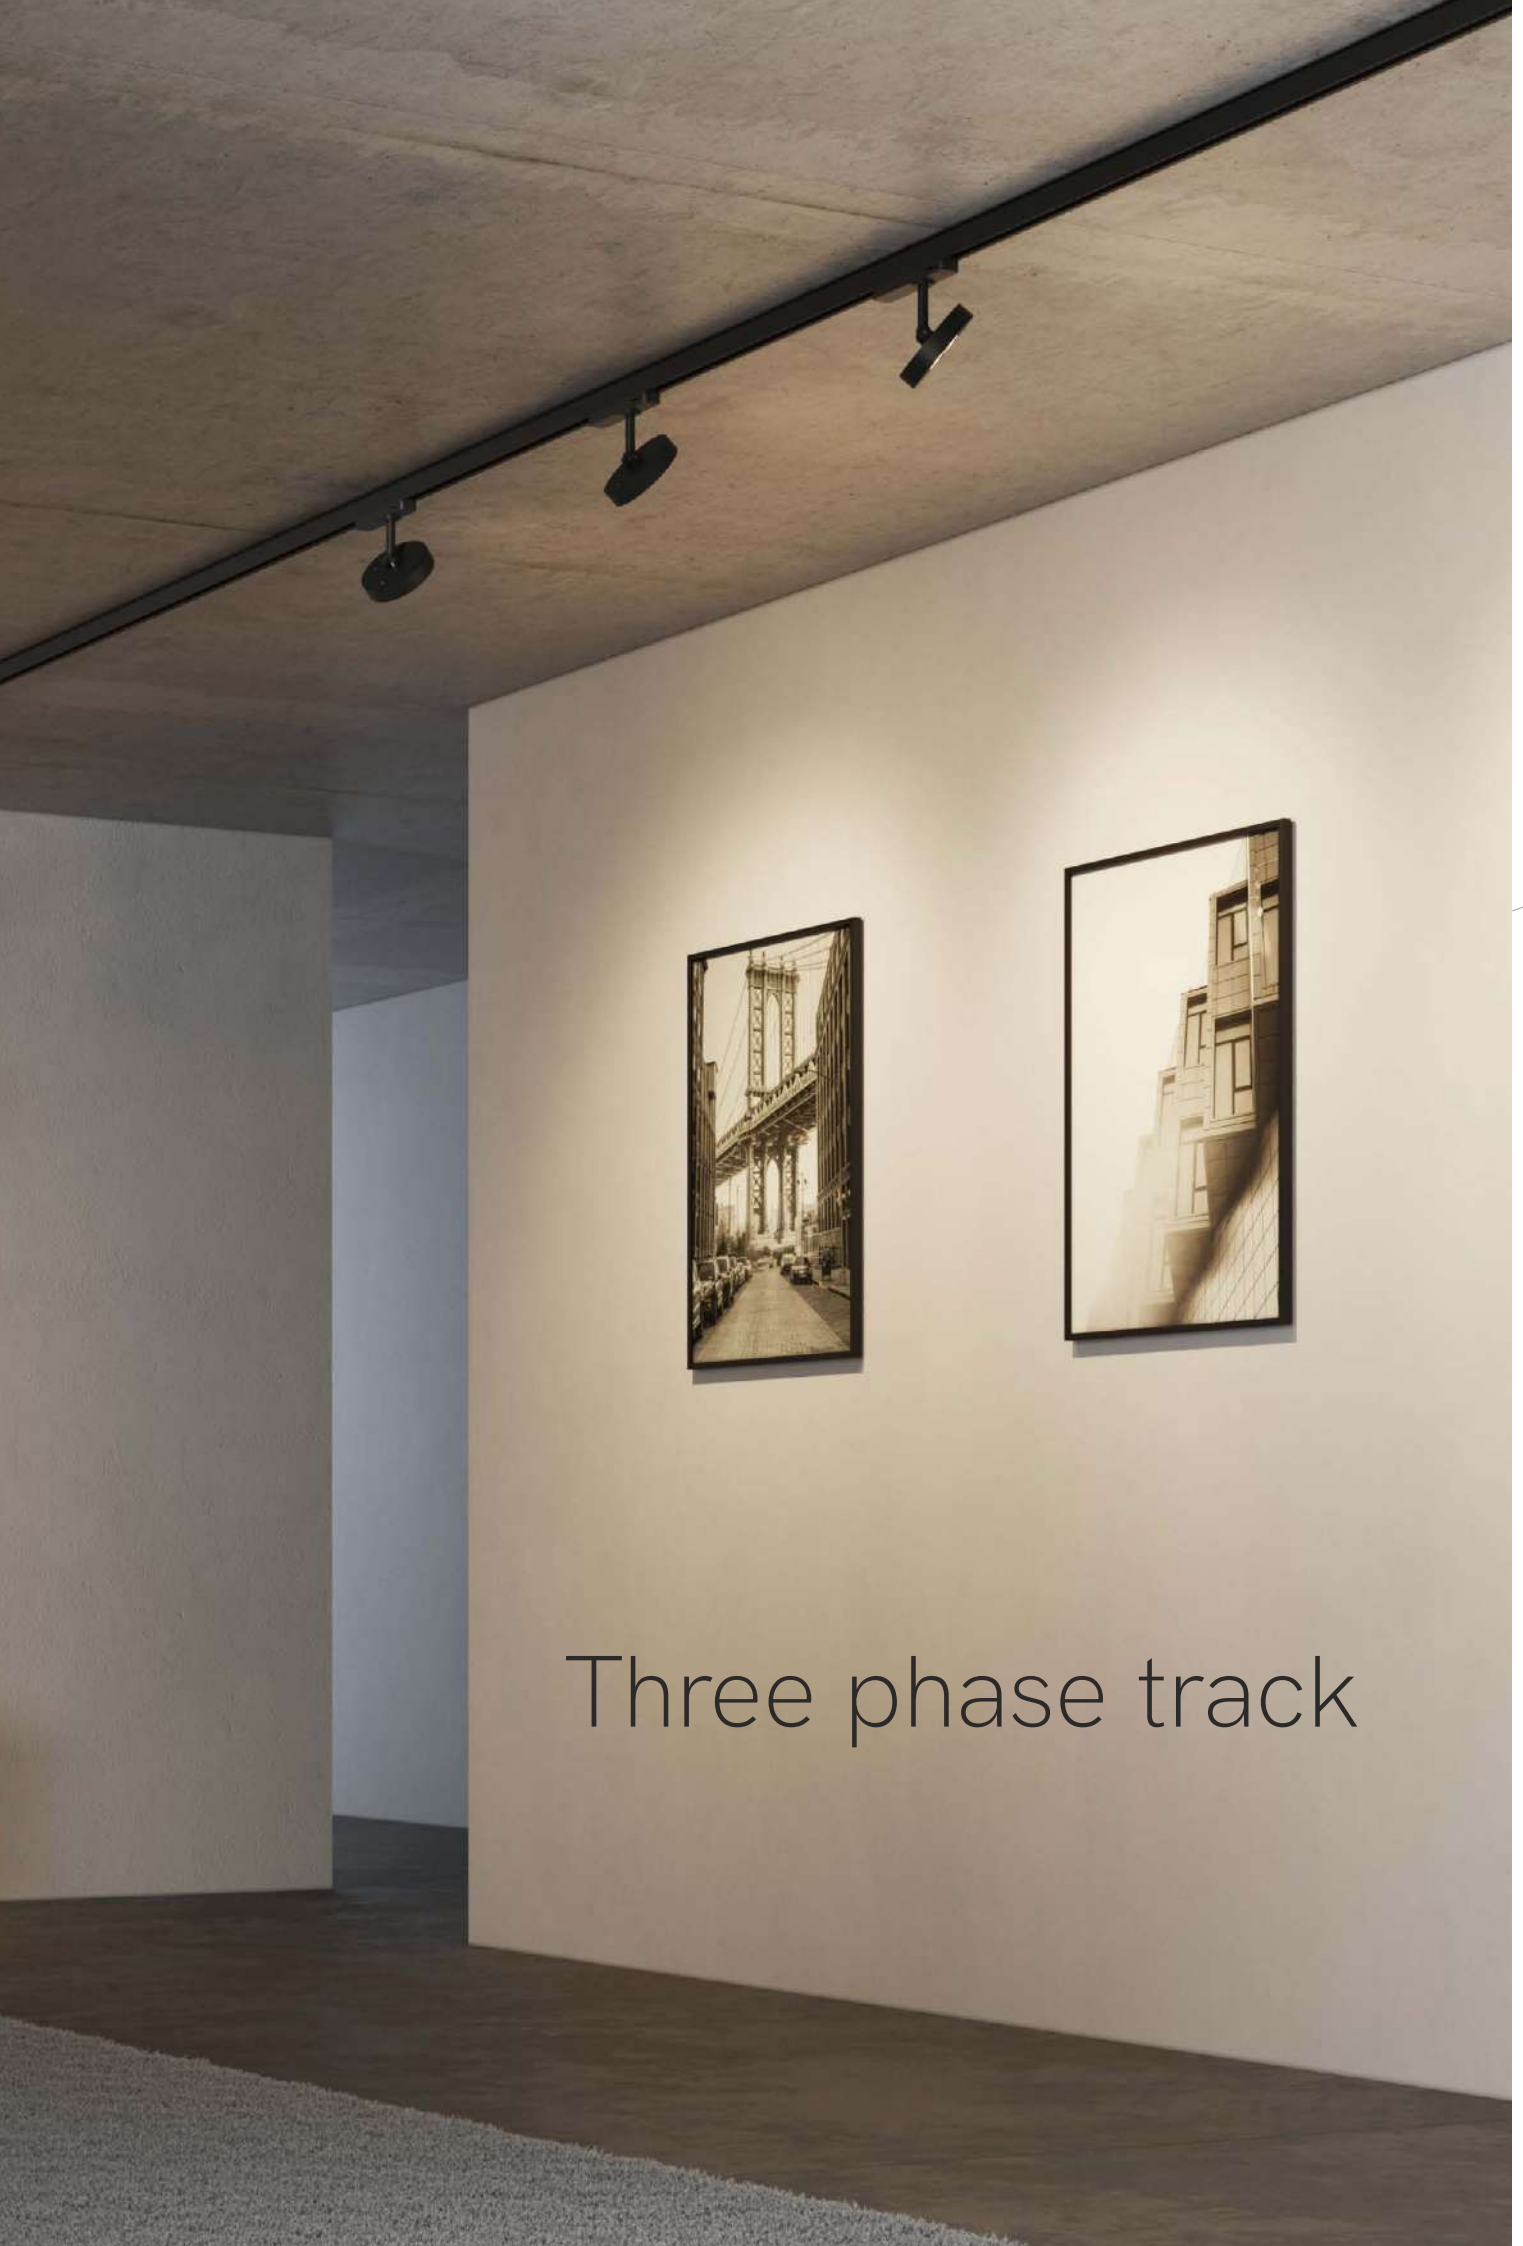

Three phase track

Three phase track surface accessories

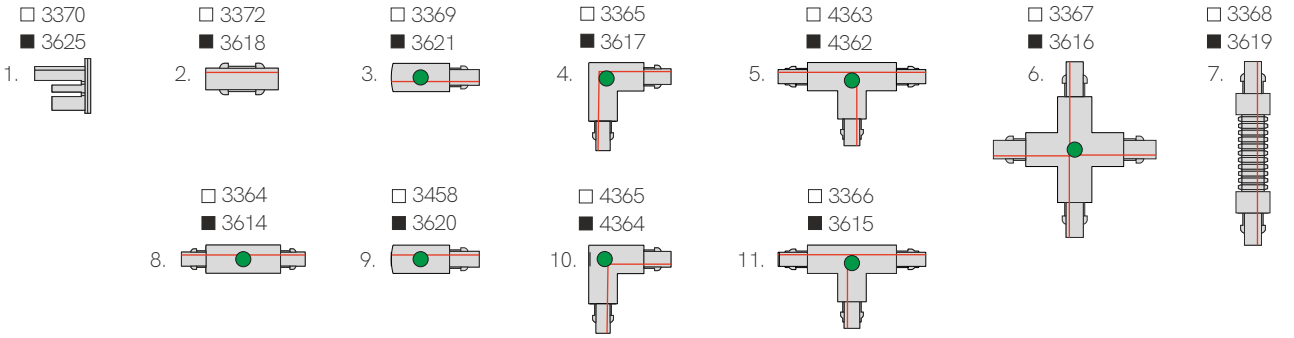

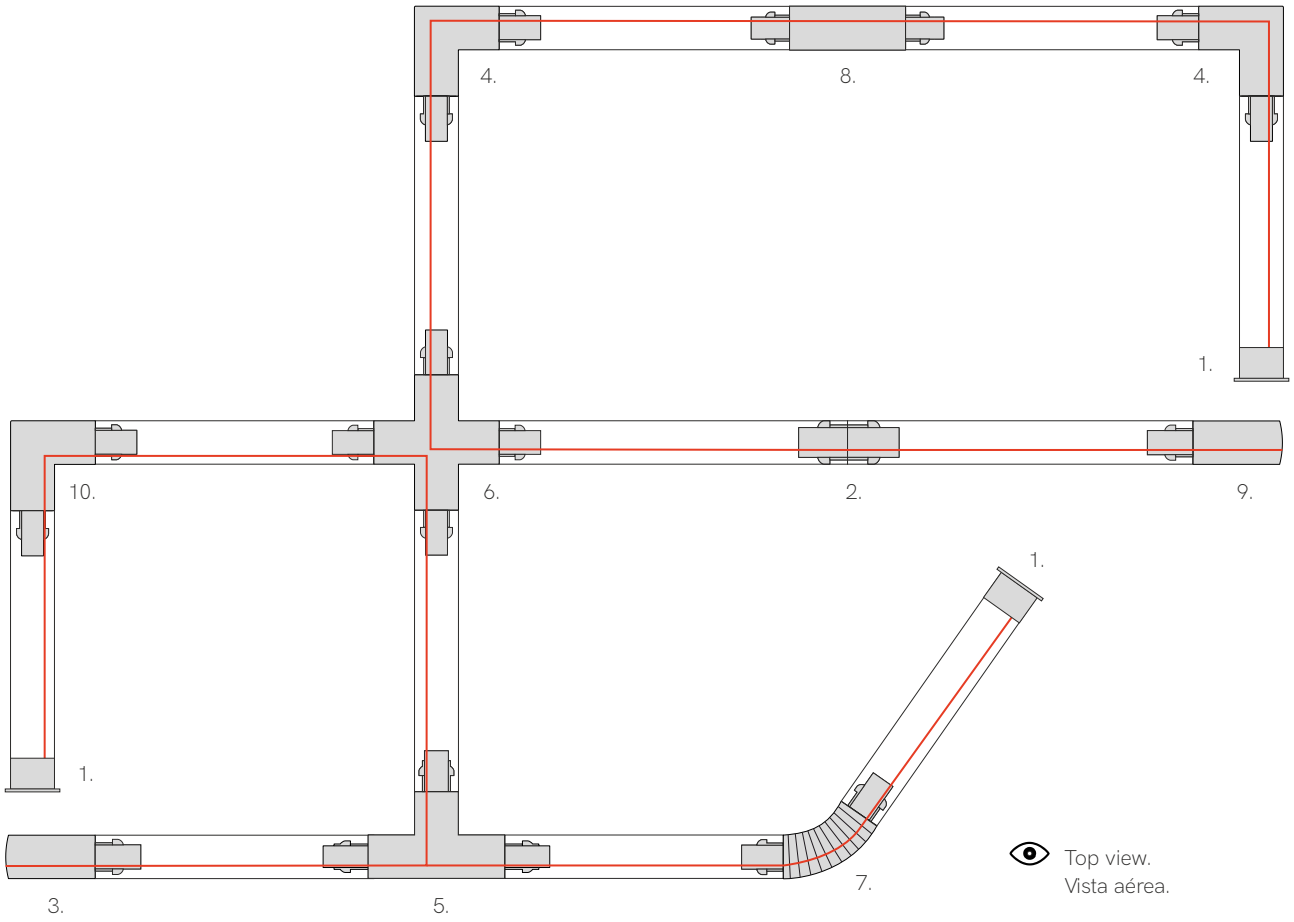

● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

Three phase track surface

W: 32mm H: 31mm

☐	1m	3795
☐	2m	3796
☐	3m	3797
■	1m	D-3626
■	2m	D-3627
■	3m	D-3628



Ceiling fixing 3PH surface

L: 30mm W: 25mm H: 12mm

☐	3373
■	3623



Power supply 3PH surface

L: 98mm W: 32mm H: 32mm

☐	Left	3369
☐	Right	3458
■	Left	3621
■	Right	3620



Linear joint 3PH without spacing

L: 68mm W: 25mm H: 27mm

☐	3372
■	3618



Linear joint 3PH with spacing surface

L: 166mm W: 35mm H: 32mm

☐	3364
■	3614



L joint 3PH surface

L: 100mm W: 66mm H: 32mm

☐	Left	4365
☐	Right	3365
■	Left	4364
■	Right	3617



T joint 3PH surface

L: 166mm W: 100mm H: 32mm

☐	Left	4363
☐	Right	3366
■	Left	4362
■	Right	3615



X joint 3PH surface

L: 166mm W: 166mm H: 32mm

☐	3367
■	3616



Flexible joint 3PH

L: 245mm W: 35mm H: 32mm

☐	3368
■	3619



End cap 3PH

L: 32mm W: 32mm H: 32mm

☐	3370
■	3625



Adapter 3PH

L: 70mm W: 40mm H: 41mm

☐	3371-V2
■	3624-V2



Suspension kit 3PH

L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

☐	3459
■	3622




Surface base 3PH


L: Ø100mm H: 32mm

○	4700
●	4701

Surface Common Base

Three phase track recessed accessories

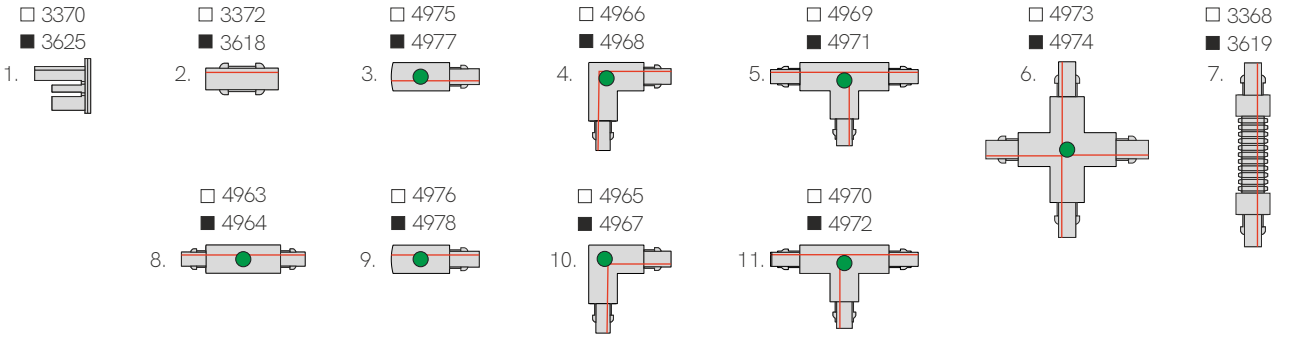

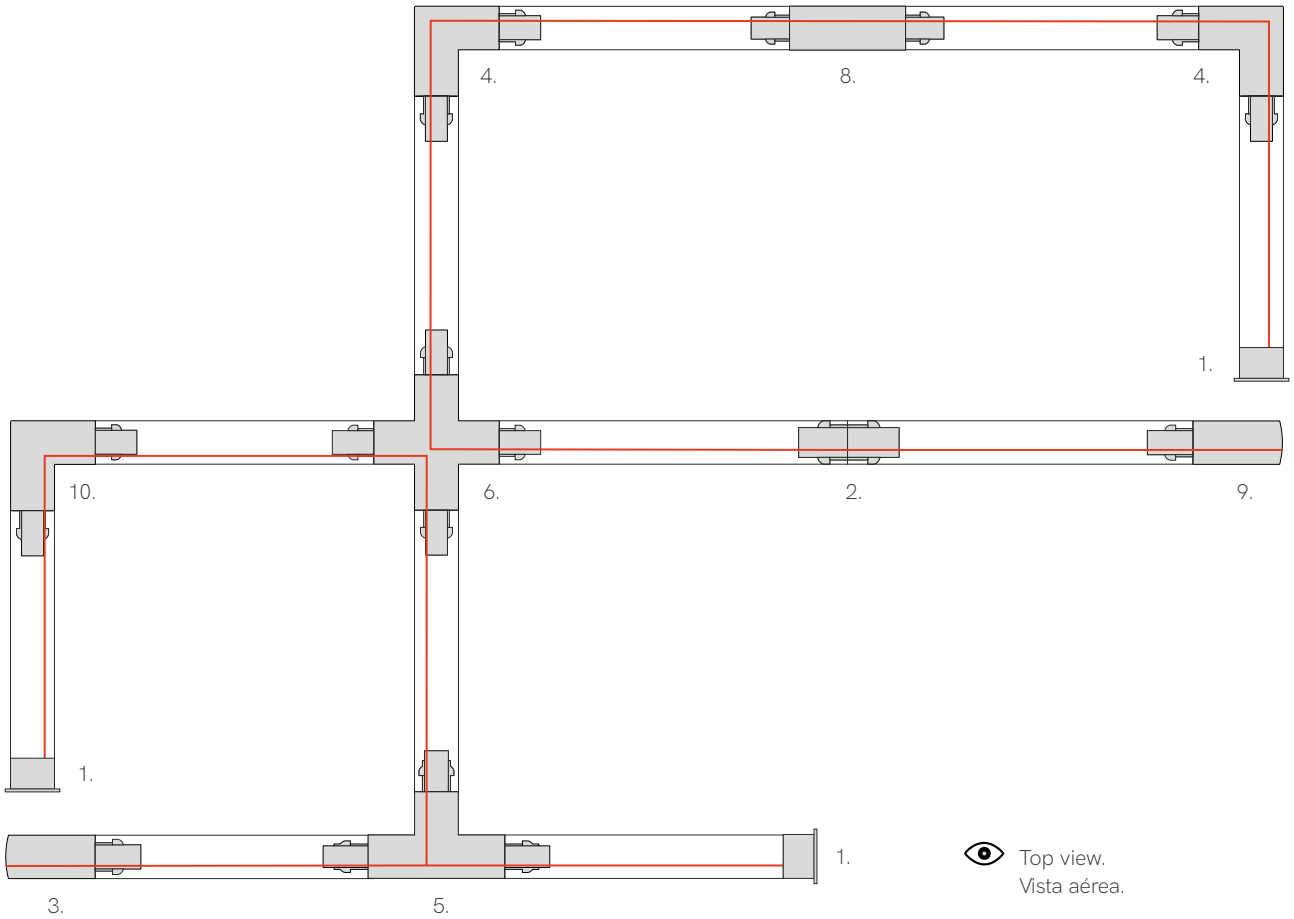

● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

Three phase track recessed
W: 56mm H: 33mm

☐	2m	3897
☐	3m	3898
■	2m	4753
■	3m	4754



Ceiling fixing 3PH recessed
L: 64mm W: 25mm H: 32mm

▩	3805	



Power supply 3PH recessed
L: 98mm W: 56,5mm H: 33,7mm

☐	Left	4975
☐	Right	4976
■	Left	4977
■	Right	4978



Linear joint 3PH without spacing
L: 68mm W: 25mm H: 27mm

☐	3372	
■	3618	



Linear joint 3PH with spacing recessed
L: 166mm W: 56,5mm H: 33,7mm

☐	4963	
■	4964	



Flexible joint 3PH
L: 245mm W: 35mm H: 32mm

☐	3368	
■	3619	




L joint 3PH recessed
L: 111mm W: 111mm H: 33,7mm

☐	Left	4965
☐	Right	4966
■	Left	4967
■	Right	4968



T joint 3PH recessed
L: 166mm W: 111mm H: 33,7mm

☐	Left	4969
☐	Right	4970
■	Left	4971
■	Right	4972



X joint 3PH recessed
L: 166mm W: 166mm H: 33,7mm

☐	4973	
■	4974	



End cap 3PH
L: 32mm W: 32mm H: 32mm

☐	3370	
■	3625	



Adapter 3PH
L: 70mm W: 40mm H: 41mm

☐	3371-V2	
■	3624-V2	



Recessed base 3PH
L: Ø130mm H: 60mm Ø110mm

○	3851	
●	3852	

*Need Three Phase Surface Base (4700 or 4701) to put inside.


Recessed Common Base



Härko Luxury Beds, Barcelona (Spain).

Picolo 3PH





Technical Information

Power	9,5W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4437
	● 4438
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.
*Surface and recessed base included with Picolo base.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.


Picolo GU10 3PH





Picolo AR111 3PH





Technical Information

	Picolo GU10 3PH	Picolo AR111 3PH
Installation	Three Phase Track	Three Phase Track
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 3990-V3	○ 4435
	● 3989-V3	ⓘ Custom RAL
	ⓘ Custom RAL	
	3 YEARS WARRANTY | 1/20	5 YEARS WARRANTY | 1/40

ⓘ Consult delivery terms and conditions.

Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS


*GU10 bulbholder included.

IP 20 | 220/240 VAC |



Cookie 3PH





Technical Information

Power	12W
Installation	Threee Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 5179
	● 5180

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20




Zoom 3PH



Power and CTT switch





Technical Information

Power	Switch 15W / 20W / 25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code		
	○	4900
	●	4901

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° - 55° | 50/60 Hz | IK06 | +45°C -20°C | CCT SWITCH | POWER SWITCH | 1/10



Óptica Rapp , La Laguna. Tenerife (Spain). Design: Grupo Globarq. Photography: Kuo estudio.


Aston 3PH





Konic 3PH





Technical Information

	Aston 3PH	Konic 3PH
Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	2.440 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 4439	○ 4985-N
	● 4440	● 4986-N
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥80	CRI ≥94 | TRIAC DIMM

CE RoHS


ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 38° 60° | 50/60 Hz | +40°C -15°C | CCT SWITCH | 1/8



Mini Tram 3PH









Tram 3PH







Technical Information

Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	2.320 lm / 2.400 lm	3.520 lm / 3.600 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	☐	3.000K	4427	☐	3.000K	4541
	☐	4.000K	4428	☐	4.000K	4542
	■	3.000K	4429	■	3.000K	4543
	■	4.000K	4430	■	4.000K	4544
			5 YEARS WARRANTY			3 YEARS WARRANTY


CE RoHS

30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +45°C -20°C | 1/10




Kom 3PH 20W






Kom 3PH 30W





Kom 3PH 40W





Technical Information


	Kom 3PH 20W	Kom 3PH 30W	Kom 3PH 40W
Power	20W	30W	40W
Installation	Three Phase Track	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	2.300 lm	2.470 lm	4.500 lm / 4.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code			
	☐ 4337	☐ 4336-N	☐ 3.000K 4444
	■ 4339	■ 4338-N	☐ 4.000K 4445
	ⓘ Custom RAL	ⓘ Custom RAL	■ 3.000K 4447
			■ 4.000K 4448
			ⓘ Custom RAL
	CRI ≥80 | CCT SWITCH	CRI ≥94 | CCT SWITCH	CRI ≥80

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | 1/10

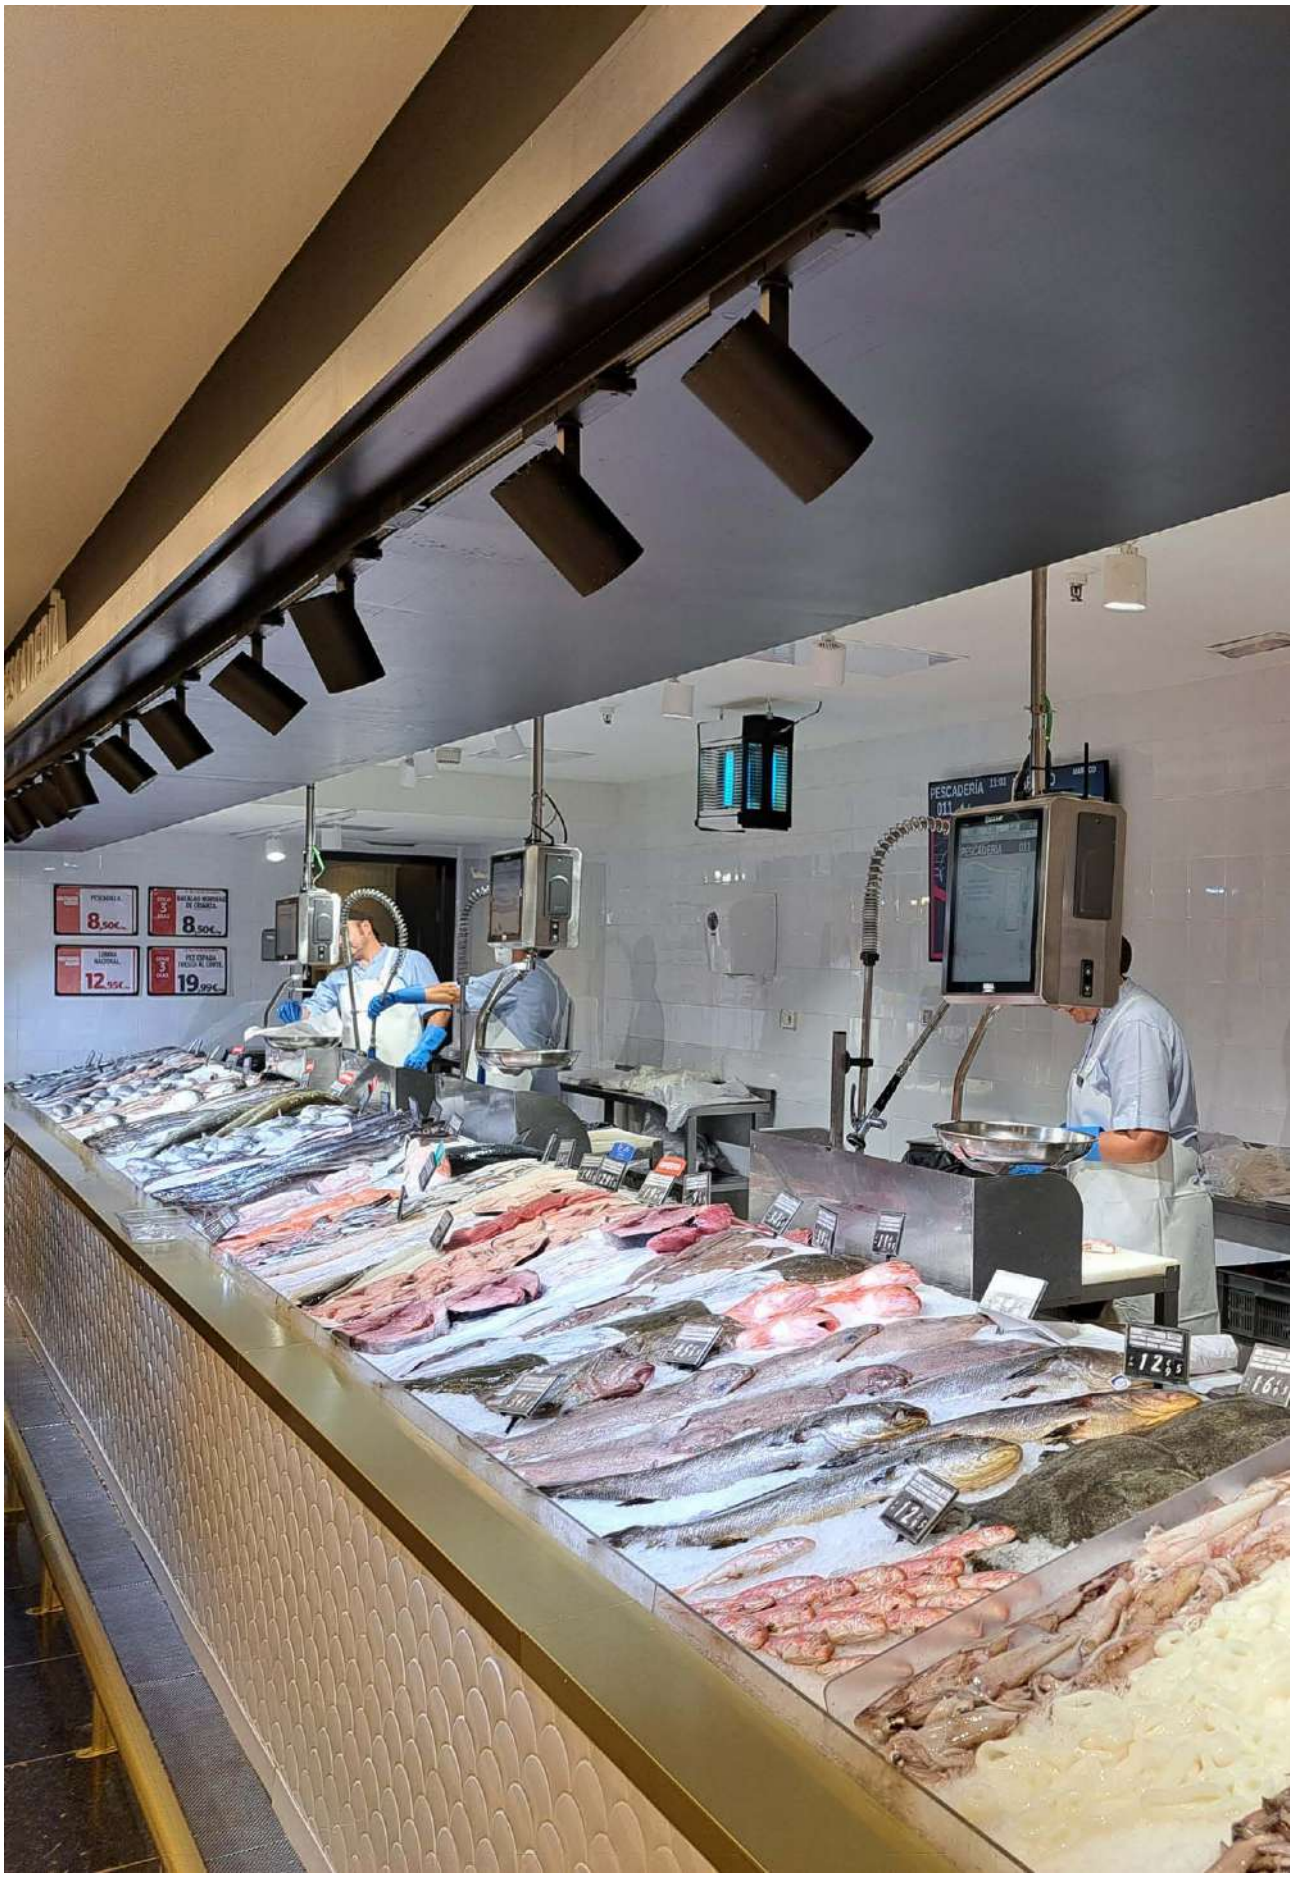
PESCADERÍA
8,50€
8,50€
12,95€
19,99€

Lonja 3PH





Technical Information

Power	22W
Lumens	1.628 lm - 2.662 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code	
Code	3

Diffuser (Angle)	
Transparent (15°)	1
Transparent (24°)	6
Transparent (36°)	8

Size	
	9

CCT (Lm)	
FISH - 5.500K 2.662 lm	1
3.000K 2.100 lm	3
4.000K 2.206 lm	4
MEAT R - 1.950K 1.650 lm	5
FRUIT - 2.700K 2.310 lm	6
WINE/CHEESE - 2.700K 2.464 lm	7
BREAD - 2.400K 2.464 lm	8
MEAT M - 3.500K 1.628 lm	9

Driver	
On/Off	1
Triac	4


Colour	
White	1
Black	2
Custom RAL	

Code: 3 9

*Create your code acording to your preferences.

Consult delivery terms and conditions.

Accessories



Honeycomb anti-glare

● 40111


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 3.000K 4.000K | 15° 24° 36° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1



Crown 3PH





Technical Information

Power	25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 5221
	● 5222


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



Alfa 3PH





Technical Information

Power	32W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	3.100 lm / 3.200 lm / 3.250 lm
Material	Aluminium
Finishes	White / Black

Code			
	☐	2.700K	4038
	☐	3.000K	4039
	☐	4.000K	4040
	■	2.700K	4176
	■	3.000K	4177
	■	4.000K	4178


CE RoHS

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -10°C | AKZO NOBEL | 1/10



Lena 3PH



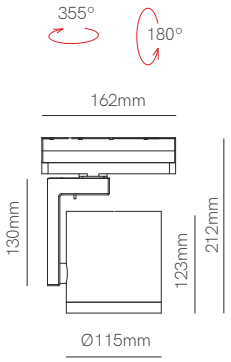

Technical Information

Power	35W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	4.200 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4449-V2
	● 4450-V2
ⓘ	Custom RAL


CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8






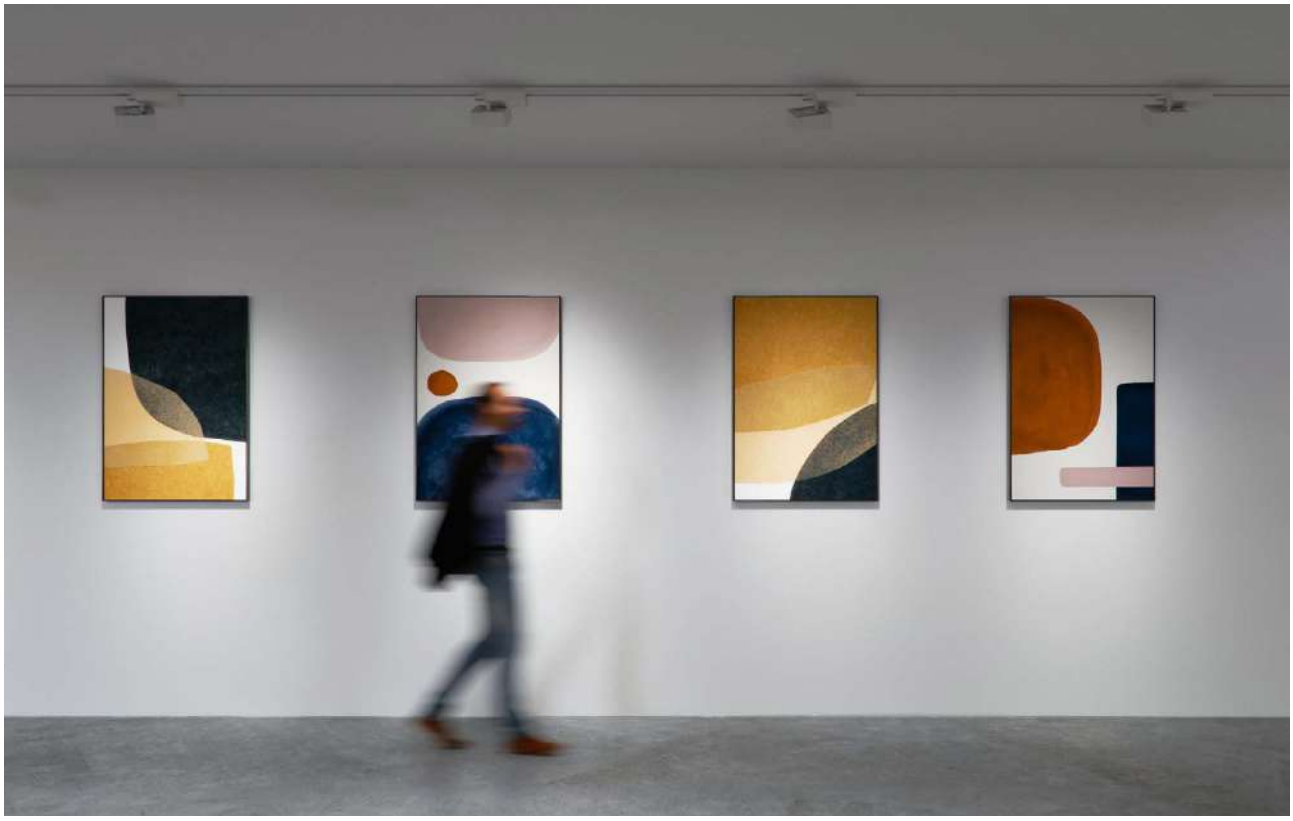


Sono 3PH



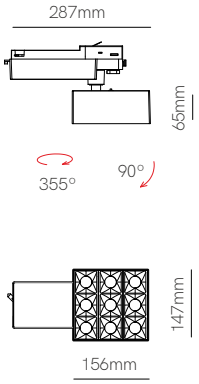

Sono XL 3PH



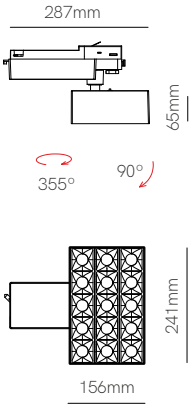

*Need Tuya Smart App to work.

Technical Information

	Sono 3PH	Sono XL 3PH
Power	40W	60W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.130 lm	4.390 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black

Code		
	☐ 4946	☐ 4950
	■ 4947	■ 4951
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
☐ 4956

CE RoHS

*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥98 | 30° | 50/60 Hz | IK06 | +45°C -15°C | tuya | 1/4




▶ VIDEO



Magnet track mini



Magnet track 48V mini

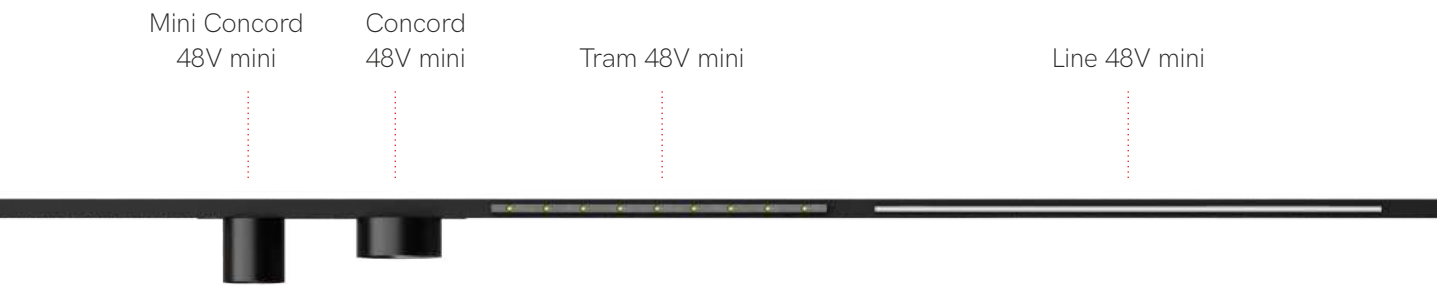

Beneito Faure introduces the new mini magnetic track, developed to offer a punctual and decorative lighting in interior rooms. Its small size design makes it an ideal solution for domestic and decorative environments that need to highlight specific elements without interfering with the design of the space. The new collection includes a wide variety of products that are integrated into the track and switch on by magnetization on contact, guaranteeing a focused light emission at short angles, ideal for projects that require maximum precision.

Beneito Faure presenta el nuevo carril magnético mini, desarrollado para ofrecer una iluminación puntual y decorativa en estancias interiores. Su diseño de tamaño reducido lo convierte en una solución idónea para entornos domésticos y decorativos que necesitan resaltar elementos específicos sin interferir en el diseño del espacio.
La nueva colección incluye una amplia variedad de productos que se integran en el carril y se encienden por imantación al contactarlo, garantizando una emisión de luz focalizada con ángulos cortos, ideal para proyectos que exigen máxima precisión.

Magnet track mini accessories

☐ 5586
■ 5587
1.




☐ 5590
■ 5591
2.



☐ 5594
■ 5595
3.



☐ 5606
■ 5607
4.



☐ 5596
■ 5597
5.



☐ 5608
■ 5609
6.




☐ 5598
■ 5599
7.




☐ 5610
■ 5611
8.



☐ 5600
■ 5601
9.




☐ 5612
■ 5613
10.



☐ 5602
■ 5603
11.




☐ 5614
■ 5615
12.



☐ 5588
■ 5589
13.




☐ 5592
■ 5593
14.



☐ 5604
■ 5605
15.



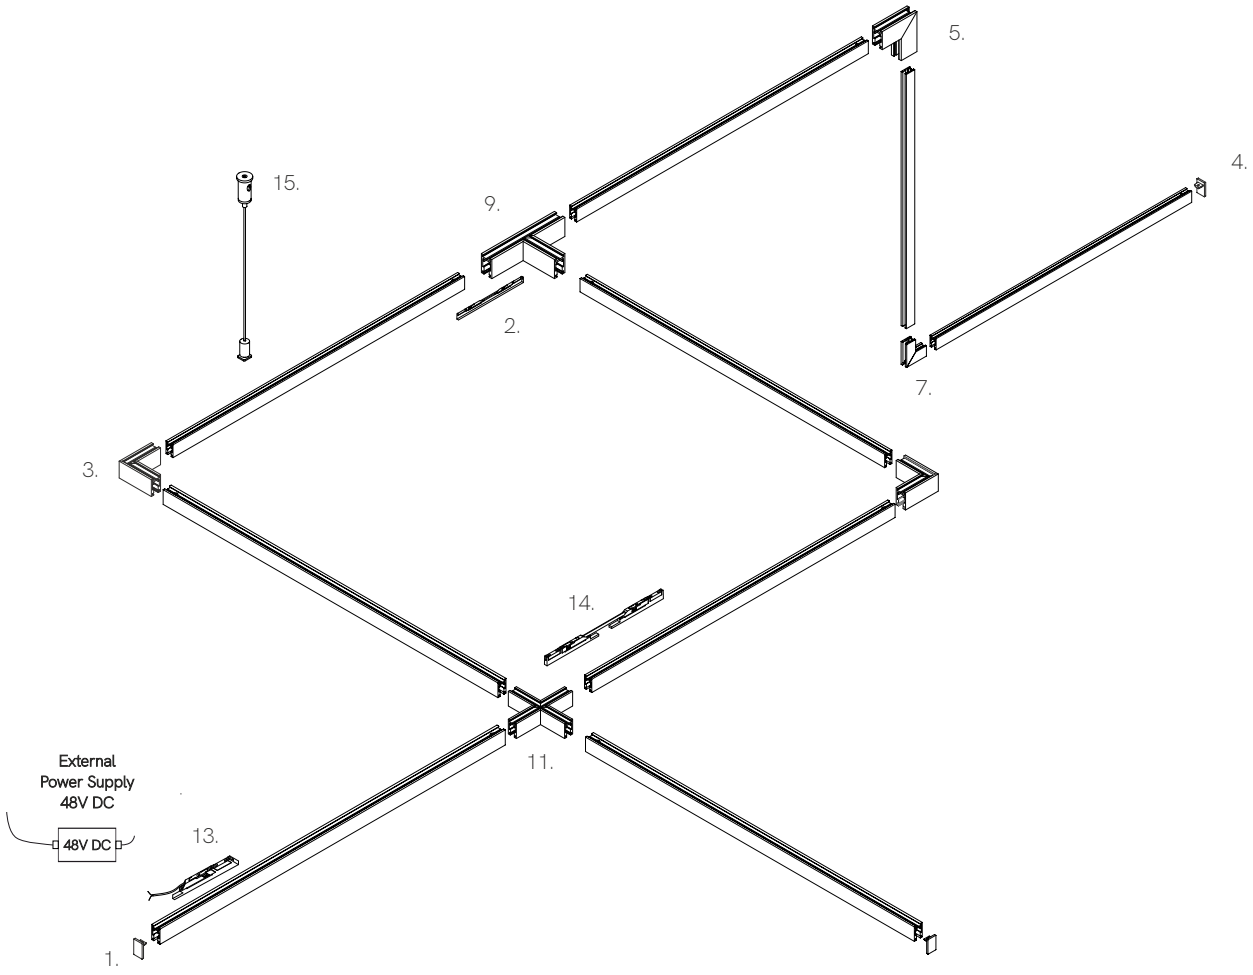

CE RoHS EMC

3 YEARS WARRANTY | IP 20 |



Magnet track mini surface
W: 16mm H: 22mm

☐	2m	5578
☐	3m	5579
■	2m	5580
■	3m	5581



Magnet track mini recessed
W: 35mm x H: 16mm

☐	2m	5582
☐	3m	5583
■	2m	5584
■	3m	5585



L joint ceiling surface
L: 42mm W: 42mm H: 19mm

☐	5594
■	5595



L joint ceiling recessed
L: 35mm W: 35mm H: 16mm

☐	5606
■	5607



L joint wall ceiling outer surface
L: 42mm W: 42mm H: 12mm

☐	5596
■	5597



L joint wall ceiling outer recessed
L: 42mm W: 35mm H: 42mm

☐	5608
■	5609



L joint wall ceiling inner surface
L: 42mm W: 42mm H: 12mm

☐	5598
■	5599



L joint wall ceiling inner recessed
L: 42mm W: 35mm H: 42mm

☐	5610
■	5611



T joint ceiling surface
L: 84mm W: 48mm H: 19mm

☐	5600
■	5601



T joint ceiling recessed
L: 84mm W: 52mm H: 16mm

☐	5612
■	5613



X joint ceiling surface
L: 84mm W: 84mm H: 19mm

☐	5602
■	5603



X joint ceiling recessed
L: 84mm W: 84mm H: 16mm

☐	5614
■	5615



End cap surface / recessed
L: 10mm W: 11mm H: 17mm

☐	5586
■	5587



Linear joint
L: 200mm W: 5mm H: 14mm

☐	5590
■	5591



Start connector
L: 100mm W: 5mm H: 14mm

☐	5588
■	5589




Suspension kit
L: 2.000mm W: 15mm

☐	5604
■	5605



Central corner connector
L: 225mm W: 5mm H: 14mm


☐	5592
■	5593

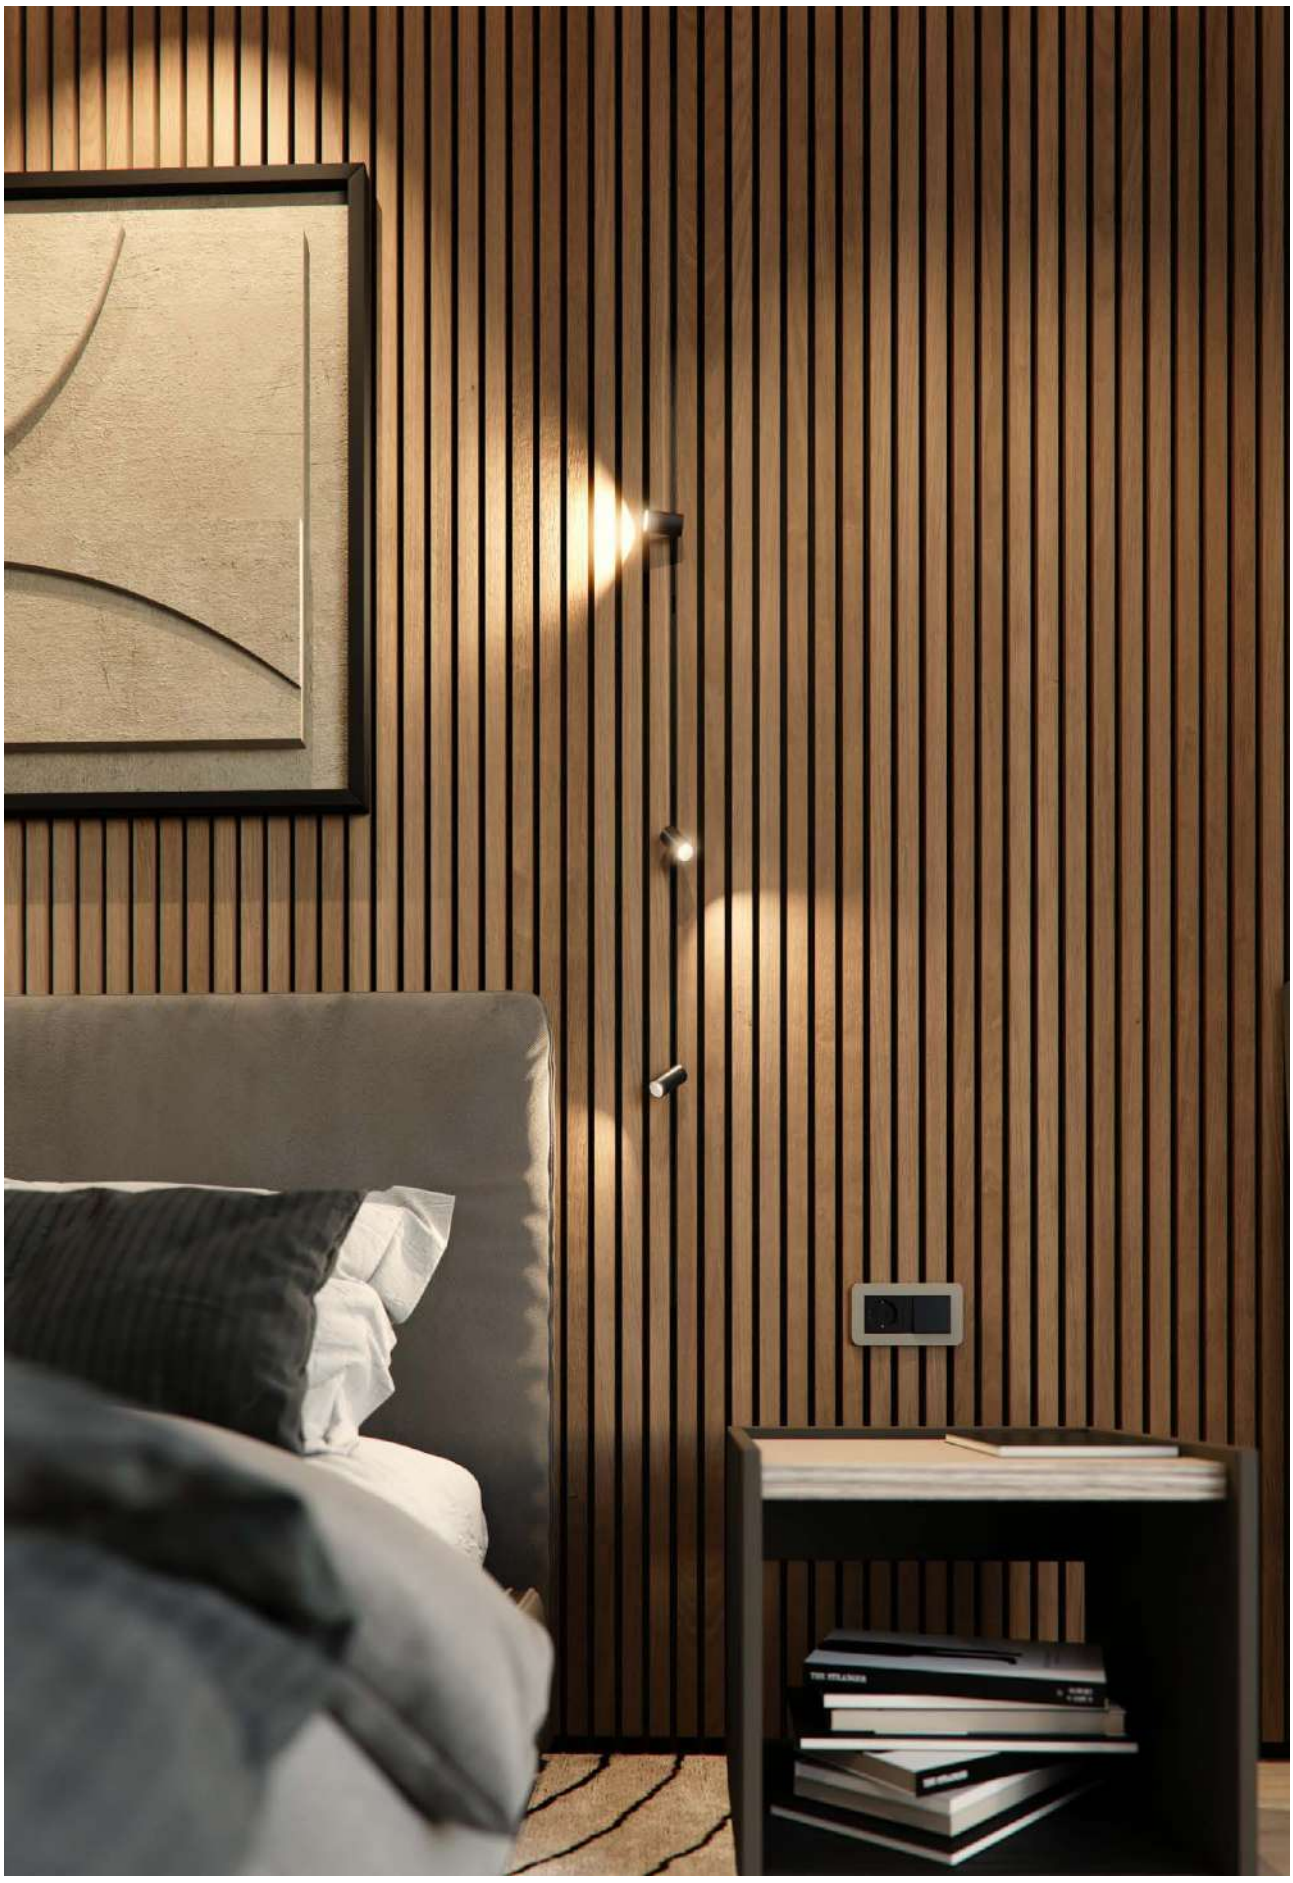

New


Mini Picolo 48V mini





Picolo 48V mini





*Need power supply (page 366).


Technical Information

Power	6W	10W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	440 lm / 475 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5628	○	2.700K	5632
	○	3.000K	5629	○	3.000K	5633
	●	2.700K	5630	●	2.700K	5634
	●	3.000K	5631	●	3.000K	5635
			1/48			1/36

CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C

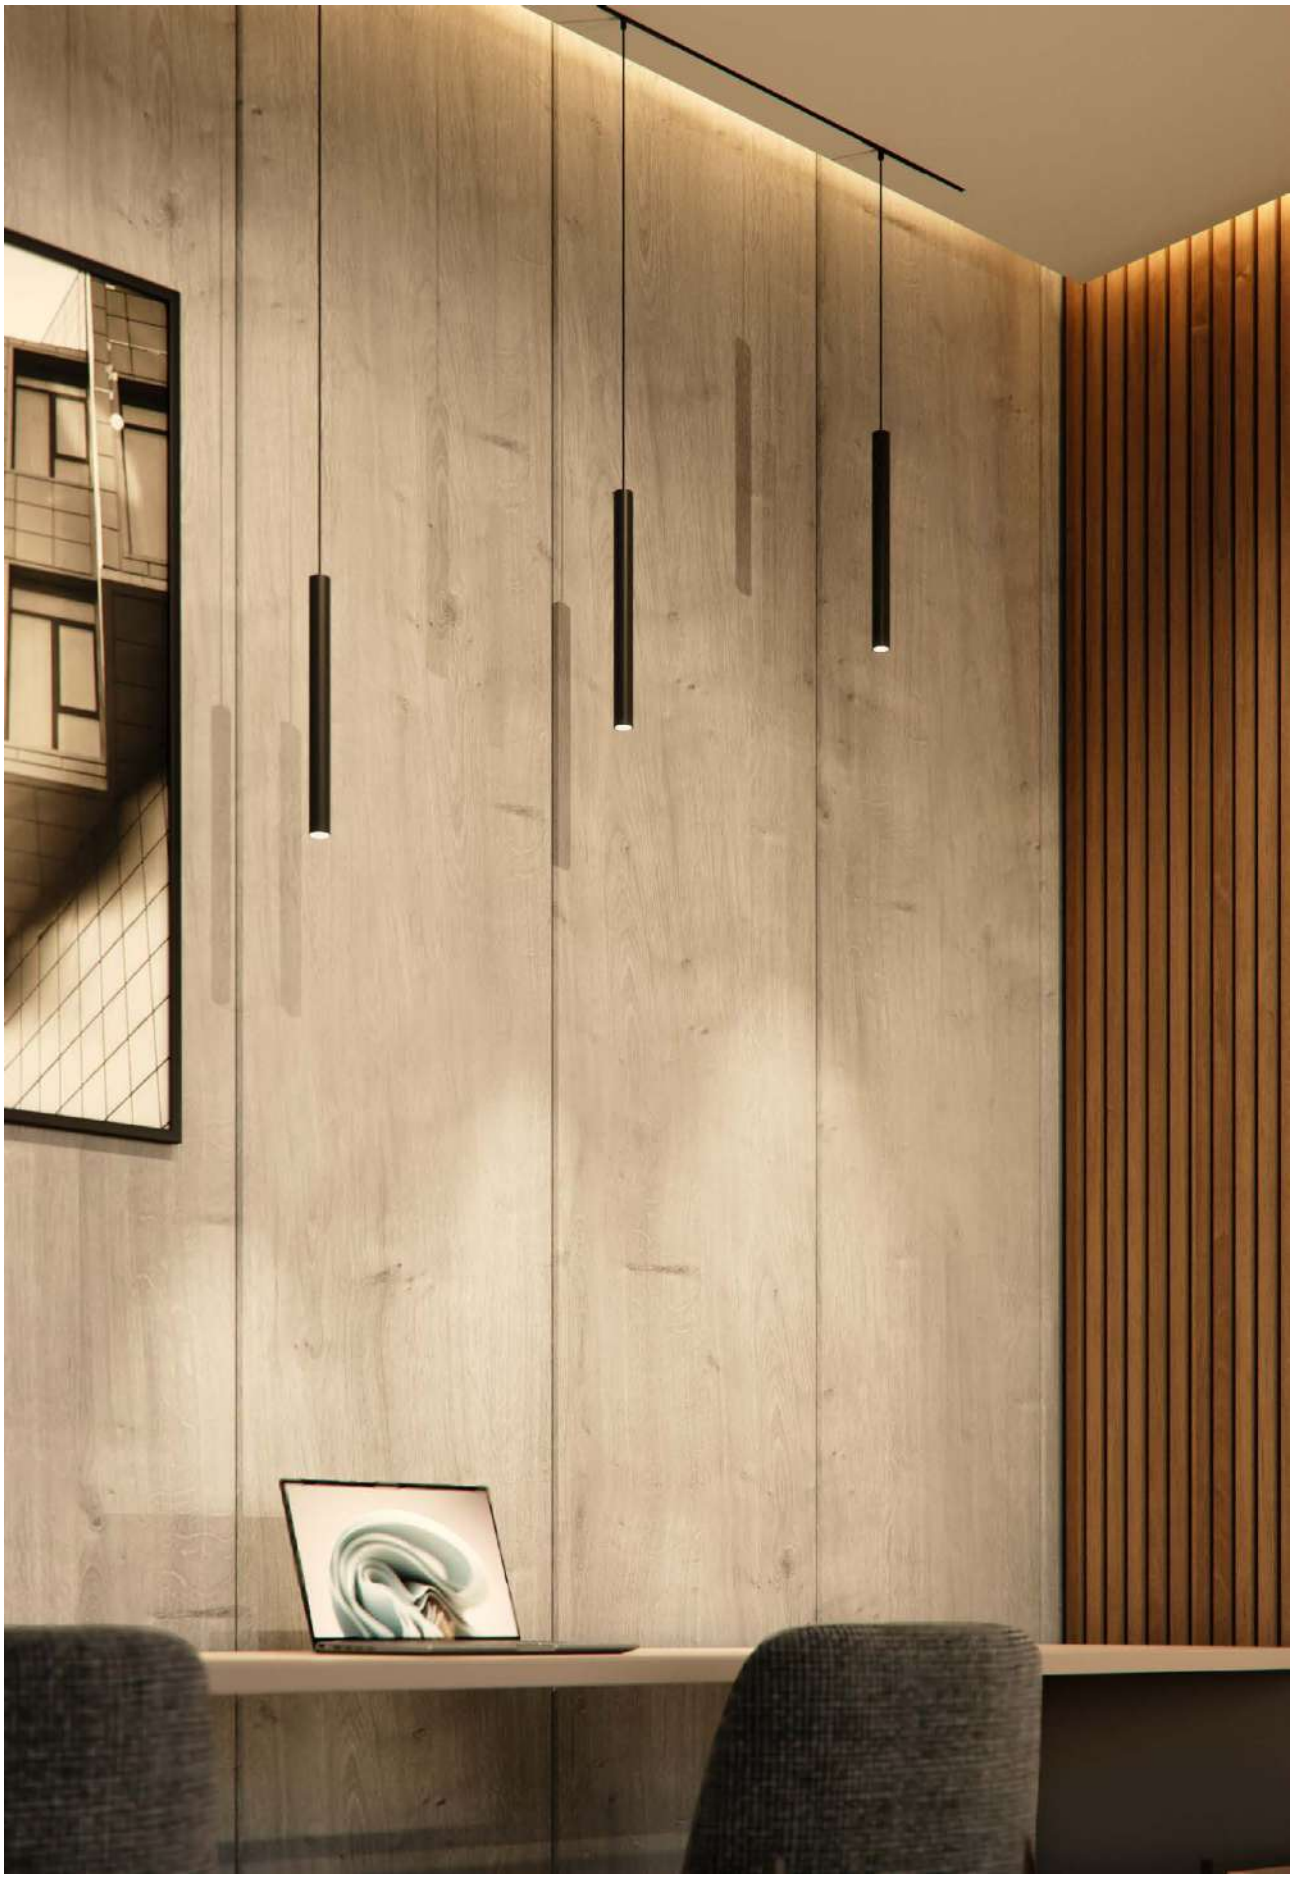

New

Atmos slim 48V mini



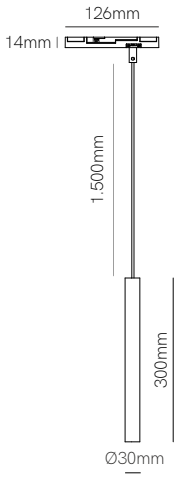

*Need power supply (page 366).

Technical Information

Power	6W
Installation	Magnet track mini
Color Temperature	2.700K / 3.000K
Lumens	380 lm / 415 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5636
	○	3.000K	5637
	●	2.700K	5638
	●	3.000K	5639

CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C | 1/24



New


Zoe 48V mini





Zoe 48V mini suspension



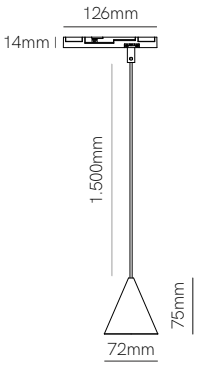

*Need power supply (page 366).

Technical Information

Power	6W	6W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	375 lm / 410 lm	375 lm / 410 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5644	○	2.700K	5640
	○	3.000K	5645	○	3.000K	5641
	●	2.700K	5646	●	2.700K	5642
	●	3.000K	5647	●	3.000K	5643

CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C | 1/36




New


Sphere 48V mini





Sphere 48V mini suspension

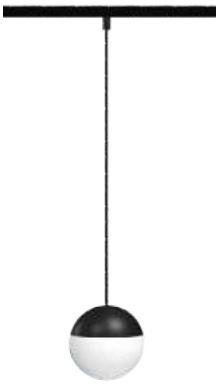

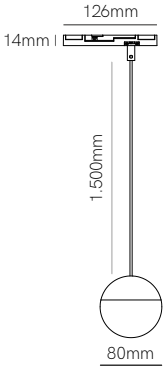

*Need power supply (page 366).

Technical Information

Power	7W	7W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	380 lm / 415 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5660	○	2.700K	5656
	○	3.000K	5661	○	3.000K	5657
	●	2.700K	5662	●	2.700K	5658
	●	3.000K	5663	●	3.000K	5659

CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C | 1/36


Locker
Room

New


Mini Concord 48V mini





Concord 48V mini






*Need power supply (page 366).

Technical Information

	Mini Concord 48V mini	Concord 48V mini
Power	8W	10W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 315 lm	490 lm / 530 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5652	○	2.700K	5648
	○	3.000K	5653	○	3.000K	5649
	●	2.700K	5654	●	2.700K	5650
	●	3.000K	5655	●	3.000K	5651
			1/36			1/24

Accessories



Honeycomb anti-glare
(Included)


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C



the princesssaves herself
INTERNATIONAL LAW
Aleksandra & Michael Miszczynski
PHOTOGRAPHS BY FRANCOIS HALARD
the witch doesn't burn
THE LAW OF NATIONS
JAMES JOYCE
WIVES AND DAUGHTERS
THE MOUNTAIN IS YOU

New


Tram 48V mini

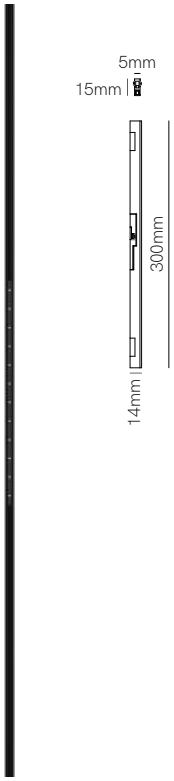

Mini Line 48V mini

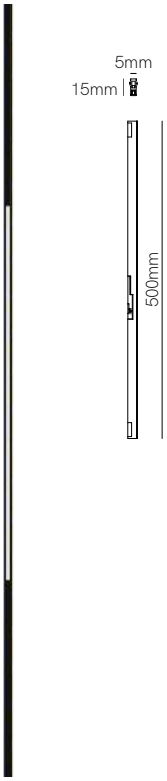

Line 48V mini

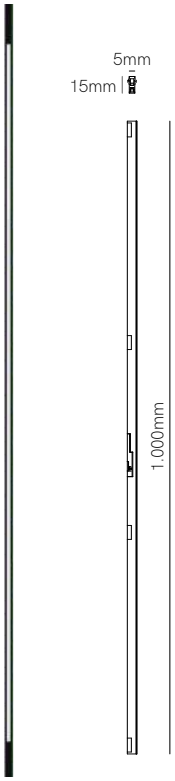

Tram 48V mini

Line 48V mini

*Need power supply (page 366).

Technical Information

	Tram 48V mini	Mini Line 48V mini	Line 48V mini
Power	8W	8W	16W
Installation	Magnet track mini	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	545 lm / 605 lm	300 lm / 325 lm	600 lm / 650 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code								
	○	2.700K	5624	○	2.700K	5616	○	2.700K	5620
	○	3.000K	5625	○	3.000K	5617	○	3.000K	5621
	●	2.700K	5626	●	2.700K	5618	●	2.700K	5622
	●	3.000K	5627	●	3.000K	5619	●	3.000K	5623
	65° | 1/60						100° | 1/36		

CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C






Magnet track

Tram 48V
Line 48V
Sphere 48V
Sphere 48V suspension
Diro 48V
Fine 25 circle 48V
Dot 48V
Hat 48V suspension
New
Mini Hat 48V suspension

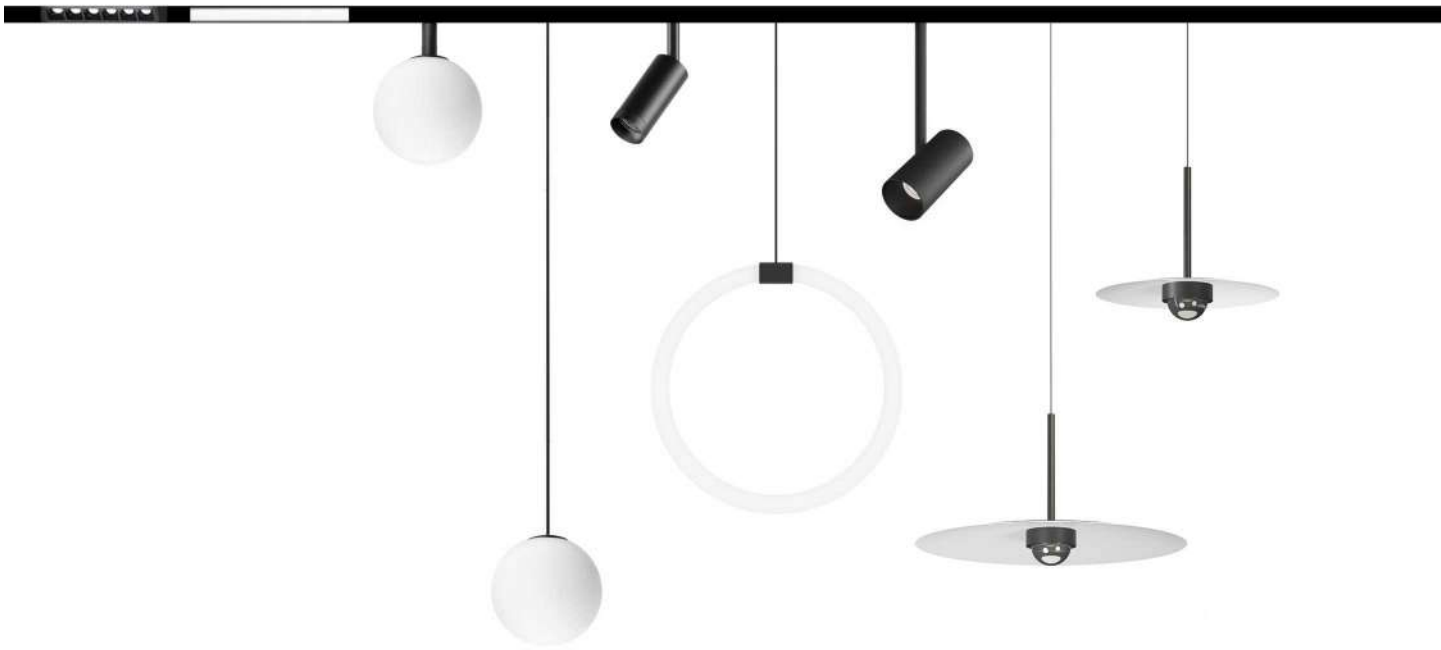

Curve Tram 48V
Curve Line 48V



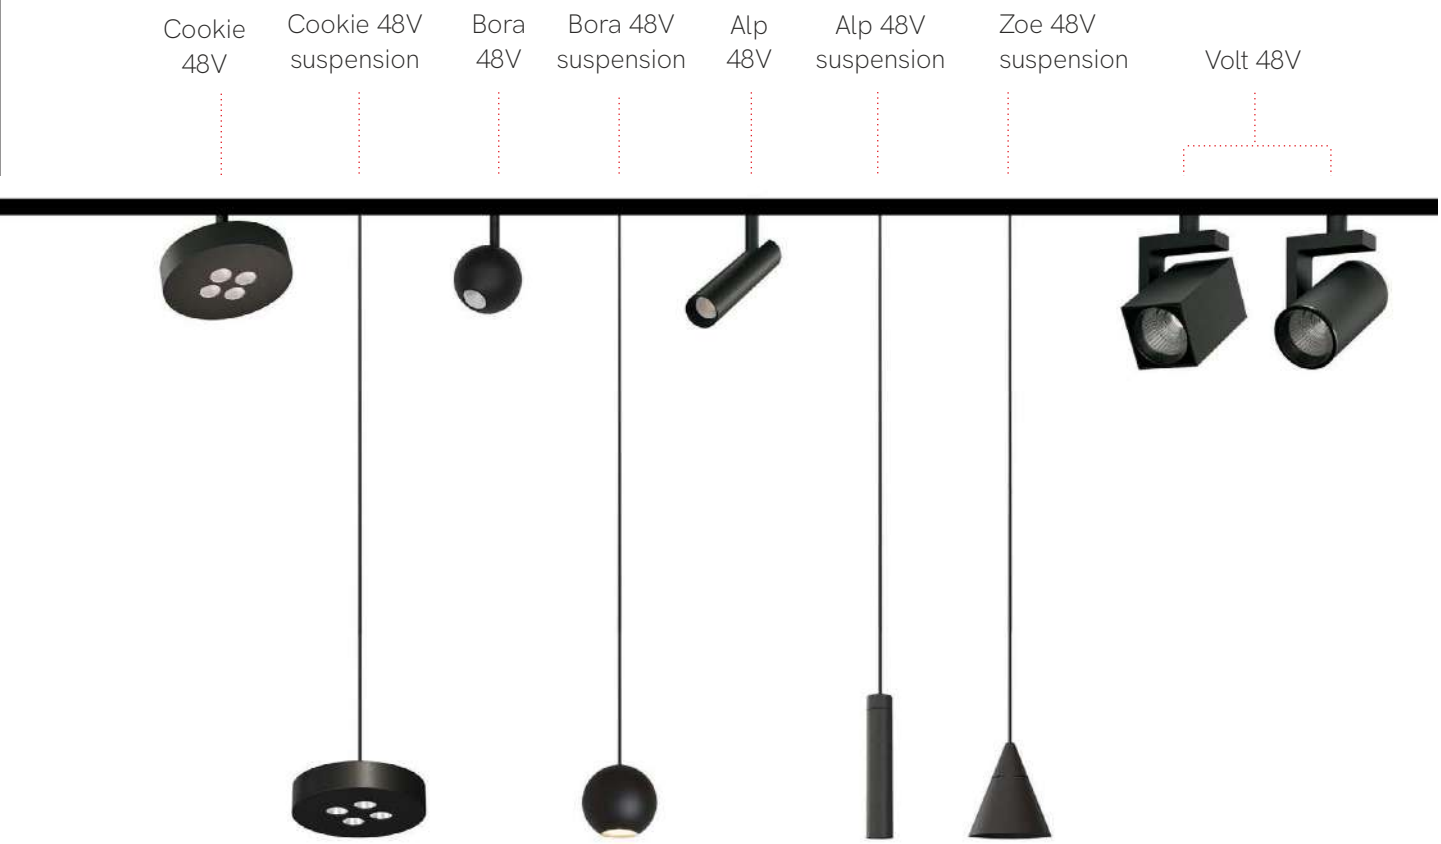


Magnet track 48V

Beneito Faure expands the collection for magnetic track and incorporates the mini Hat, a current trend in decorative lighting.
Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora mini Hat, tendencia actual en iluminación decorativa.
Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.

Magnet track accessories

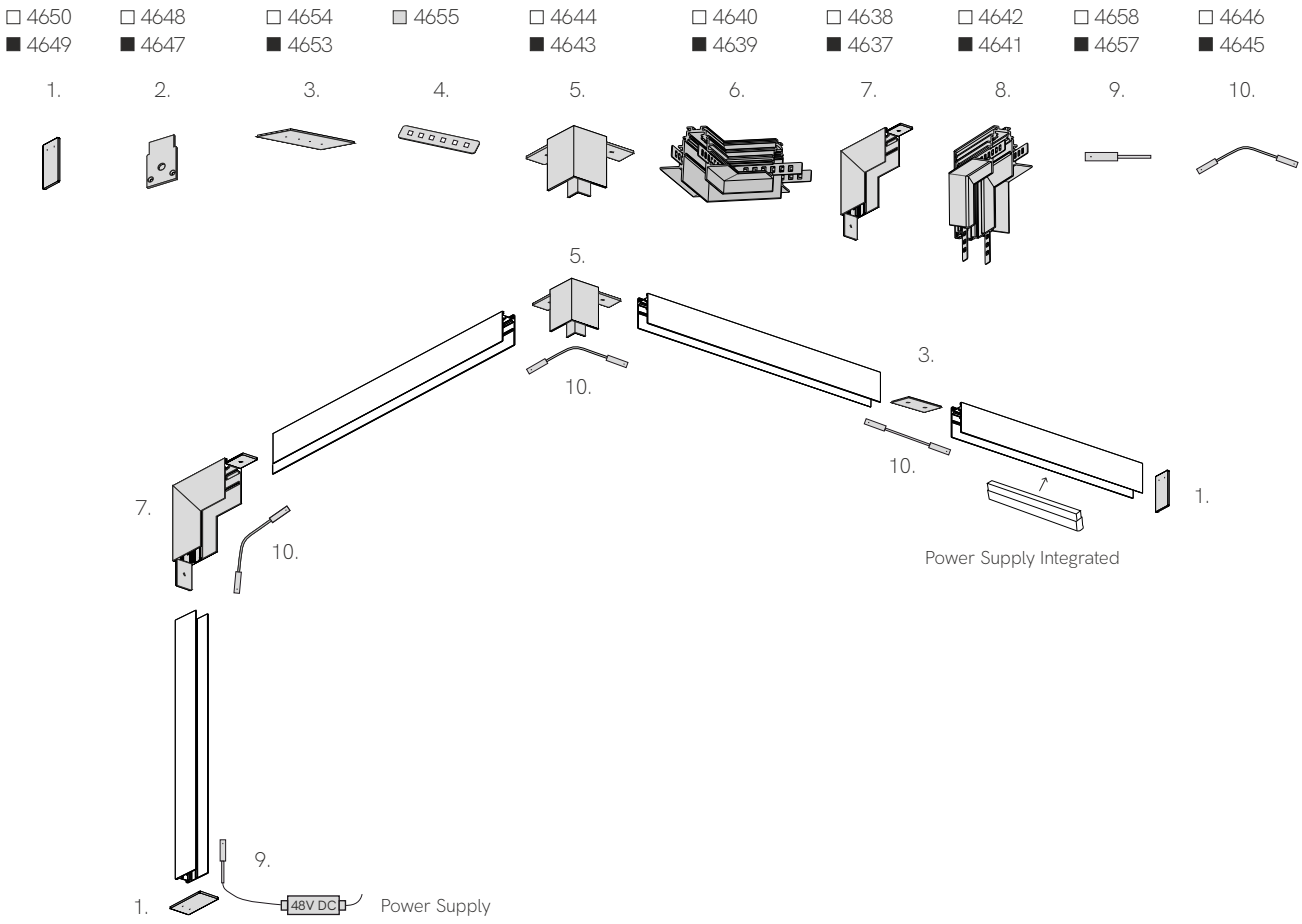

CE RoHS EMC

3 YEARS WARRANTY | IP 20 | III

Power Supplies 48V

Code		Version	Power	IP	VDC OUT	Size
4711	■	Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	▢	Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	▢	Power Supply Top	240W	IP65	48 VDC	244x71x37mm
5139	▢	Power Supply Dali	90W	IP67	48 VDC	171x63x38mm
5140	▢	Power Supply Dali	200W	IP67	48 VDC	191x68x40mm
5558	☐ New	Power Supply Integrated	100W	IP20	48 VDC	325x23x23mm
6023	■	Power Supply Integrated	100W	IP20	48 VDC	325x23x23mm
5559	☐ New	Power Supply Integrated	250W	IP20	48 VDC	390x23x43mm
6025	■	Power Supply Integrated	250W	IP20	48 VDC	390x23x43mm

5 YEARS WARRANTY | Basic Dali Integrated | Top | PF >0,9



Magnet track 48V surface

W: 26mm H: 53mm

☐	1m	4660
☐	2m	4662
■	1m	4659
■	2m	4661



Magnet track 48V recessed

W: 72mm x H: 55mm

☐	1m	4664
☐	2m	4666
■	1m	4663
■	2m	4665



End cap 48V surface

L: 53mm W: 26.6mm H: 2mm


☐	4650
■	4649



End cap 48V recessed

L: 52mm W: 32mm H: 2mm


☐	4648
■	4647



L joint wall 48V ceiling surface

L: 100mm W: 100mm H: 26mm


☐	4638
■	4637



L joint wall 48V ceiling recessed

L: 100mm W: 100mm H: 72mm


☐	4642
■	4641



L joint 48V ceiling surface

L: 40mm W: 40mm H: 53mm

☐	4644
■	4643



L joint 48V ceiling recessed

L: 100mm W: 100mm H: 55mm

☐	4640
■	4639



Curve magnet track 48V surface

W: 26mm H: 53mm

○	R500 1/4	5317
●	R500 1/4	5319

Curve/straight end cap 48V

L: 53mm W: 26.6mm H: 2mm

☐	4650-N
■	4649-N



Linear joint 48V surface

L: 80mm W: 22.5mm H: 2mm

☐	4654
■	4653



Linear joint 48V recessed

L: 70mm W: 11.5mm H: 1mm

▩	4655



Start connector 48V

L: 98mm W: 18mm H: 18mm

☐	4658
■	4657



Central corner connector 48V

L: 98mm W: 18mm H: 18mm

☐	4646
■	4645



PVC trim 48V

W: 26.8mm H: 3.5mm

■	1m	4651
■	2m	4652



Suspension kit 48V

L: 45mm W: 22mm | Ø15mm H: 1.900mm

■	4807

Surface Recessed Common


Oficinas La Finca 2
Regulador
60.9 %
Temperatura de color
3000 K

Casambi magnet track control

CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.

Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.


Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.


CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi.
Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.





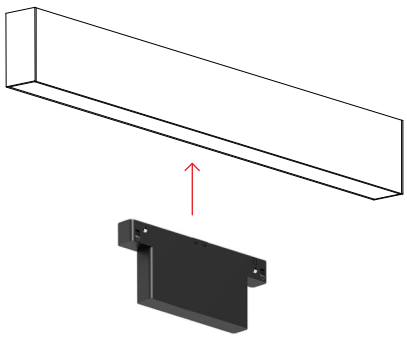

Code	Version	Power	IP	VDC OUT	Size
☐ 6721	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm
■ 6722	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm


CE RoHS

3 YEARS WARRANTY | 24-48V DC | +40°C -20°C | 1




Alp 48V





Alp 48V suspension





*Need power supply (page 366).

Technical Information

	Alp 48V	Alp 48V suspension
Power	4,5W	4,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	260 lm / 270 lm	260 lm / 270 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	4787	○	2.700K	4791
	○	3.000K	4788	○	3.000K	4792
	●	2.700K	4789	●	2.700K	4793
	●	3.000K	4790	●	3.000K	4794
	ⓘ	Custom RAL		ⓘ	Custom RAL	
		1/20			1/25	

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C




Mini Bora 48V





Bora 48V suspension





*Need power supply (page 366).


Technical Information

	Mini Bora 48V	Bora 48V suspension
Power	4,5W	8,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	315 lm / 325 lm	610 lm / 620 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4581	○	2.700K	4573
	○	3.000K	4582	○	3.000K	4574
	●	2.700K	4583	●	2.700K	4575
	●	3.000K	4584	●	3.000K	4576
	●	2.700K	4585	●	2.700K	4577
	●	3.000K	4586	●	3.000K	4578
	●	2.700K	4587	●	2.700K	4579
	●	3.000K	4588	●	3.000K	4580
	UGR <10 | 38°			UGR <15 | 36°		


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | CRI ≥93 | III | +40°C -20°C | 1/18

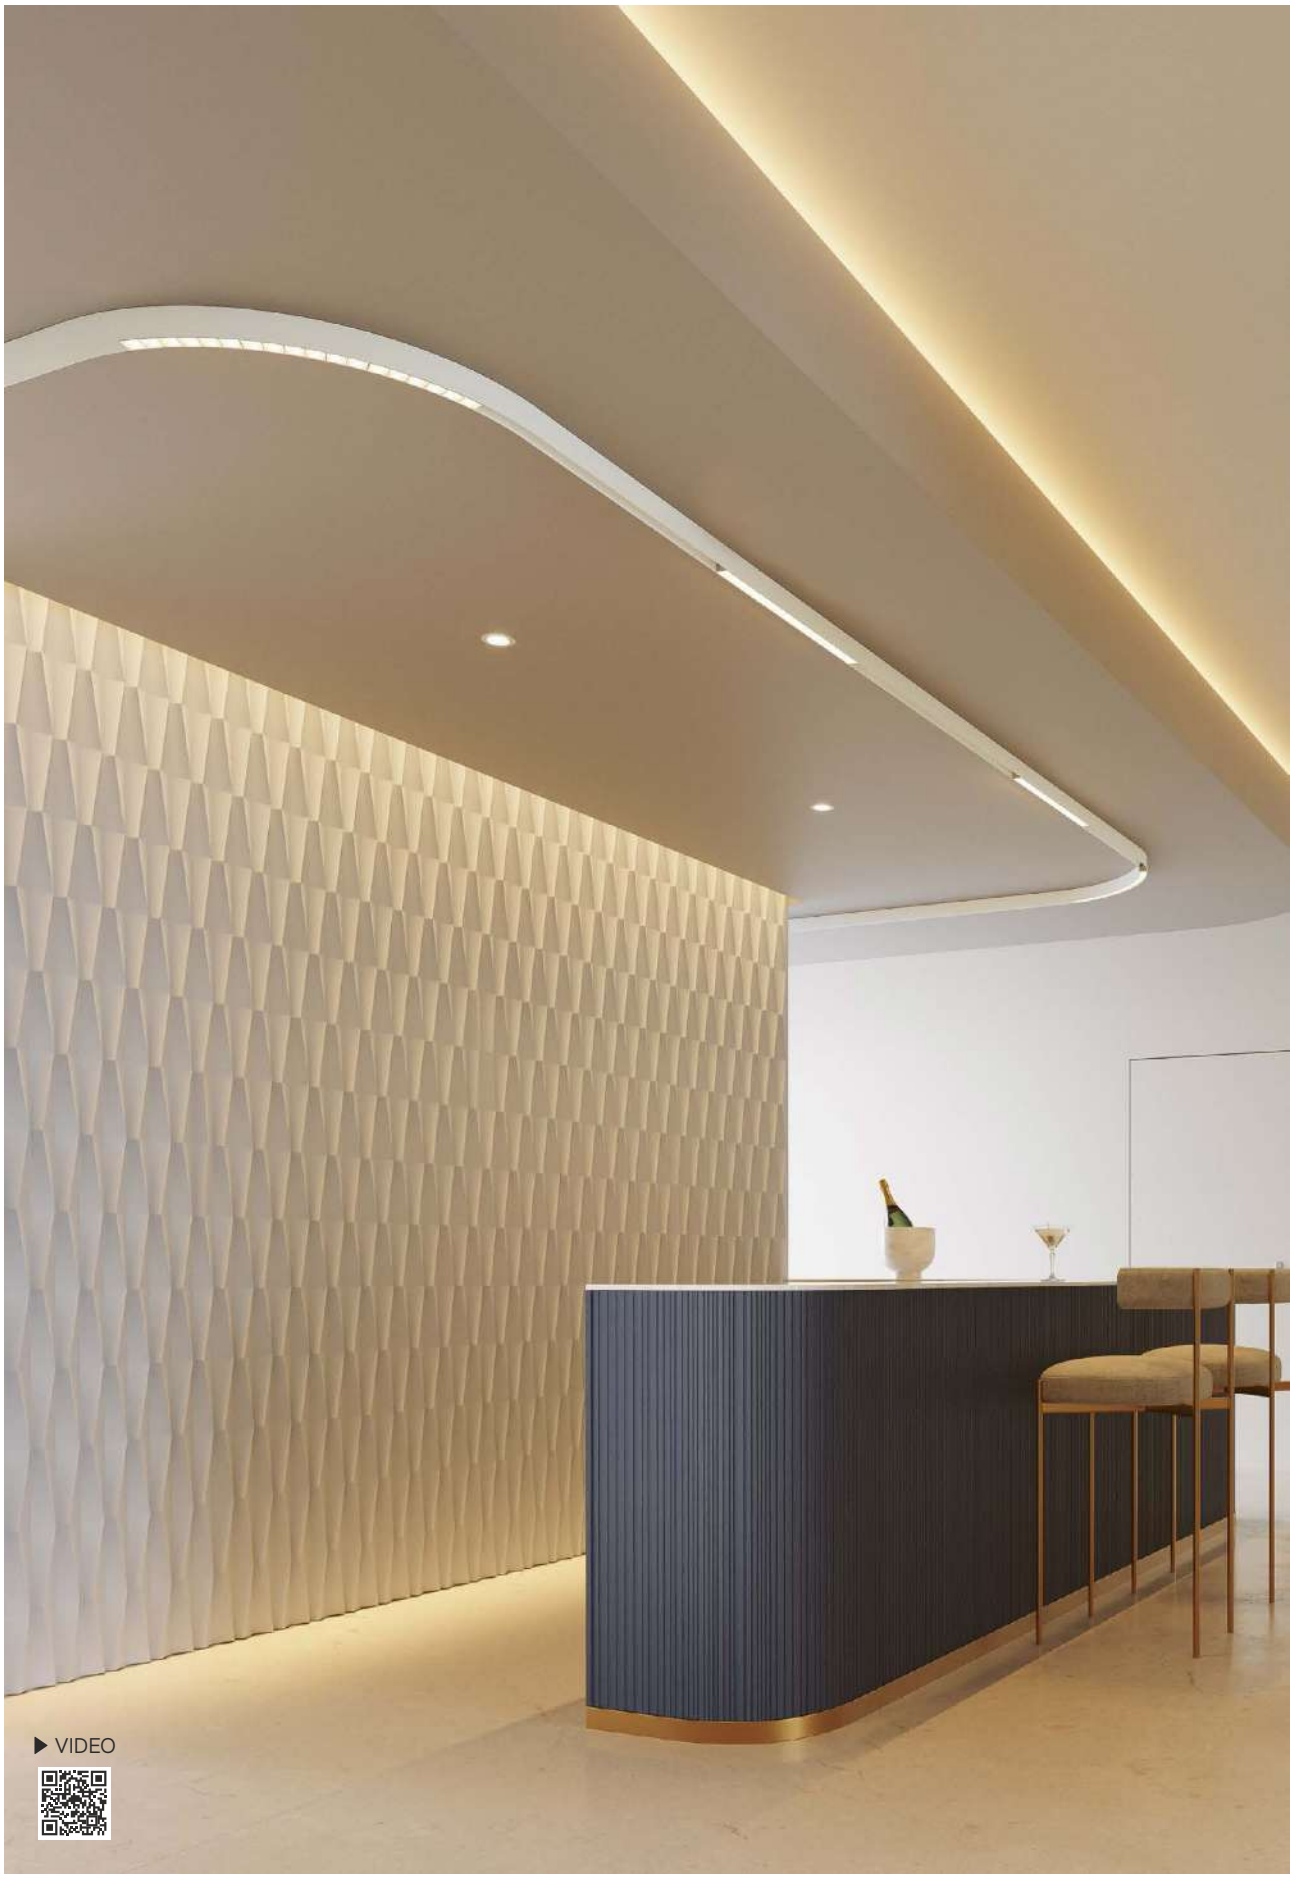
▶ VIDEO


Nano Tram 48V






Mini Tram 48V





Curve Tram 48V





*Need power supply (page 366).

Technical Information

	Nano Tram 48V	Mini Tram 48V	Curve Tram 48V
Power	4,5W	9W	6W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	300 lm / 310 lm	690 lm / 710 lm	500 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	Nano Tram 48V		Mini Tram 48V		Curve Tram 48V	
	☐ 2.700K	4776	☐ 2.700K	4780	○ 2.700K	5309
	☐ 3.000K	4777	☐ 3.000K	4781	○ 3.000K	5310
	■ 2.700K	4778	■ 2.700K	4782	● 2.700K	5311
	■ 3.000K	4779	■ 3.000K	4783	● 3.000K	5312
	26.000 HOURS | 24° | 1/50		26.000 HOURS | 24° | 1/50		30.000 HOURS | 36° | 1/40	


CE RoHS EMC

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C




Nano Line 48V






Mini Line 48V






Line 48V





Curve Line 48V





*Need power supply (page 366).

Technical Information

	Nano Line 48V	Mini Line 48V	Line 48V	Curve Line 48V
Power	7,5W	15W	30W	8W
Installation	Magnet Track	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	310 lm / 320 lm	740 lm / 760 lm	1.000 lm / 1.050 lm	300 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black	White / Black

Code									
	■	2.700K	5202	■	2.700K	5203	■	2.700K	5204	○	2.700K	5313
	■	3.000K	4784	■	3.000K	4785	■	3.000K	4786	○	3.000K	5314
										●	2.700K	5315
										●	3.000K	5316
	26.000 HOURS | 1/25			26.000 HOURS | 1/25			26.000 HOURS | 1/20			30.000 HOURS | 1/40		


CE RoHS EMC

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C



Diro 48V





*Need power supply (page 366).


Casambi magnet track control (page 369).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	Dali 2.700K - 6.500K
Lumens	420 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 5239
	● 5238

Accessories



Honeycomb anti-glare
(Included)

CE RoHS


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 48V DC | UGR <10 | CRI ≥90 | 36° | +40°C -20°C | DALI 2 | 1/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.

Zoe 48V suspension





*Need power supply (page 366).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	360 lm / 370 lm
Material	Aluminium
Finishes	White / Black

Code			
	△	2.700K	4795
	△	3.000K	4796
	▲	2.700K	4797
	▲	3.000K	4798
ⓘ		Custom RAL	

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C | 1/36



New

Mini Hat 48V suspension




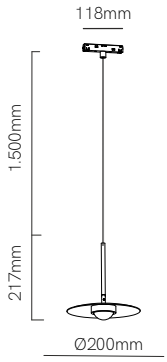

*Need power supply (page 366).

Hat 48V suspension



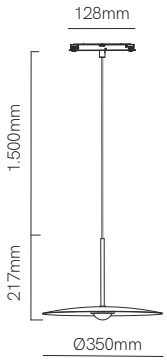

Technical Information

	Mini Hat 48V suspension	Hat 48V suspension
Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800 lm	800 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5714	○	2.700K	5363
	○	3.000K	5716	○	3.000K	5364
	●	2.700K	5715	●	2.700K	5366
	●	3.000K	5717	●	3.000K	5367
	70°		1/10	83°		1/5


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | +40°C -20°C




Sphere 48V





Sphere 48V suspension





*Need power supply (page 366).

Technical Information

	Sphere 48V	Sphere 48V suspension
Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	255 lm	255 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black

Code						
	○	2.700K	5369	○	2.700K	5375
	○	3.000K	5370	○	3.000K	5376
	●	2.700K	5372	●	2.700K	5378
	●	3.000K	5373	●	3.000K	5379


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 360° | +40°C -20°C | 1/12




Volt r 48V





Volt sq 48V





*Need power supply (page 366).

Casambi magnet track control (page 369).

Technical Information

	Volt r 48V	Volt sq 48V
Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 5037	□ 5039
	● 5038	■ 5040
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EAC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 38° | IK06 | +45°C -20°C | DALI 2 | 1/20


To Kill a Mockingbird
To Kill a Mockingbird
To Kill a Mockingbird

Dot 48V





*Need power supply (page 366).

Technical Information

Power	11W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	680 lm / 690 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	4768
	○	3.000K	4769
	●	2.700K	4770
	●	3.000K	4771
ⓘ		Custom RAL	

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 35° | +40°C -20°C | 1/20




Cookie 48V







Cookie 48V





Cookie 48V suspension

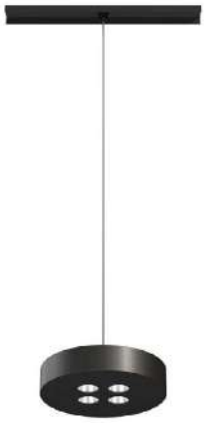



*Need power supply (page 366).

Casambi magnet track control (page 369).

Technical Information

Power	12W	12W	12W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	940 lm / 950 lm	500 lm - 700 lm	500 lm - 700 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code				
	○	2.700K	4772	
	○	3.000K	4773	
	●	2.700K	4774	
	ⓘ	Custom RAL		
		26.000 HOURS		
	○	5181		
	●	5182		
	ⓘ	Custom RAL		
		30.000 HOURS	DALI 2	
	○	5185		
	●	5186		
	ⓘ	Custom RAL		
		30.000 HOURS	DALI 2	

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C | 1/20



Fine 25 circle 48V





*Need power supply (page 366).

Technical Information

Power	19W
Installation	Magnet Track
Color Temperature	3.000K / 4.000K
Lumens	850 lm / 950 lm
Finishes	Aluminium / Black


Code			
	○	3.000K	5431
	○	4.000K	5441
	●	3.000K	5432
	●	4.000K	5442

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 360° | +40°C -20°C | 1



Outdoor track

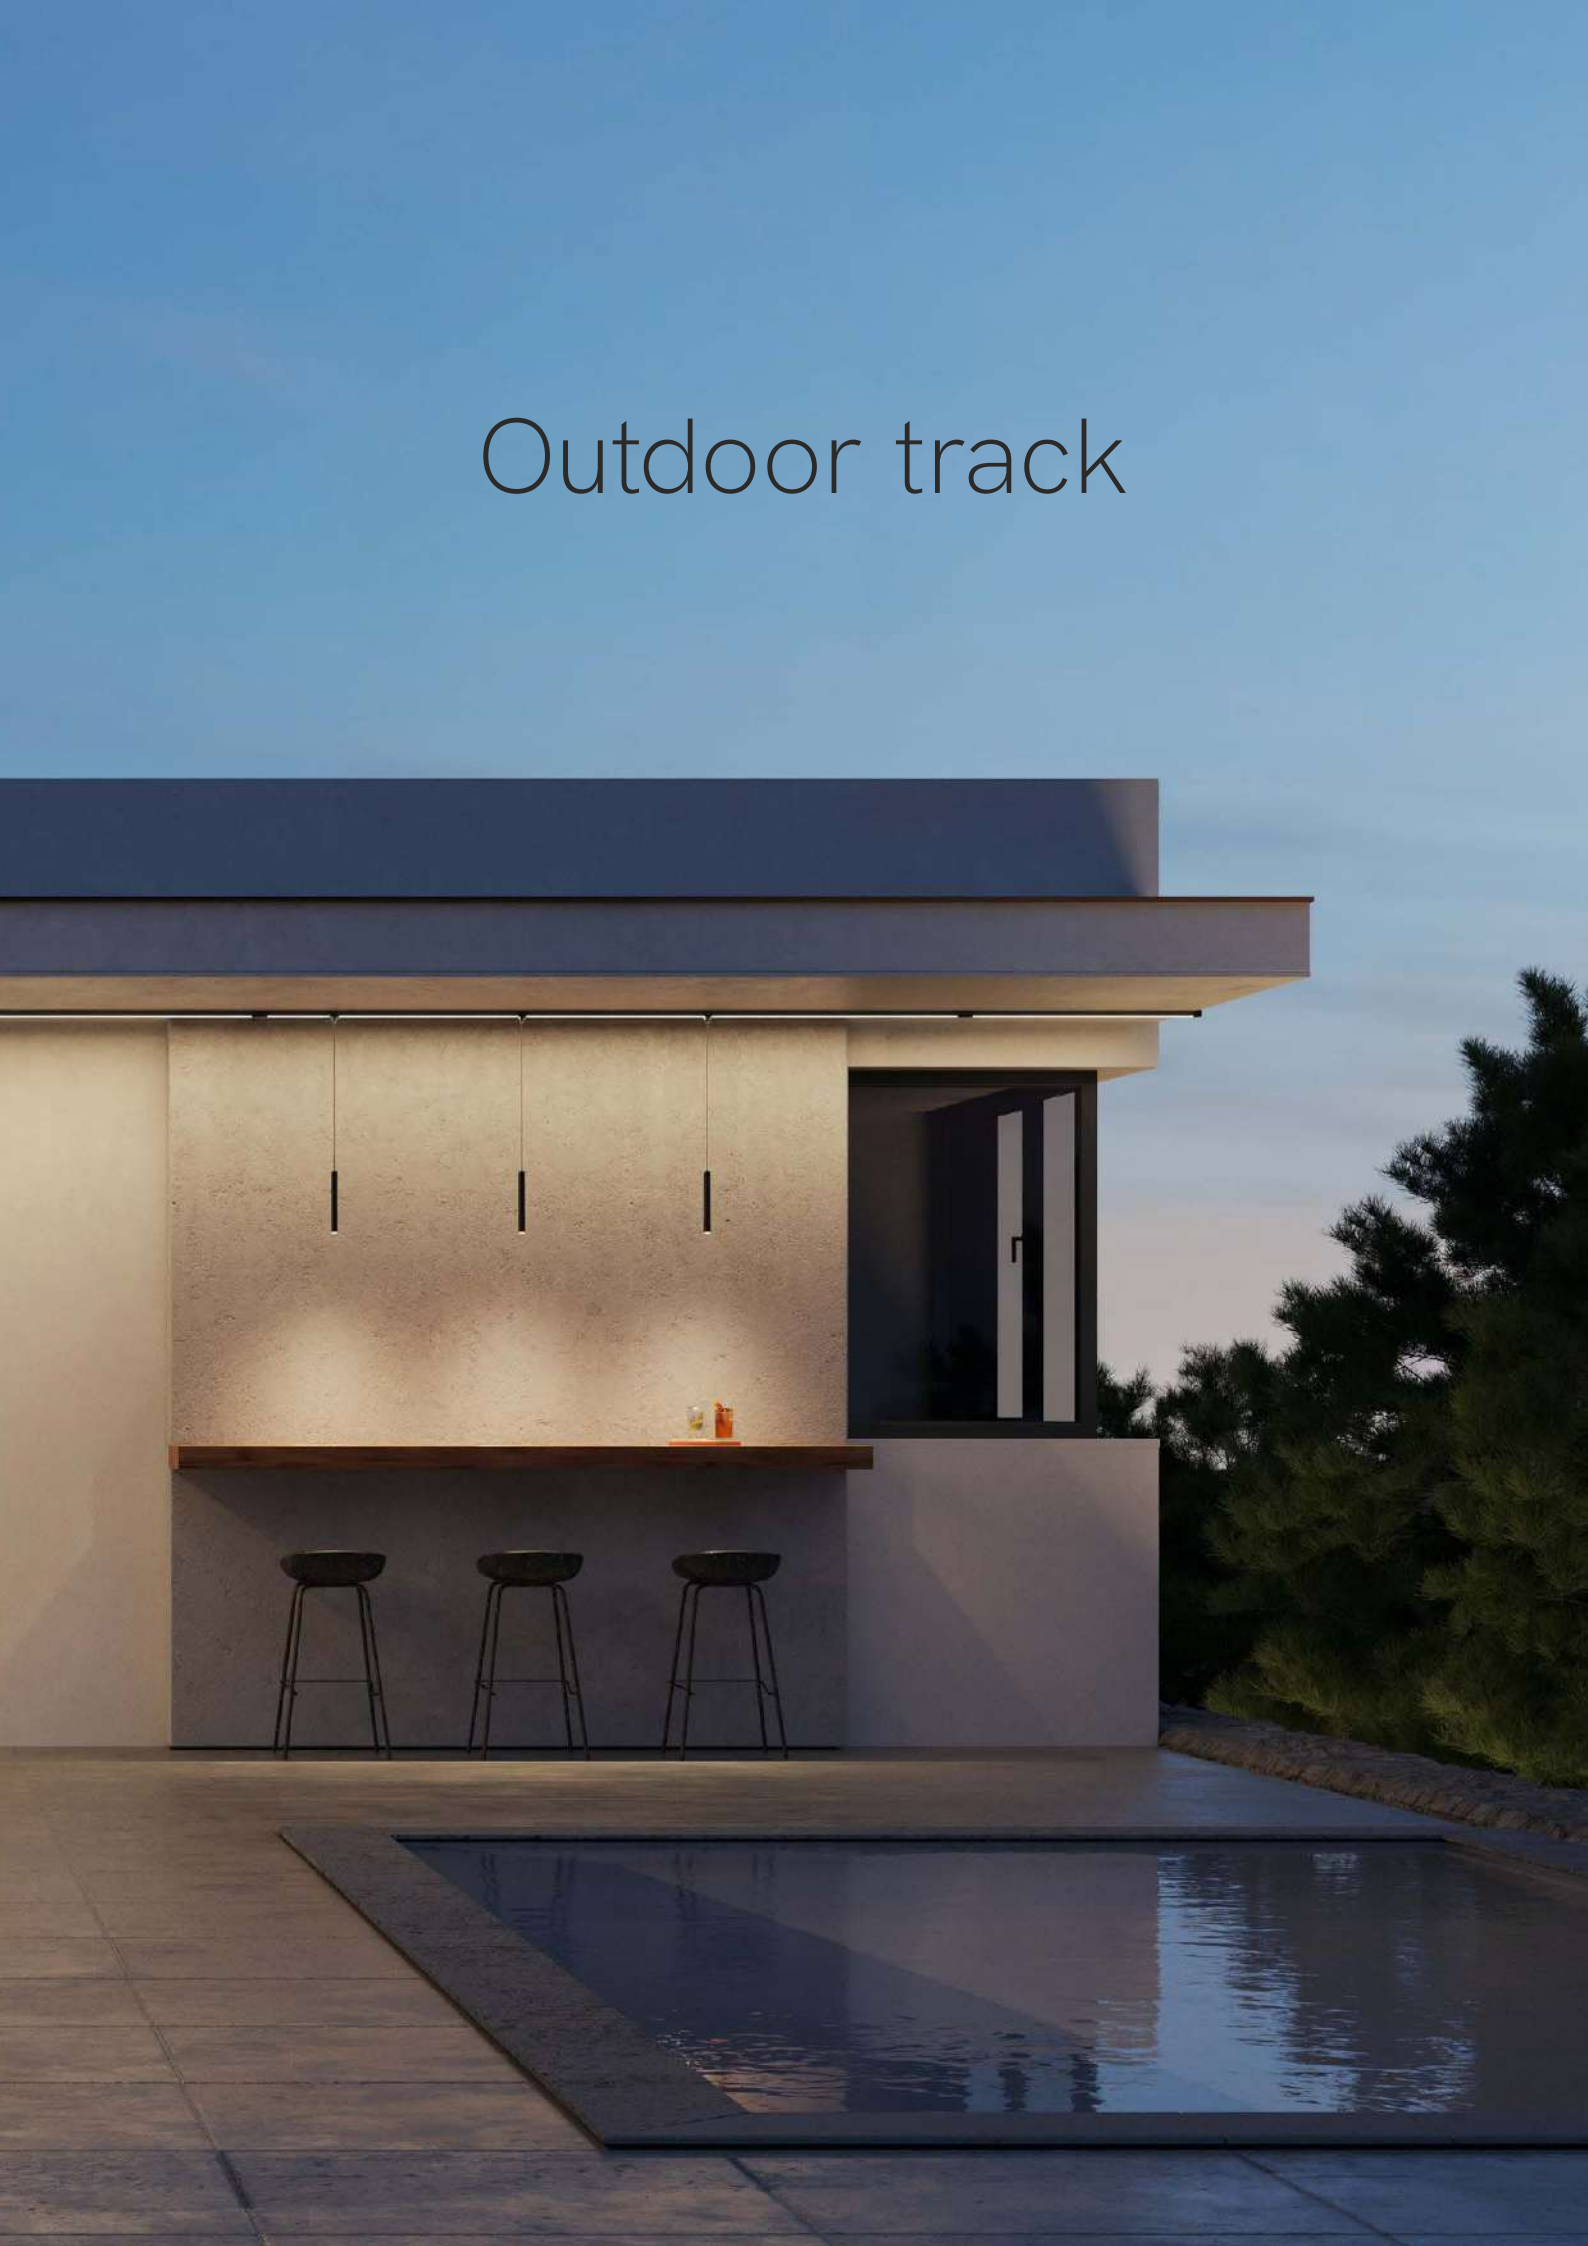











Outdoor track accessories



Outdoor Track IP
W: 26mm H: 25mm

☐	5406	1m
☐	5407	2m
☐	5408	3m
■	5409	1m
■	5410	2m
■	5411	3m



L joint ceiling IP
L: 70mm W: 70mm H: 26mm

☐	5412
■	5413



L joint wall ceiling IP
L: 70mm W: 70mm H: 30mm

☐	5425
■	5426



Linear joint IP
L: 100mm W: 30mm H: 26mm

☐	5414
■	5415



End cap IP
L: 62mm W: 30mm H: 26mm

☐	5416
■	5417

Waterproof silicone cover IP
L: 20mm W: 14mm H: 4mm

☐	5418

CE RoHS

3 YEARS WARRANTY | IK06 |


Power Supplies 48V

Code		Version	Power	IP	VDC OUT	Size
4711	■	Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	☐	Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	☐	Power Supply Top	240W	IP65	48 VDC	244x71x37mm


5 YEARS WARRANTY | Basic | Top | PF >0,9




Frame 48V IP 1m



Frame 48V IP 2m



Frame 48V IP 3m



*Need power supply (page 397).

Technical Information

Power	10W	20W	30W
Installation	Outdoor Track	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	680 lm	1.400 lm	2.055 lm
Material	Silicone	Silicone	Silicone


Code	☐ 2.700K 5400	☐ 2.700K 5402	☐ 2.700K 5404
	☐ 3.000K 5401	☐ 3.000K 5403	☐ 3.000K 5405

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | CRI ≥90 | 100° | 125mm | IK06 | +45°C -20°C | 1/15



Atmos slim 48V IP

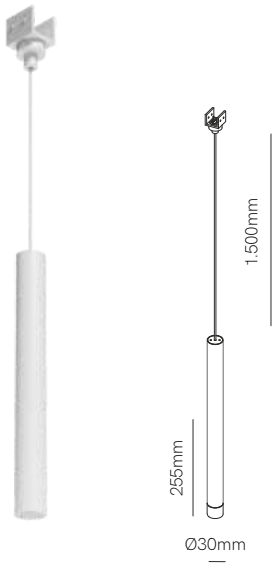

*Need power supply (page 397).


Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	510 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5392
	○	3.000K	5393
	●	2.700K	5394
	●	3.000K	5395


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 38° | IK06 | +45°C -20°C | 1/20

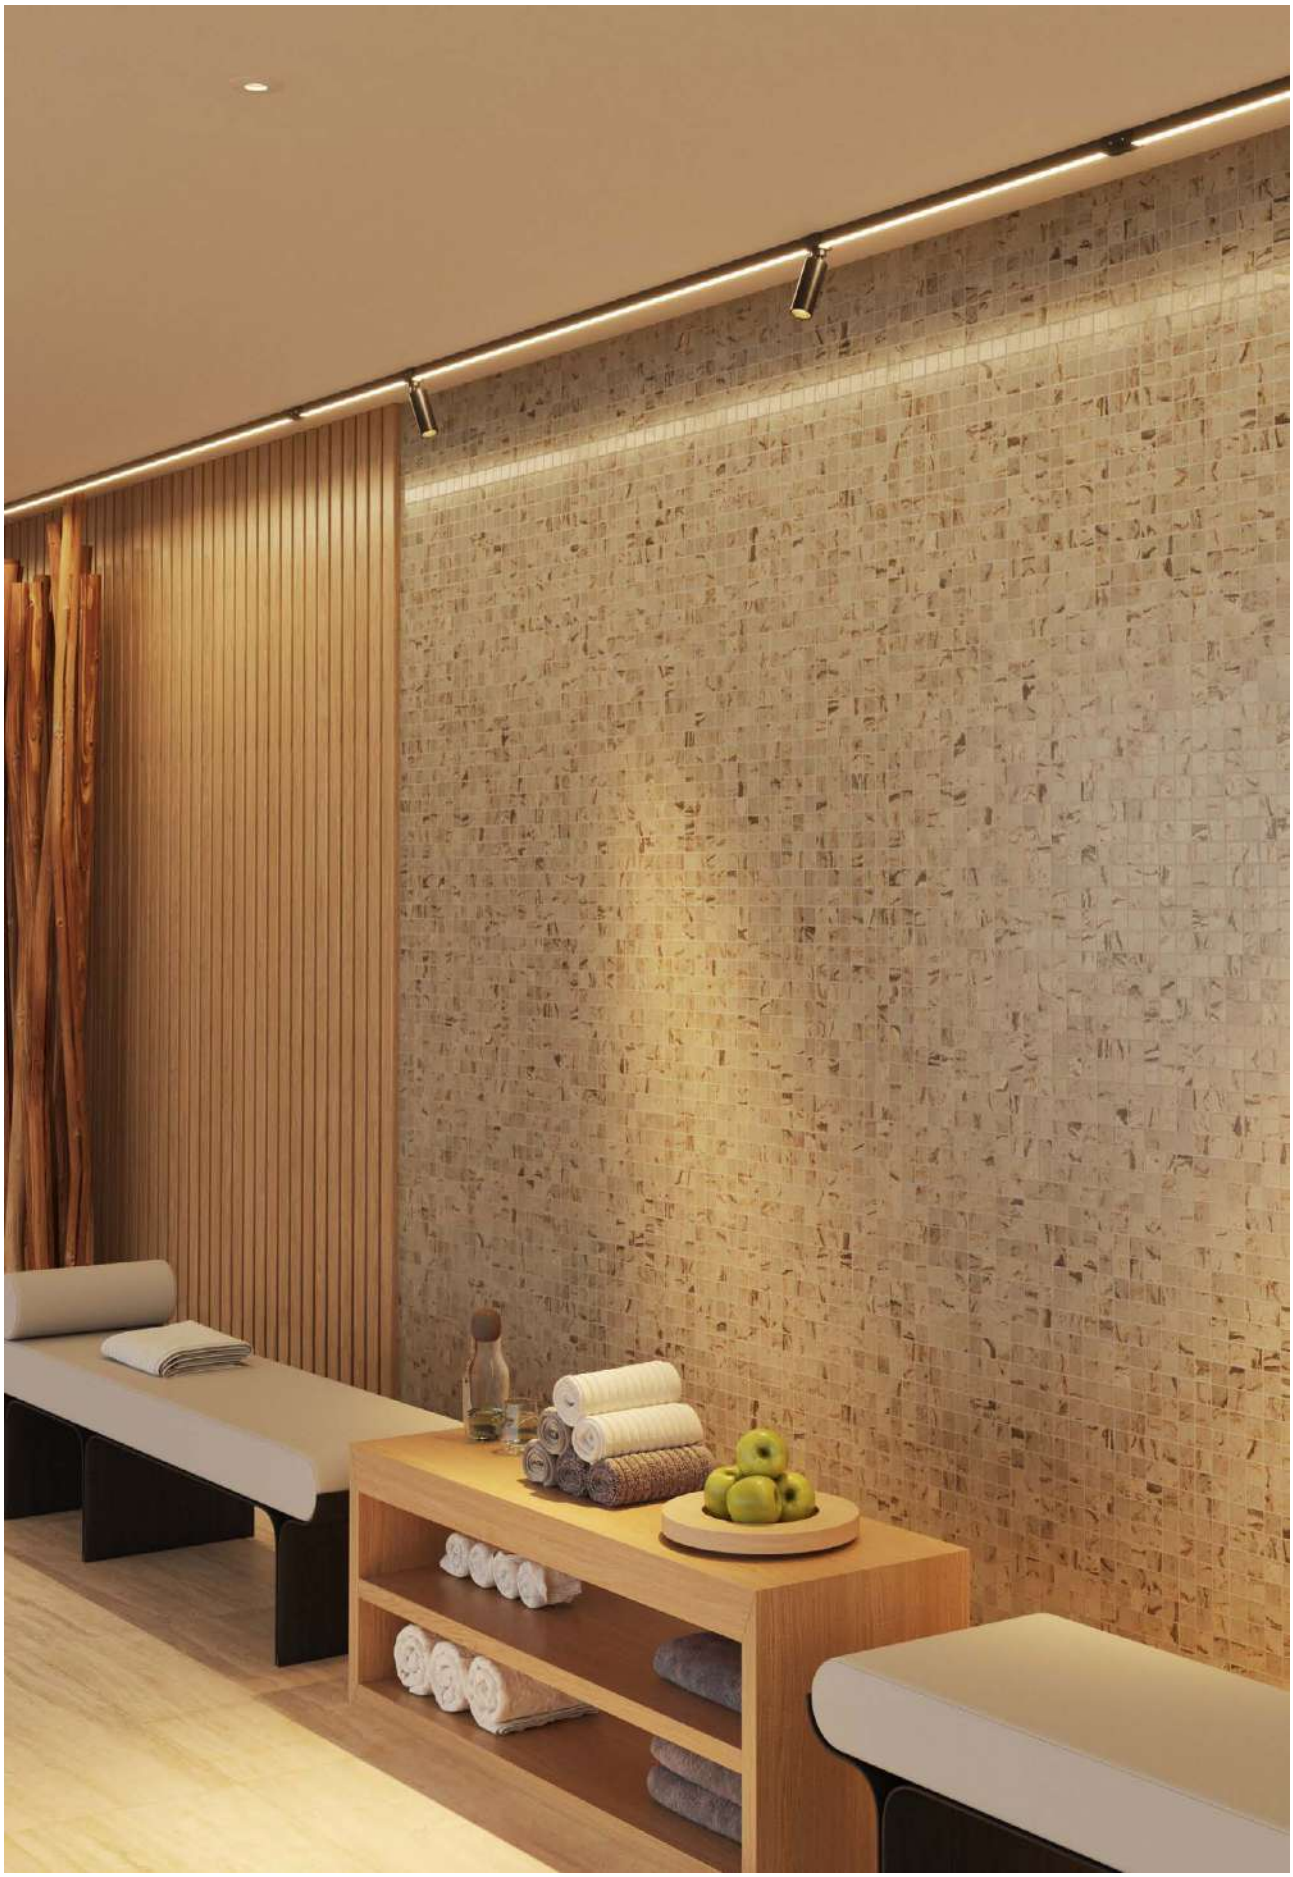

Bit 48V IP





*Need power supply (page 397).

Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	630 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5396
	○	3.000K	5397
	●	2.700K	5398
	●	3.000K	5399


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 55° | IK06 | +45°C -20°C | 1/20




Ice 48V IP





Ice XL 48V IP





*Need power supply (page 397).

Technical Information

Power	10W	20W
Installation	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	685 lm	1.110 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	☐	2.700K	5384	☐	2.700K	5388
	☐	3.000K	5385	☐	3.000K	5389
	■	2.700K	5386	■	2.700K	5390
	■	3.000K	5387	■	3.000K	5391
			1/40			1/20

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 45° | IK06 | +45°C -20°C






Recessed



Nano Argo flat reccesed








Argo recessed








Argo XL recessed







Technical Information


	Nano Argo flat reccesed	Argo recessed	Argo XL recessed
Power	2W	3,5W	3,5W
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	80 lm	125 lm	125 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black

Code	Nano Argo flat reccesed	Argo recessed	Argo XL recessed
○ 2.700K	5258	5246	5252
○ 3.000K	5259	5247	5253
○ 4.000K	5260	5248	5254
● 2.700K	5261	5249	5255
● 3.000K	5262	5250	5256
● 4.000K	5263	5251	5257

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C -20°C | 1/100


WATCHES

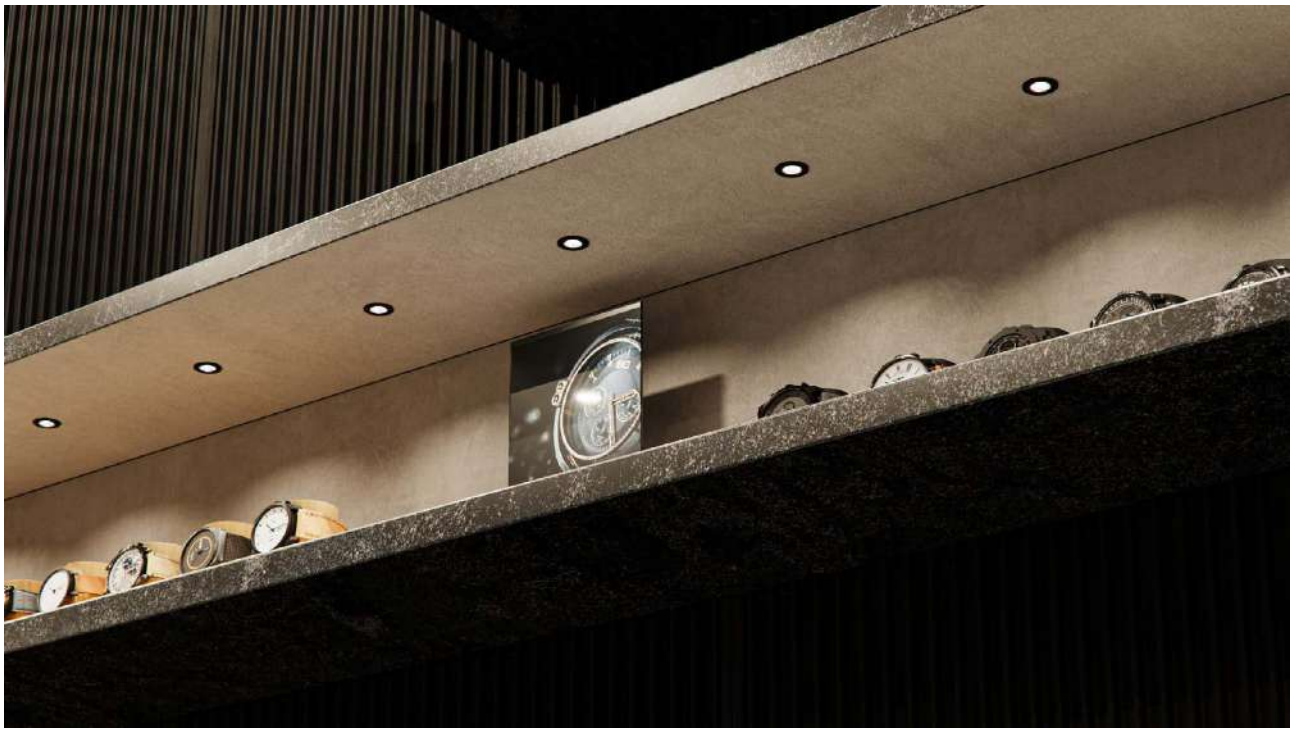

Atom recessed





Technical Information

Power	2W
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5267
	○	3.000K	5268
	○	4.000K	5269
	●	2.700K	5270
	●	3.000K	5271
	●	4.000K	5272


CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/100


▶ VIDEO


Micro Zoom recessed



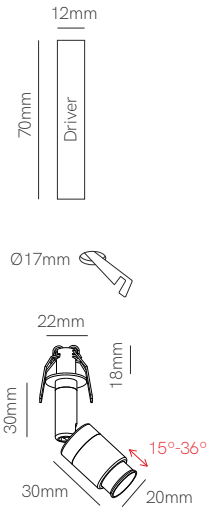

Micro Zoom XL recessed



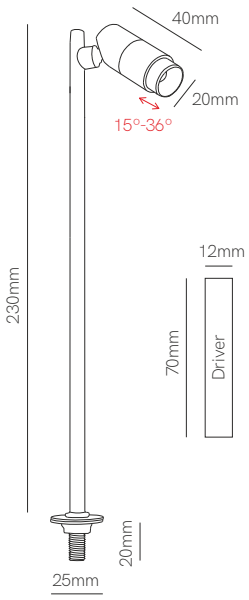

RECESSED

Technical Information

	Micro Zoom recessed	Micro Zoom XL recessed
Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5273	○	2.700K	5279
	○	3.000K	5274	○	3.000K	5280
	○	4.000K	5275	○	4.000K	5281
	●	2.700K	5276	●	2.700K	5282
	●	3.000K	5277	●	3.000K	5283
	●	4.000K	5278	●	4.000K	5284
			1/100			1/50

CE RoHS EMC


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C -20°C



Ribera Manero, seafood restaurant, Barcelona (Spain).

Nano Pulsar r / sq recessed




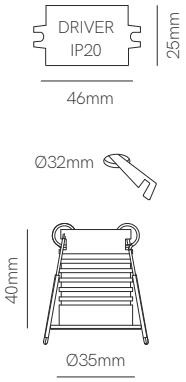

Nano Pulsar r / sq trim



*Need Nano Pulsar



Nano Pulsar r / sq surface



*Need Nano Pulsar



Technical Information

	Nano Pulsar r / sq recessed	Nano Pulsar r / sq trim	Nano Pulsar r / sq surface
Power	3,5W	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.000K / 4.000K	-	-
Lumens	170 lm / 180 lm / 200 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White-matt gold/Black-matt gold	White / Black

Code	Nano Pulsar r / sq recessed		Nano Pulsar r / sq trim		Nano Pulsar r / sq surface	
	○	2.700K 4297	◉	5208	○	4410
	○	3.000K 4298	◉	5209	●	4411
	○	4.000K 4299	▣	5210	□	4412
	●	2.700K 4300	▣	5211	■	4413
	●	3.000K 4301			ⓘ	Custom RAL
	●	4.000K 4302				
	□	2.700K 4451				
	□	3.000K 4452				
	□	4.000K 4453				
	■	2.700K 4454				
	■	3.000K 4455				
	■	4.000K 4456				
ⓘ		Custom RAL				
	1/50		1/4/300		1/50	

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | +40°C -20°C



Pulsar dimm recessed







Pulsar trim



*Need Pulsar






Asymmetric

Pulsar surface accessory



*Need Pulsar



Technical Information


	Pulsar dimm recessed	Pulsar trim	Pulsar surface accessory
Power	8W	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	-	-
Lumens	780 lm / 800 lm / 840 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White / Black



Code			
	○ 5057	◐ 5206	○ 5110
	● 5058	◑ 5207	● 5111
	ⓘ Custom RAL	○ 5059 Asymmetric	ⓘ Custom RAL
		● 5060 Asymmetric	
		◐ 5212 Asymmetric	
		◑ 5213 Asymmetric	
		ⓘ Custom RAL	
	1/10/30	1/50	1/20

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C -20°C | CCT SWITCH

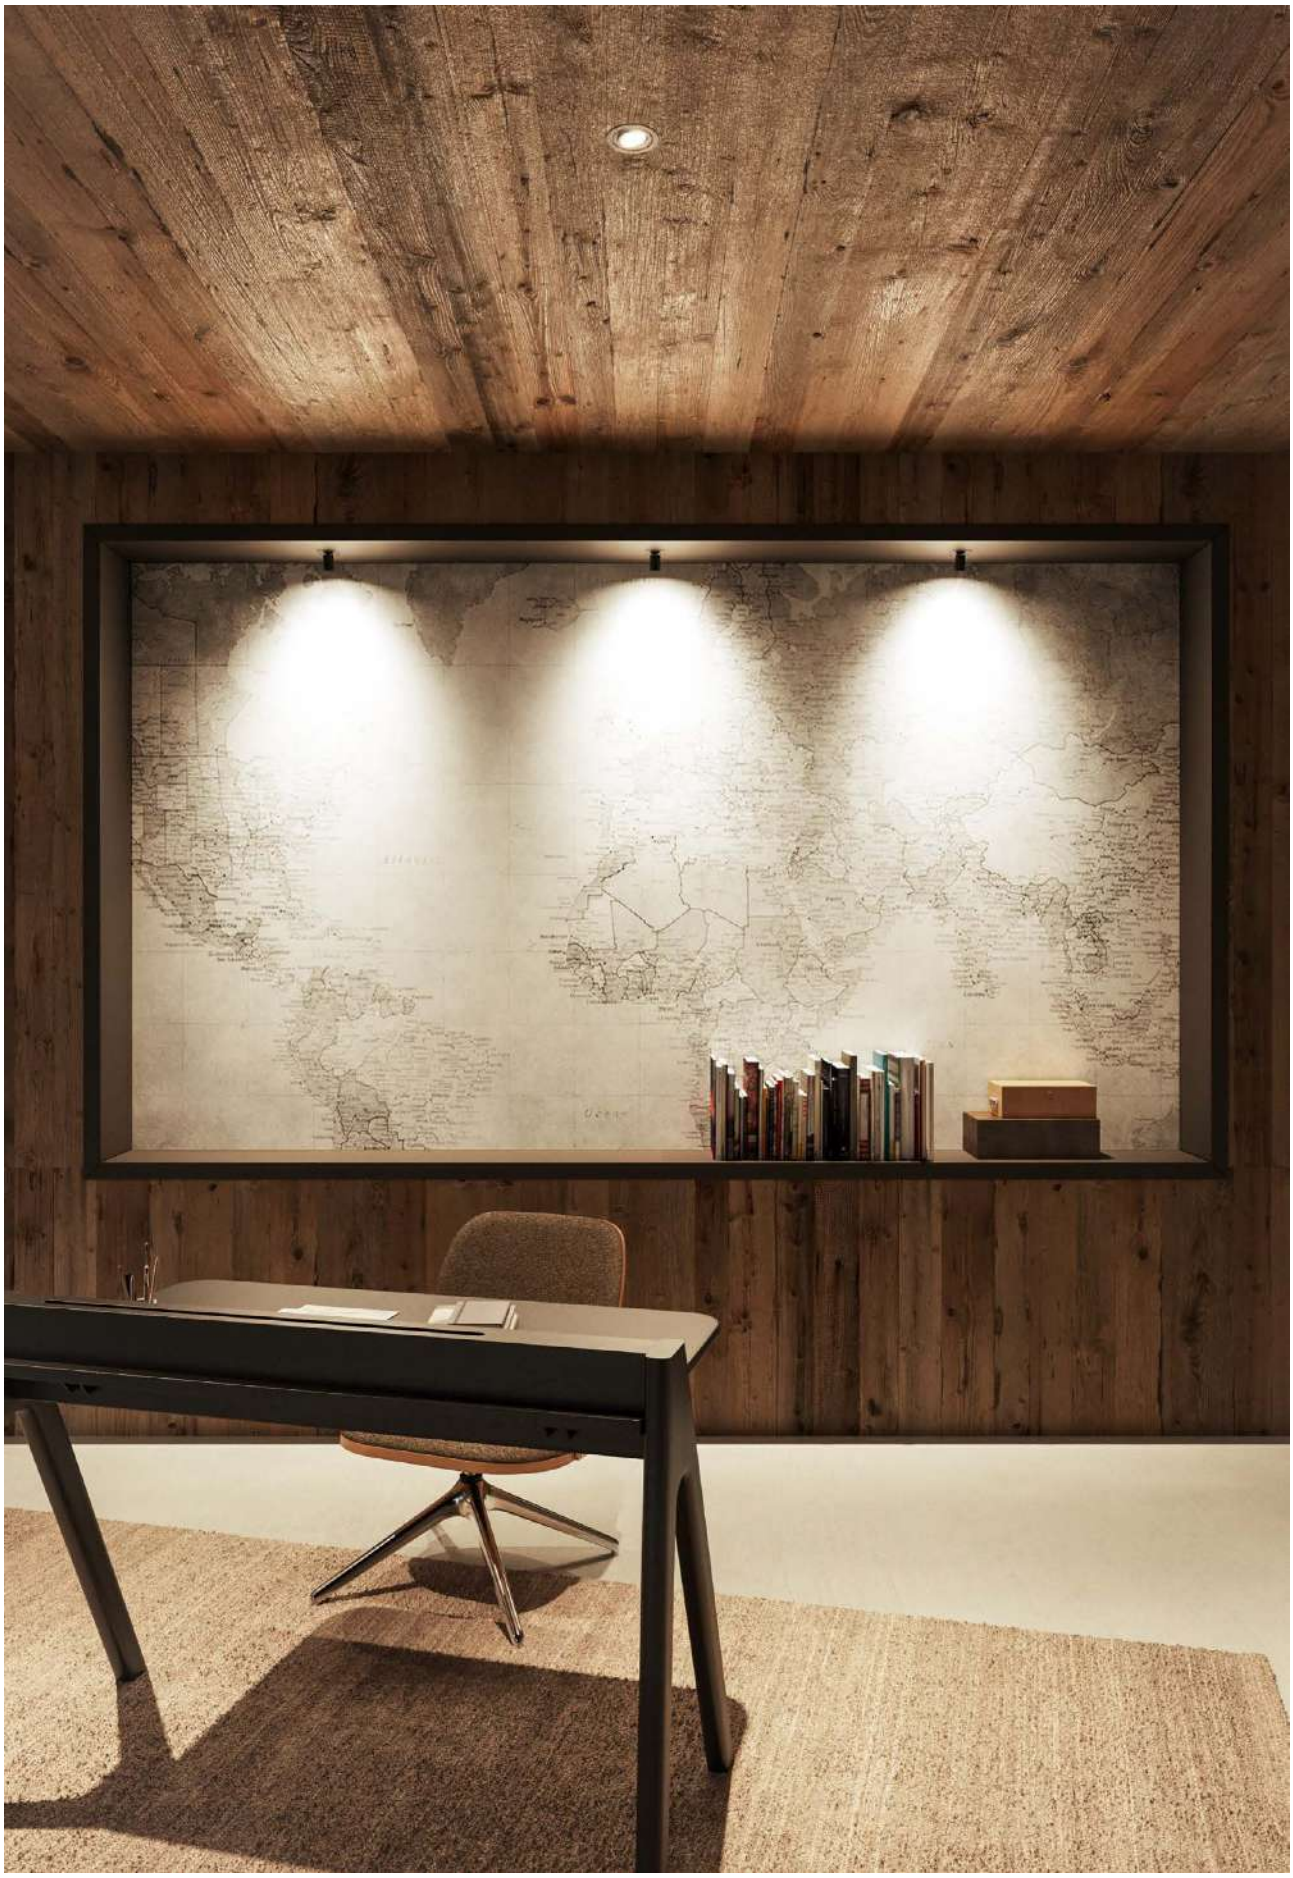

Nano Oxo r recessed	Nano Oxo sq recessed
	
	
	

Technical Information

Power	4W	4W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4549	□ 4550
	● 4551	■ 4552
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 45° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/10/50




Mini Oxo r recessed





Mini Oxo sq recessed





Technical Information

	Mini Oxo r recessed	Mini Oxo sq recessed
Power	6W	6W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black

Code		
	○ 5061	□ 5108
	● 5062	■ 5109


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20




Mini Oxo rect 2 recessed



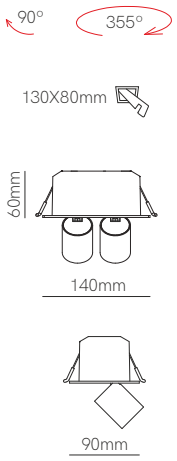


Mini Oxo rect 4 recessed



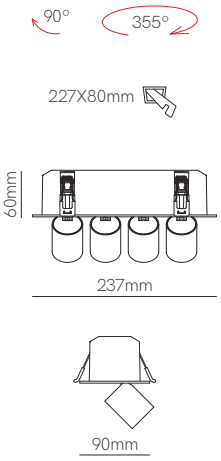

Mini Oxo rect 6 recessed



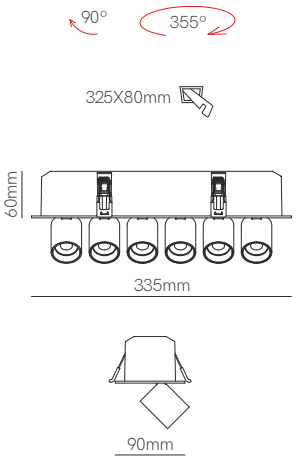

Technical Information

Power	12W	24W	36W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.200 lm	2.400 lm	3.600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black
Code	☐ 5063 ■ 5064	☐ 5065 ■ 5066	☐ 5067 ■ 5068
	1/10	1/10	1/5

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH




Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié l'iluminació. Architecture: Pablo Amorós.

Oxo r dimm recessed








Oxo sq dimm recessed







RECESSED

Technical Information

Power	12W	12W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 4457-D	□ 4459-D
	● 4458-D	■ 4460-D
	ⓘ Custom RAL	ⓘ Custom RAL

Accessories

Included with:
4457-D / 4459-D



Included with:
4457-D / 4458-D / 4459-D / 4460-D

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | +50°C -20°C | CCT SWITCH | 1/20




Mini Bora recessed





Bora recessed





Technical Information

	Mini Bora recessed	Bora recessed
Power	4,5W	8,5W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4589	○	2.700K	4597
	○	3.000K	4590	○	3.000K	4598
	●	2.700K	4591	●	2.700K	4599
	●	3.000K	4592	●	3.000K	4600
	●	2.700K	4593	●	2.700K	4601
	●	3.000K	4594	●	3.000K	4602
	●	2.700K	4595	●	2.700K	4603
	●	3.000K	4596	●	3.000K	4604
	UGR <10 | PF >0,5 | 38°			UGR <15 | PF >0,6 | 36°		


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18




New


Nano Tram recessed




Mini Tram recessed



Tram recessed



Tram XL recessed



*Tuya version need Tuya Smart App to work.

Technical Information

Power	6W	10W	20W	30W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Dali 2.700K - 6.000K	Tuya 2.700K - 6.000K	Tuya 2.700K -6.000K
Lumens	220 lm	500 lm	1.000 lm	1.500 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black
Code	☐ 4731	☐ 4733-V2	☐ 4735	☐ 4737
	■ 4732	■ 4734-V2	■ 4736	■ 4738
	tuya | 1/50	DALI 2 | 1/40	tuya | 1/20	tuya | 1/20

Accessories



Tuya Gateway Wifi

☐ 4956

CE RoHS


*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C -10°C




Compac r recessed





Compac sq recessed





Technical Information


	Compac r recessed	Compac sq recessed
Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White





Code		
○ 2.700K	3951	☐ 2.700K 3948
○ 3.000K	3952	☐ 3.000K 3949
○ 4.000K	3953	☐ 4.000K 3950
ⓘ Custom RAL		ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | 90° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 1/6/30

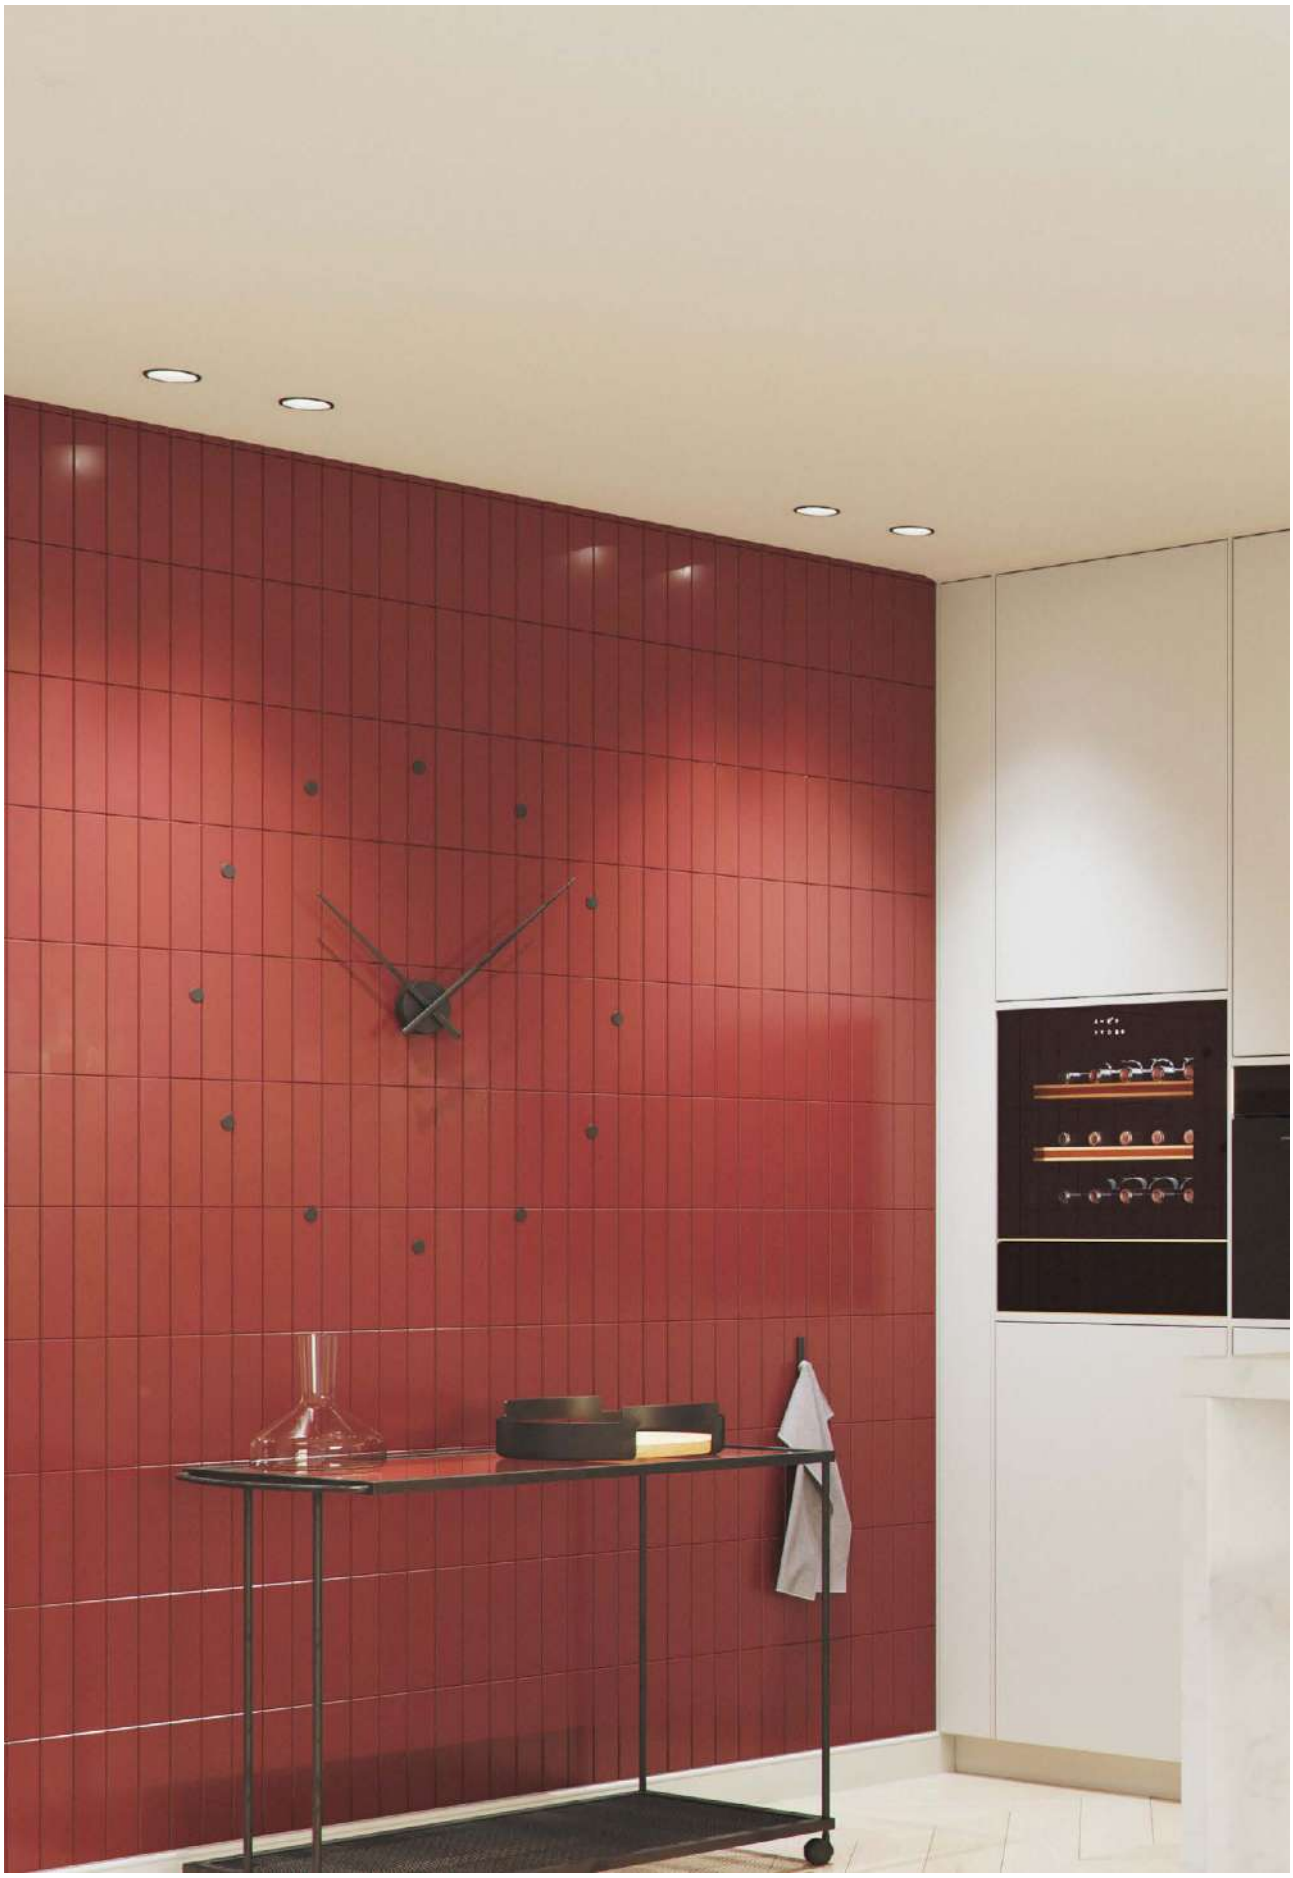

Pulcom r recessed	Pulcom sq recessed	Pulcom r recessed asymm	Pulcom sq recessed asymm
			
			

Technical Information

Power	8W	8W	8W	8W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature (Switch)	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K
Lumens	800 lm	800 lm	800 lm	800 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black	White / Black
Code	○ 4742	□ 4744	○ 4743	□ 4745
	● 4746	■ 4748	● 4747	■ 4749
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/5/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.


Pulcom led accessory






Pulcom trim











Pulcom asymm trim










Pulcom r surface





*Pulcom trim and surface need Pulcom led.

Technical Information


	Pulcom led accessory	Pulcom trim	Pulcom asymm trim	Pulcom r surface
Power	8W	-	-	-
Installation	Surface / Recessed	Recessed	Recessed	Surface
Color Temperature	2.700K/3.200K/4.000K	-	-	-
Lumens	800 lm	-	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black	White / Black / Wood

Code				
	○ 4763	○ 4761	○ 4821	○ 5034
	● 4764	● 4762	● 4822	● 5035
		4935	☐ 4825	5036
		☐ 4823	■ 4826	ⓘ Custom RAL
		■ 4824	ⓘ Custom RAL	
		ⓘ Custom RAL		
	1/100	1/100	1/100	1/50

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH

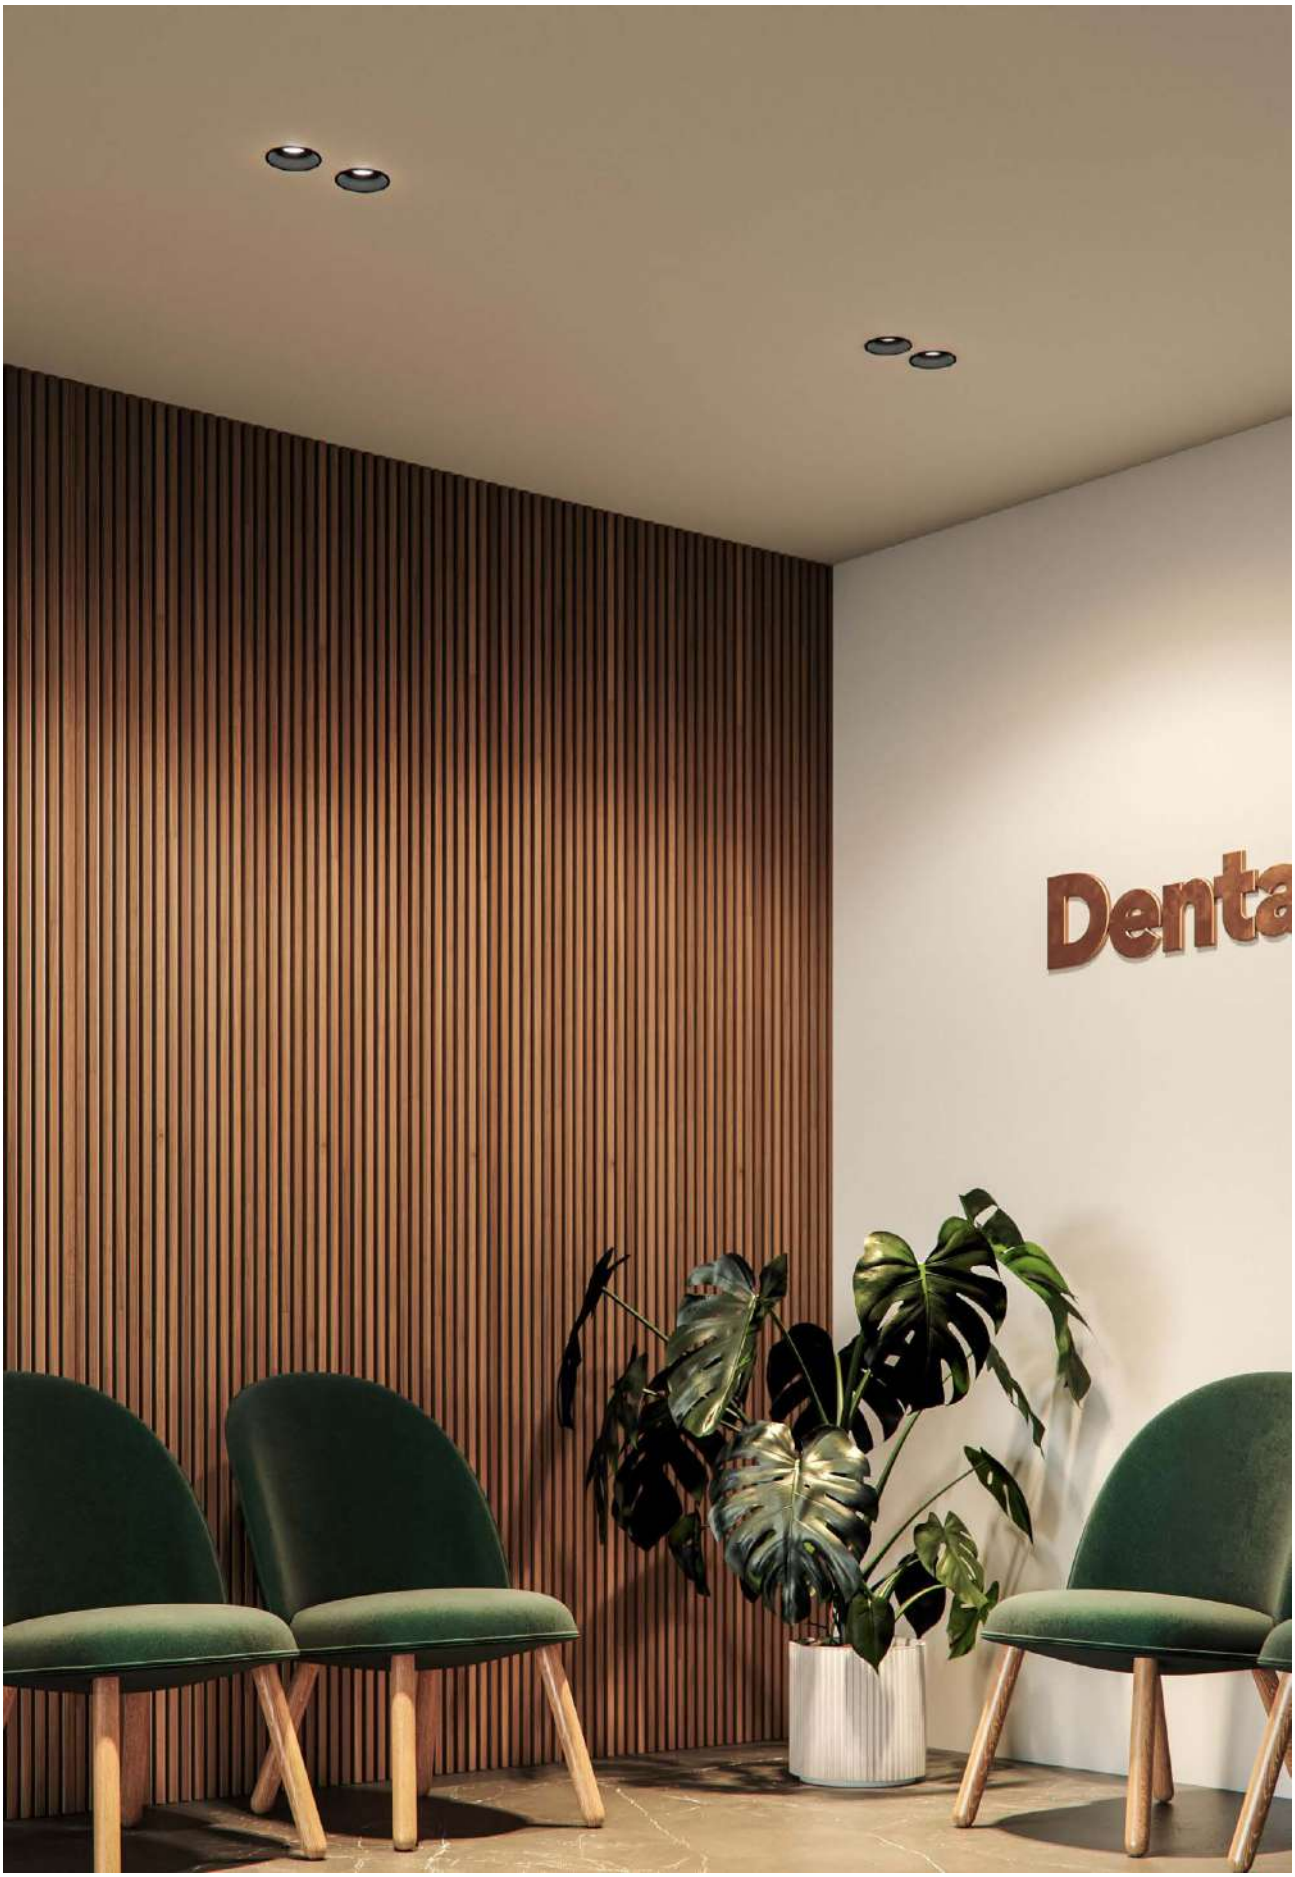
Denta

Tao recessed





Technical Information

Power	10W
Installation	Recessed
Color Temperature	3.000K / 4.000K
Lumens	925 lm / 1.000 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	3.000K	3942
	○	4.000K	3943
	●	3.000K	3944
	●	4.000K	3945
ⓘ		Custom RAL	

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 32 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | +40°C -20°C | 1/40




Noi recessed





Noi dimm recessed





Technical Information

Power	14W	14W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White

Code		
	○ 5019	○ 3.000K 3485
		○ 4.000K 3486

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/6




Mini Thessis recessed






Thessis recessed





Thessis XL recessed





RECESSED

Technical Information

Power	15W	25W	35W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm	3.100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White
Code	○ 4766	○ 4236	○ 5030
	● 4987	● 4988	ⓘ Custom RAL
	ⓘ Custom RAL	ⓘ Custom RAL	
	UGR <19 | 1/10	UGR <19 | 1/6	1/6

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH




Mini Thessis dimm recessed





Thessis dimm recessed





Technical Information

Power	15W	25W
Installation	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black

Code		
	○ 4767	○ 4691
	● 5574 New	● 5575 New
	ⓘ Custom RAL	ⓘ Custom RAL
	1/10	1/6

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH



Air recessed





Technical Information

Power	22W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White

Code	○ 5018


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 100/277 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/6



Bonn recessed



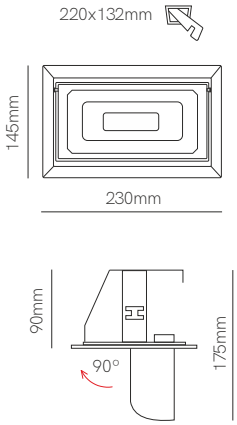

Technical Information

Power	40W
Installation	Recessed
Color Temperature	3.000K / 4.100K
Lumens	4.750 lm / 4.800 lm
Material	Aluminium
Finishes	White / Gray

Code			
	☐	3.000K	4097
	☐	4.100K	4096
	■	3.000K	4099
	■	4.100K	4098
ⓘ		Custom RAL	

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/12




Fijo recessed






Basculante recessed





Eclipse recessed





*G5.3 Bulbholder included.

Technical Information

	Fijo recessed	Basculante recessed	Eclipse recessed
Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Gray / Brushed chrome	White / Gray / Brushed chrome	Gray / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3	50mm G5.3
Code	○ 206280	○ 205280	□ 222230
	● 206284	● 205284	□ 222238
	● 206285	● 205285	ⓘ Custom RAL
	ⓘ Custom RAL	ⓘ Custom RAL	

Accessories




Bulbholder GU10

○ 301182


CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50

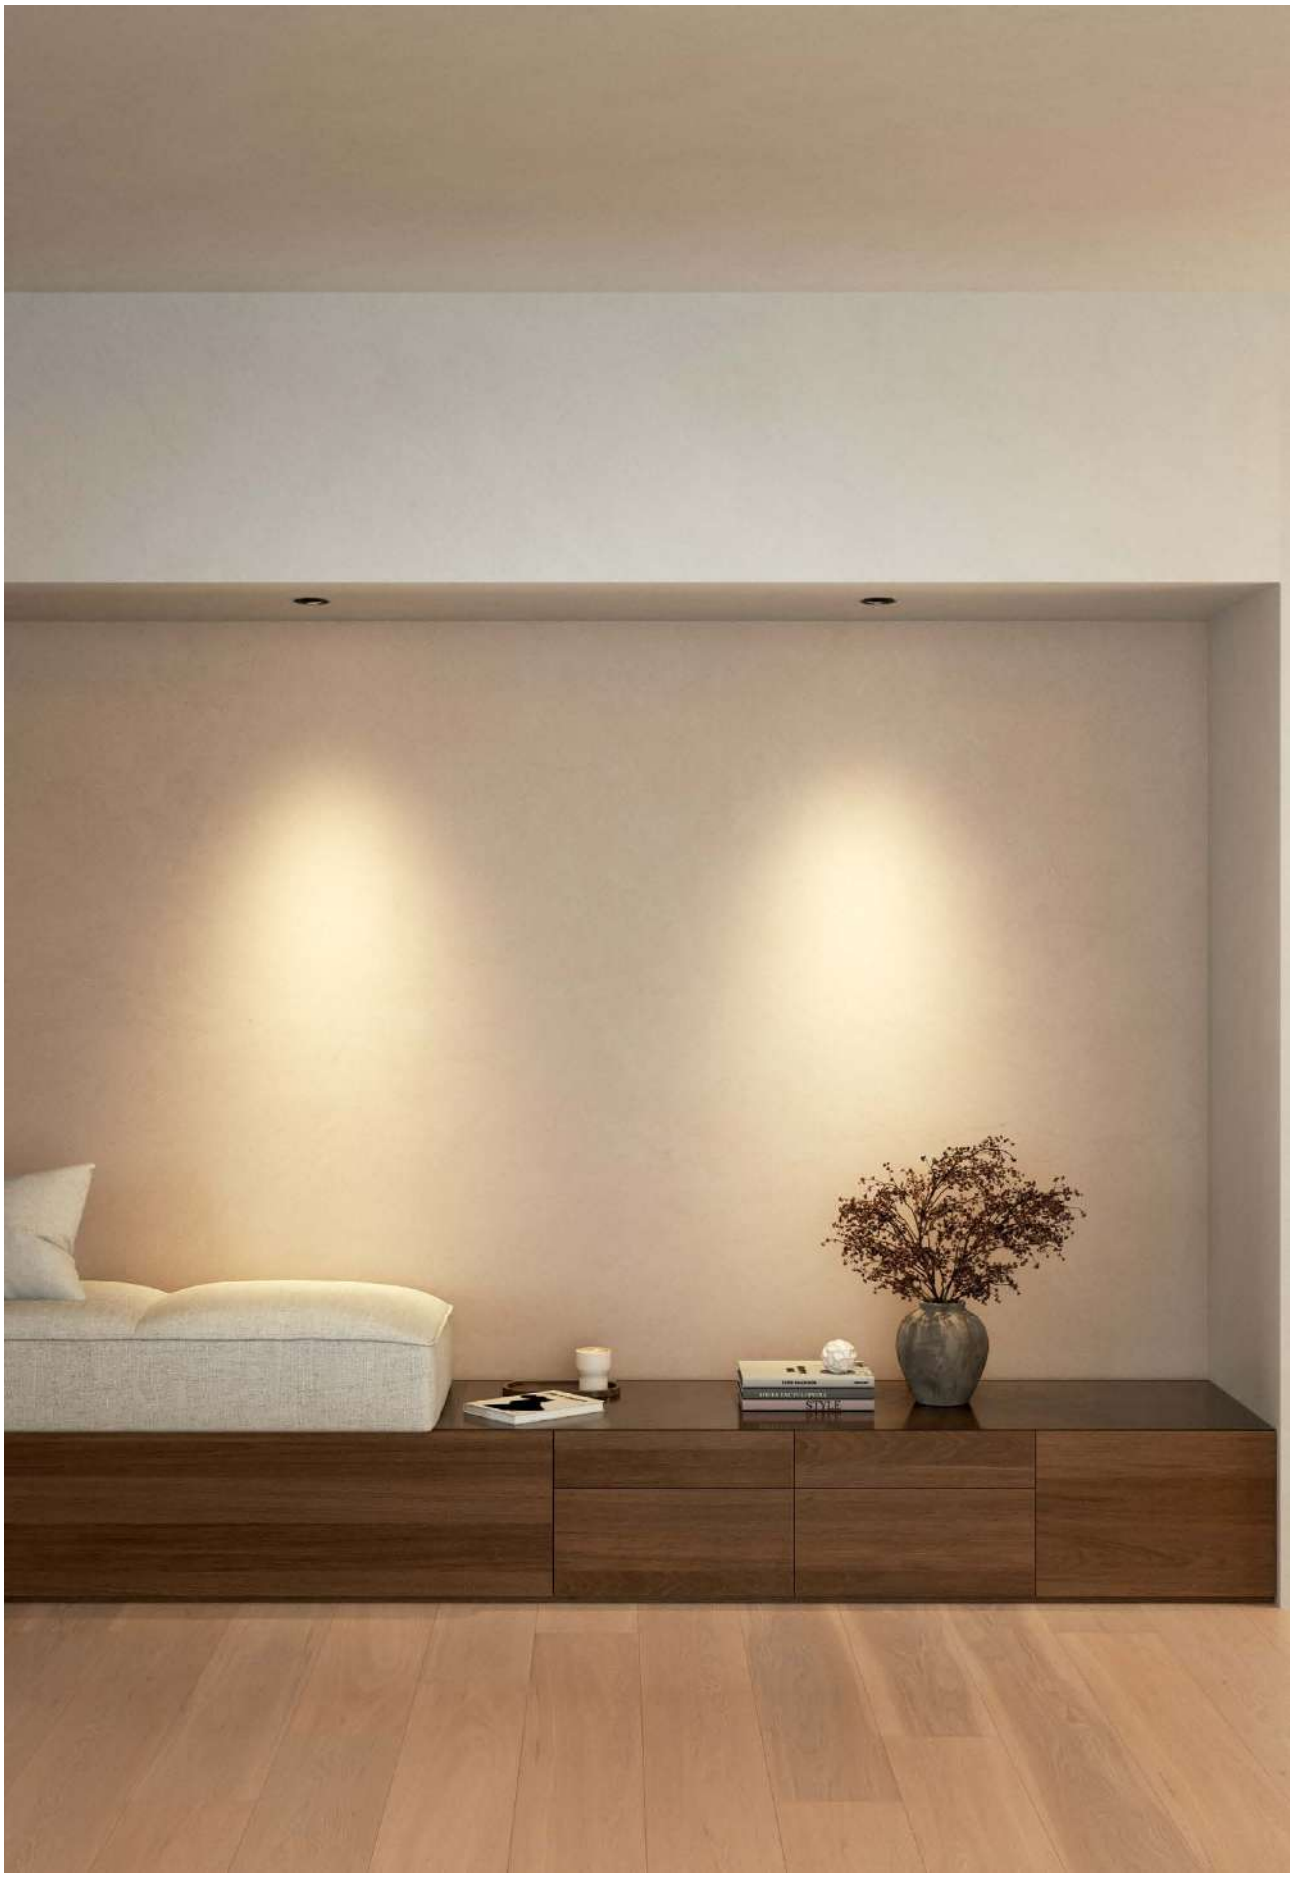
STYLE


One recessed





Zio recessed





*GU10 Bulbholder included, except 258226C and 257226C.

Technical Information

	One recessed	Zio recessed
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black / Brushed alumin.
Bulbholder	50mm GU10	50mm GU10

Code	One recessed	Zio recessed
	○ 4478	□ 4476
	● 4479	■ 4477
	○ 258226C	□ 257226C
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50




Luk r recessed






Luk r recessed IP





Luk sq recessed IP





*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.

Technical Information

Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10	50mm G5.3	50mm G5.3
Code	○ 4758	○ 5214	□ 5216
	● 4759	● 5215	■ 5217
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	IP 20	IP 65	IP 65

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 1/100

RECESSED




Bathroom recessed





Rok recessed





*G5.3 Bulbholder included.

Technical Information

	Bathroom recessed	Rok recessed
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Brushed aluminium	White / Black / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3
Code	○ 223232	○ 4755
	● 223233	● 4756
		● 4757
		ⓘ Custom RAL
	IP 44	IP 65

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50




Avant r recessed





Avant sq recessed





*GU10 Bulbholder included.

Technical Information

	Avant r recessed	Avant sq recessed
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	111mm GU10	111mm GU10
Code	○ 4486	□ 4484
	● 4487	■ 4485
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 1/20






Surface

Nano Golf surface



Mini Golf surface

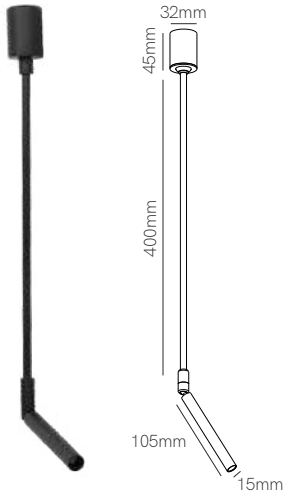

Technical Information


	Nano Golf surface	Mini Golf surface
Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5285	○	2.700K	5291
	○	3.000K	5286	○	3.000K	5292
	○	4.000K	5287	○	4.000K	5293
	●	2.700K	5288	●	2.700K	5294
	●	3.000K	5289	●	3.000K	5295
	●	4.000K	5290	●	4.000K	5296


CE RoHS EMC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/10

Golf surface

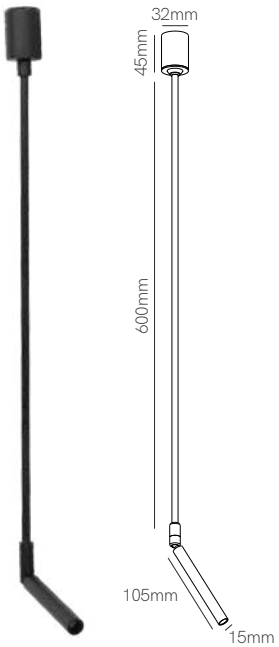

Golf XL surface

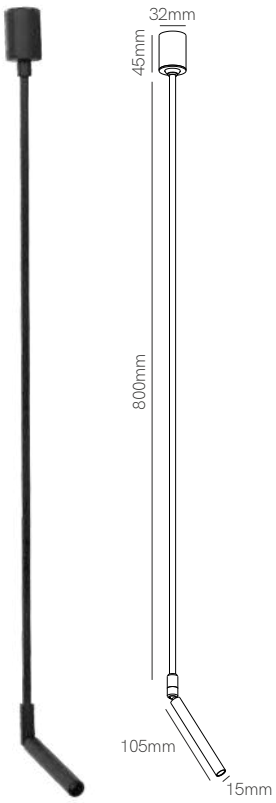

Technical Information

	Golf surface	Golf XL surface
Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5297	○	2.700K	5303
	○	3.000K	5298	○	3.000K	5304
	○	4.000K	5299	○	4.000K	5305
	●	2.700K	5300	●	2.700K	5306
	●	3.000K	5301	●	3.000K	5307
	●	4.000K	5302	●	4.000K	5308


CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/10




Mini Bora surface





Bora surface





Technical Information

	Mini Bora surface	Bora surface
Power	4,5W	8,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4621	○	2.700K	4629
	○	3.000K	4622	○	3.000K	4630
	●	2.700K	4623	●	2.700K	4631
	●	3.000K	4624	●	3.000K	4632
	●	2.700K	4625	●	2.700K	4633
	●	3.000K	4626	●	3.000K	4634
	●	2.700K	4627	●	2.700K	4635
	●	3.000K	4628	●	3.000K	4636
	UGR <10 | PF >0,5 | 38°			UGR <15 | PF >0,6 | 36°		


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



Alp surface





Technical Information

Power	4,5W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	220 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5357
	○	3.000K	5358
	●	2.700K	5360
	●	3.000K	5361

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 36° | 50/60 Hz | +40°C -20°C | 1/18



Plus surface







Technical Information


Power	8W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.040 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4522
	● 4523
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 35° 60° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20

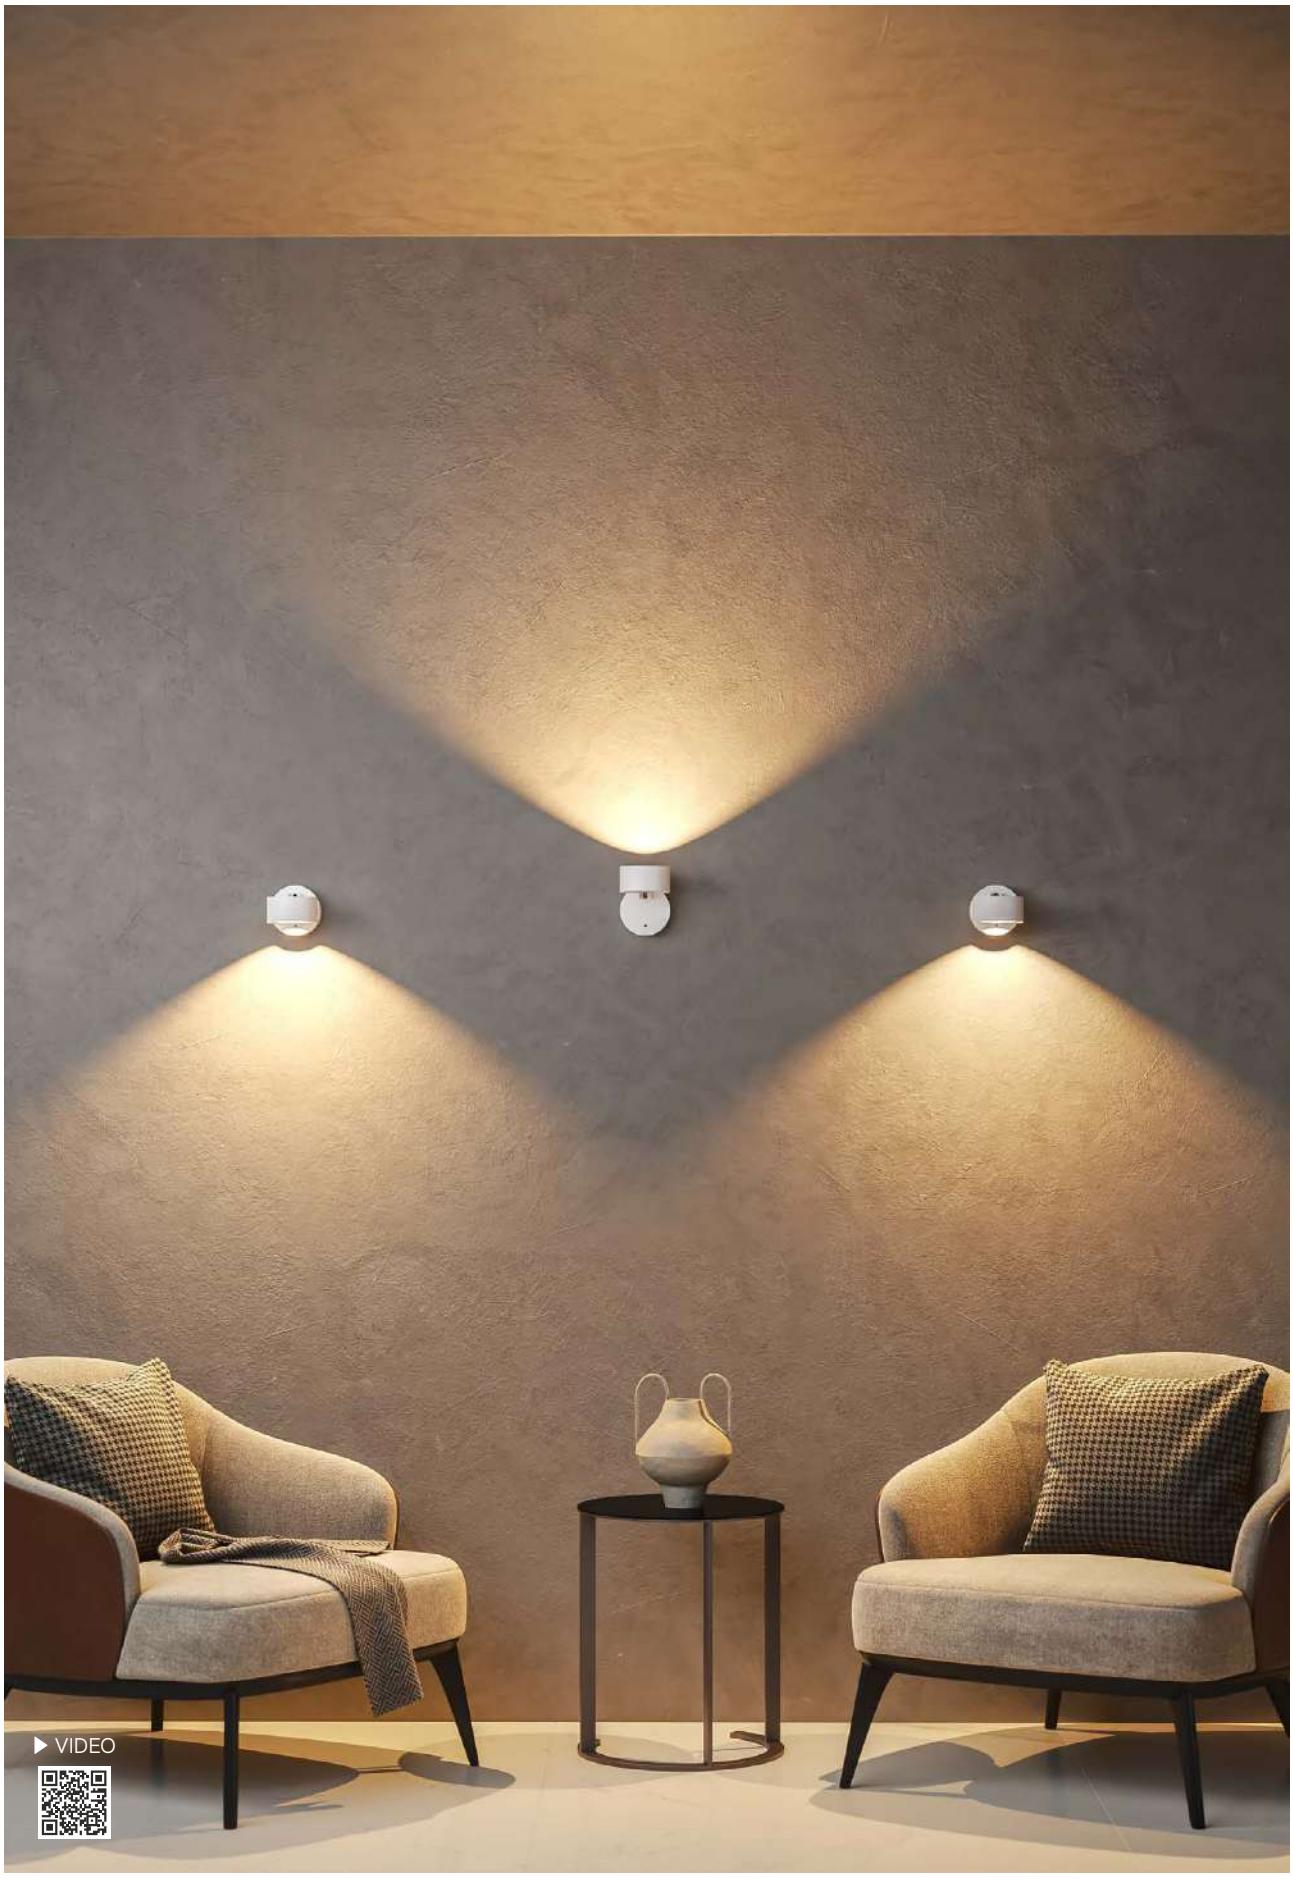
▶ VIDEO

Mini Concord surface








Concord surface







SURFACE

Technical Information


	Mini Concord surface	Concord surface
Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 4334-N	○ 5071
	● 4335-N	● 5072
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥80 | 1/30	CRI ≥97 | 1/4/12

CE RoHS


ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH

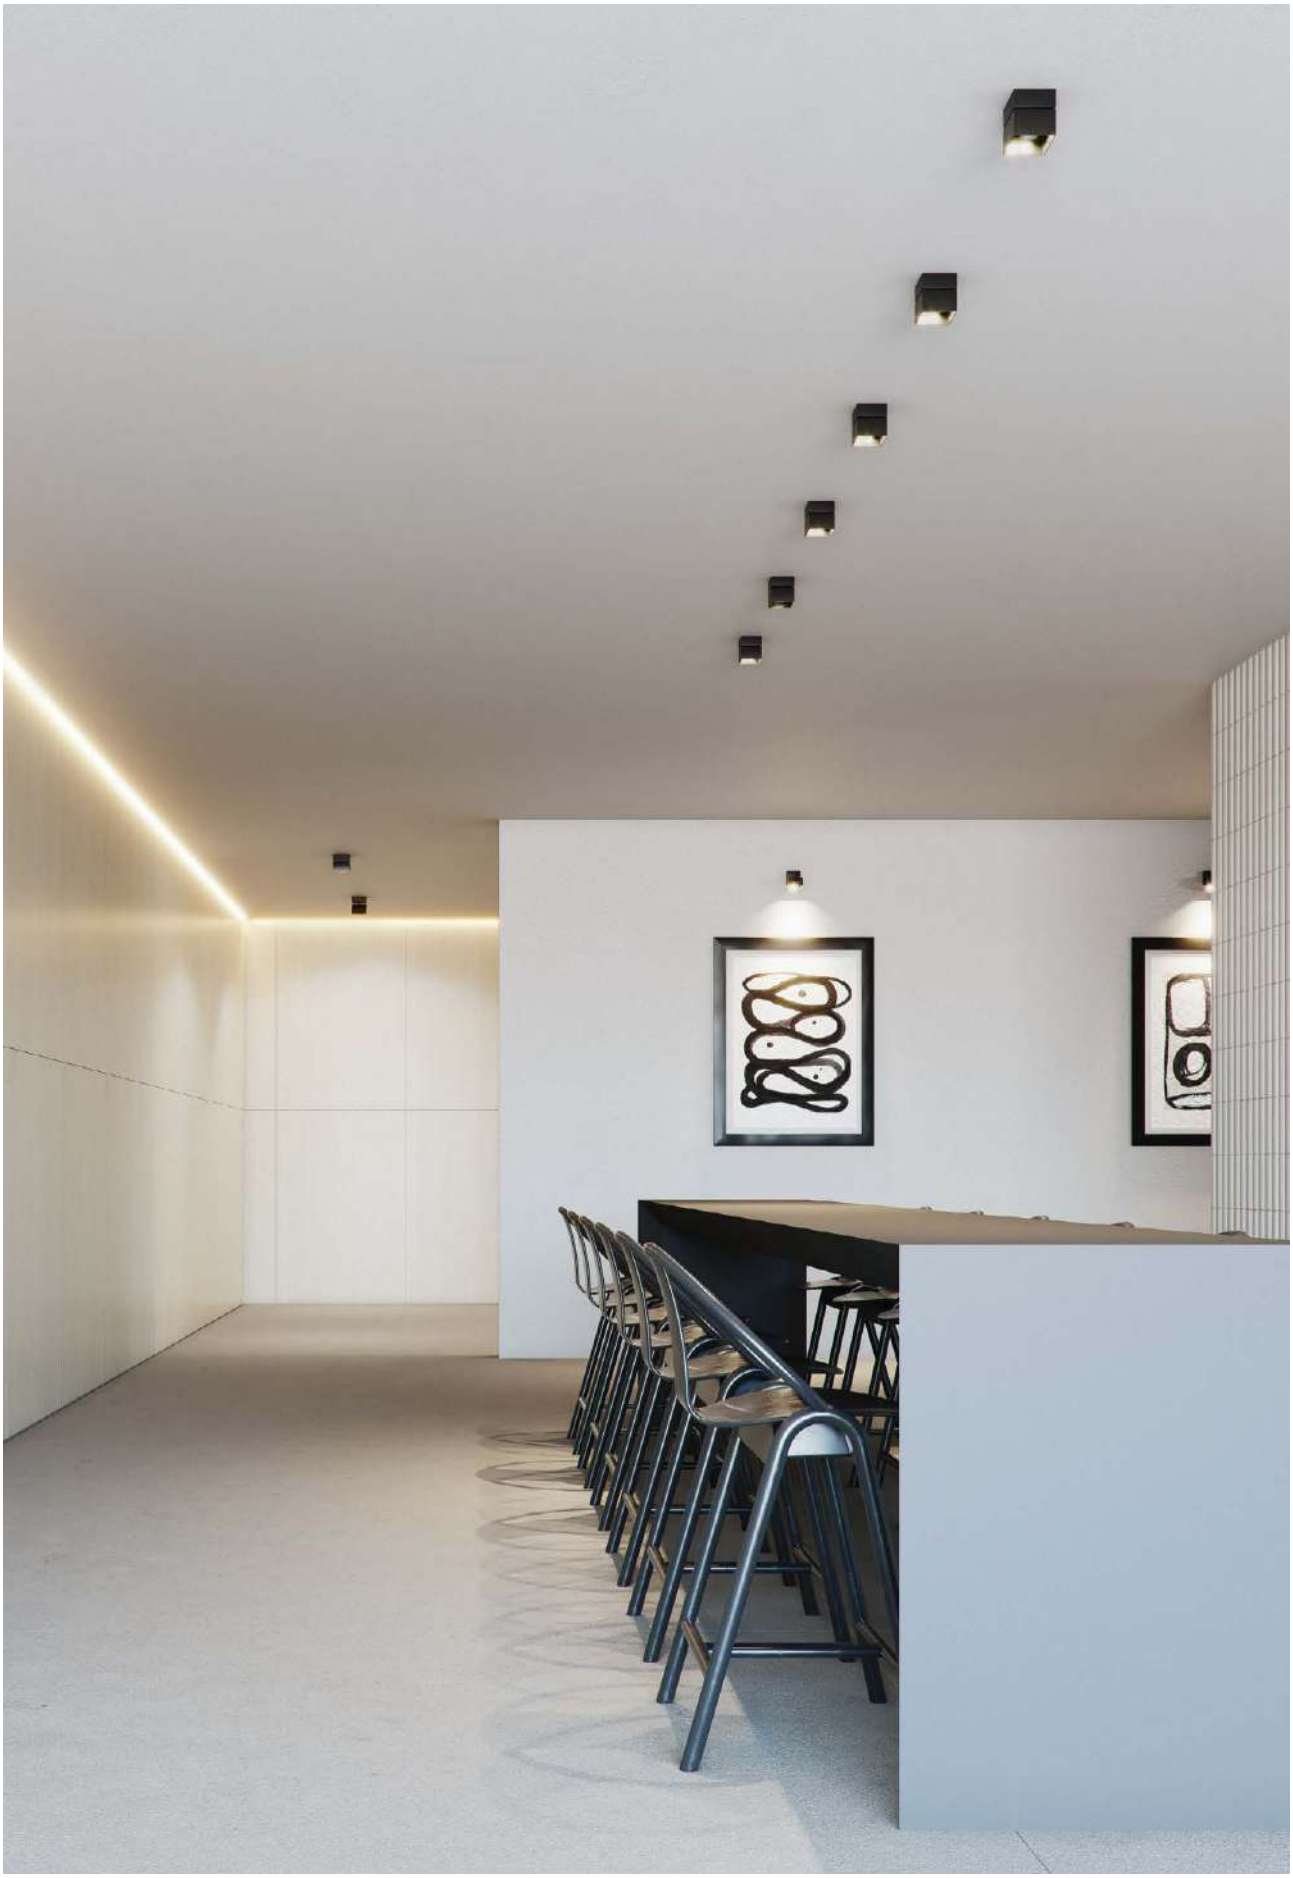

Mini Rubyc surface








Rubyc surface







SURFACE


Technical Information

	Mini Rubyc surface	Rubyc surface
Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4332-N	☐ 5069
	■ 4333-N	■ 5070
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥80 | 1/30	CRI ≥97 | 1/4/12

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH

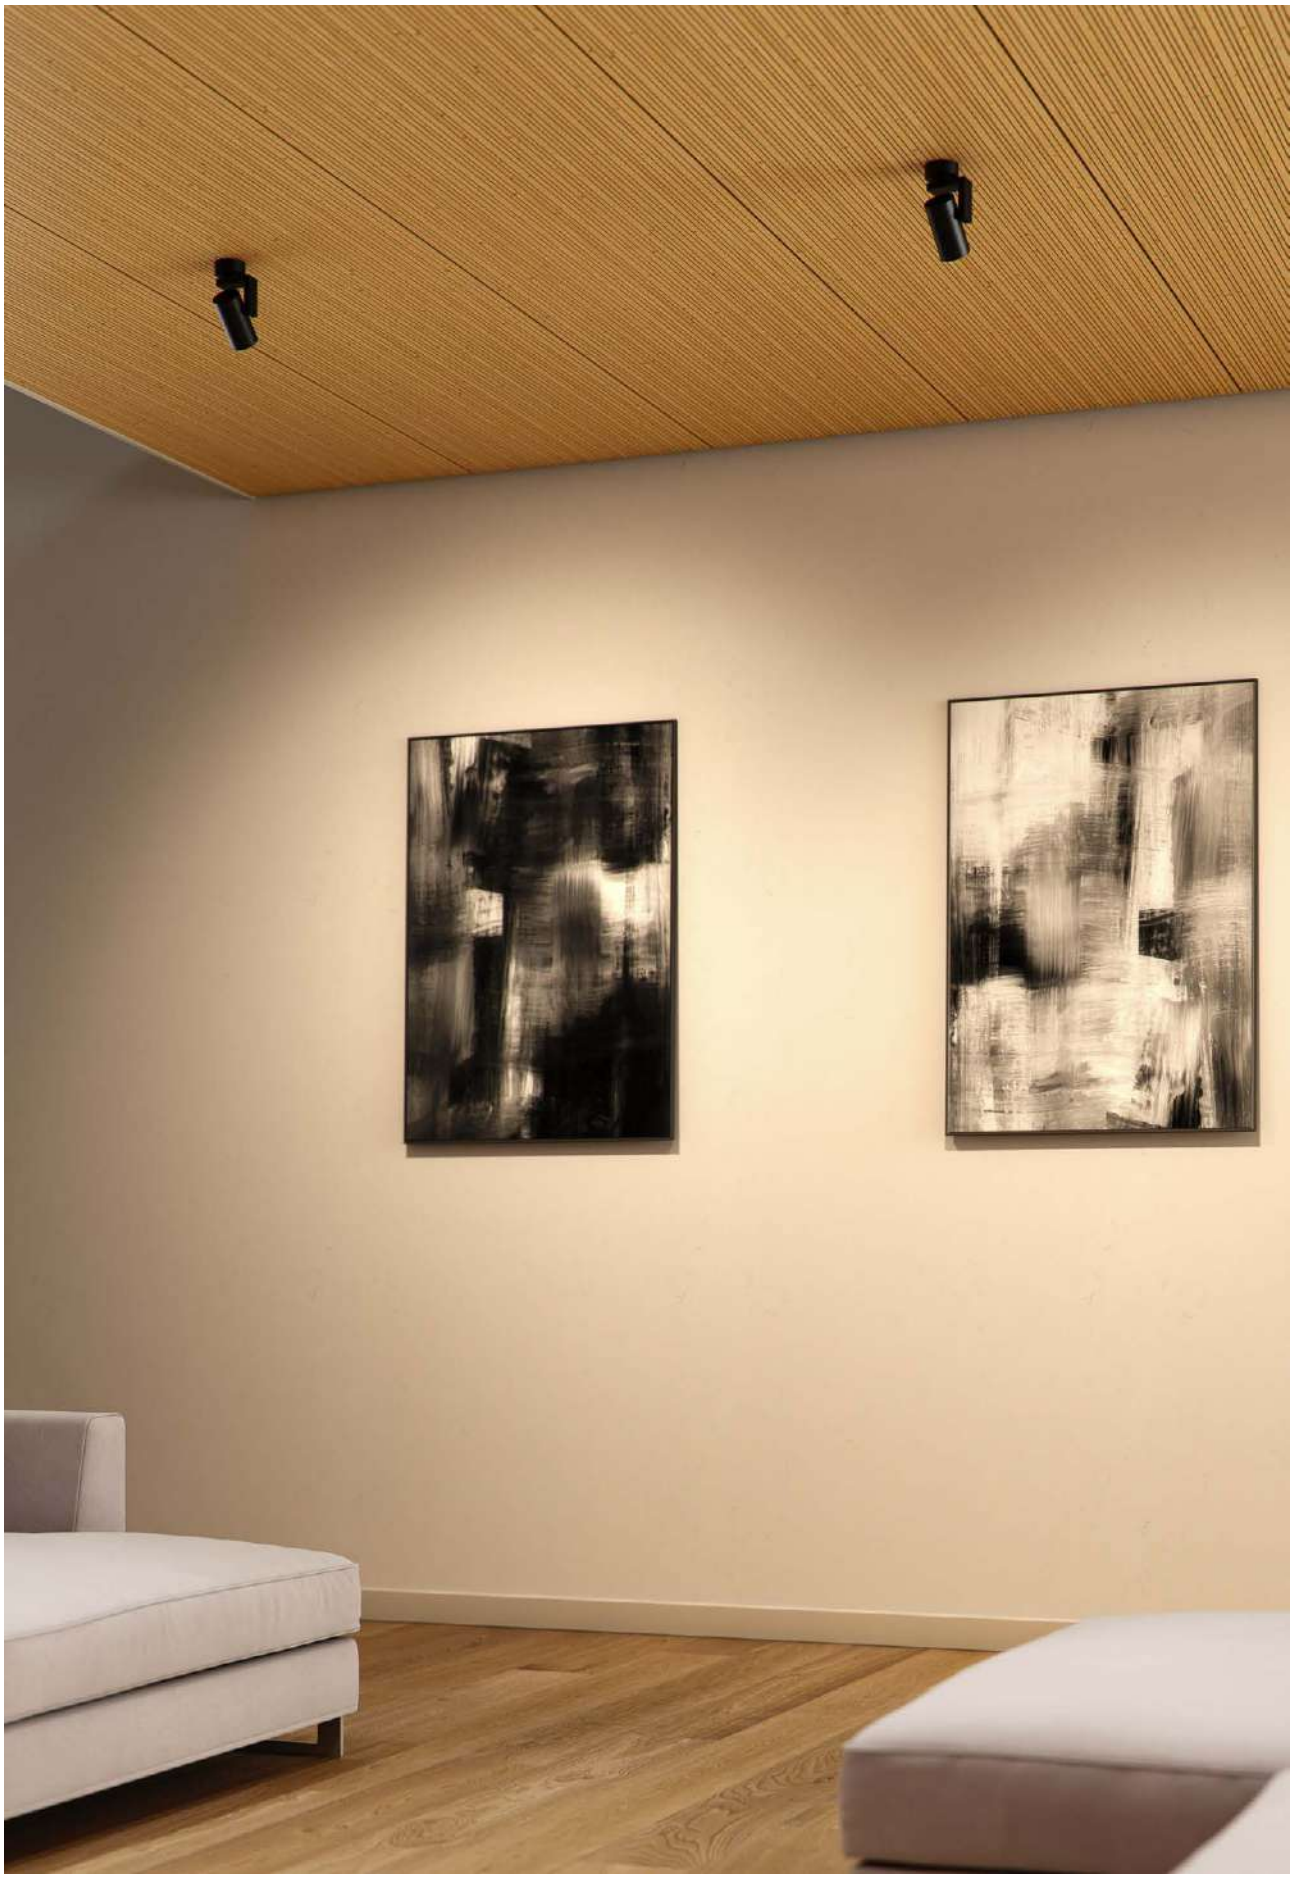


Volt r base



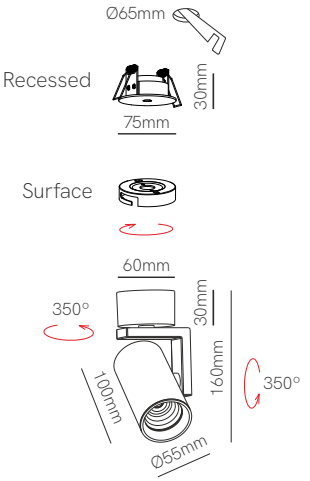

Volt sq base



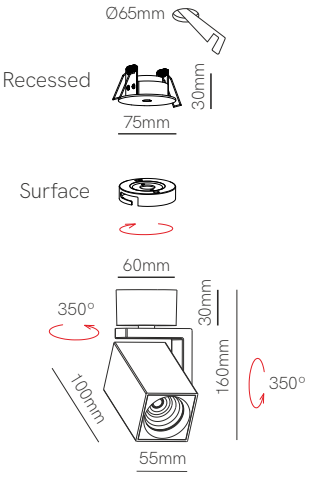

SURFACE

*Included surface base (mounted) and recessed base (not mounted).

Technical Information


	Volt r base	Volt sq base
Power	8W	8W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5041	□ 5043
	● 5042	■ 5044
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20

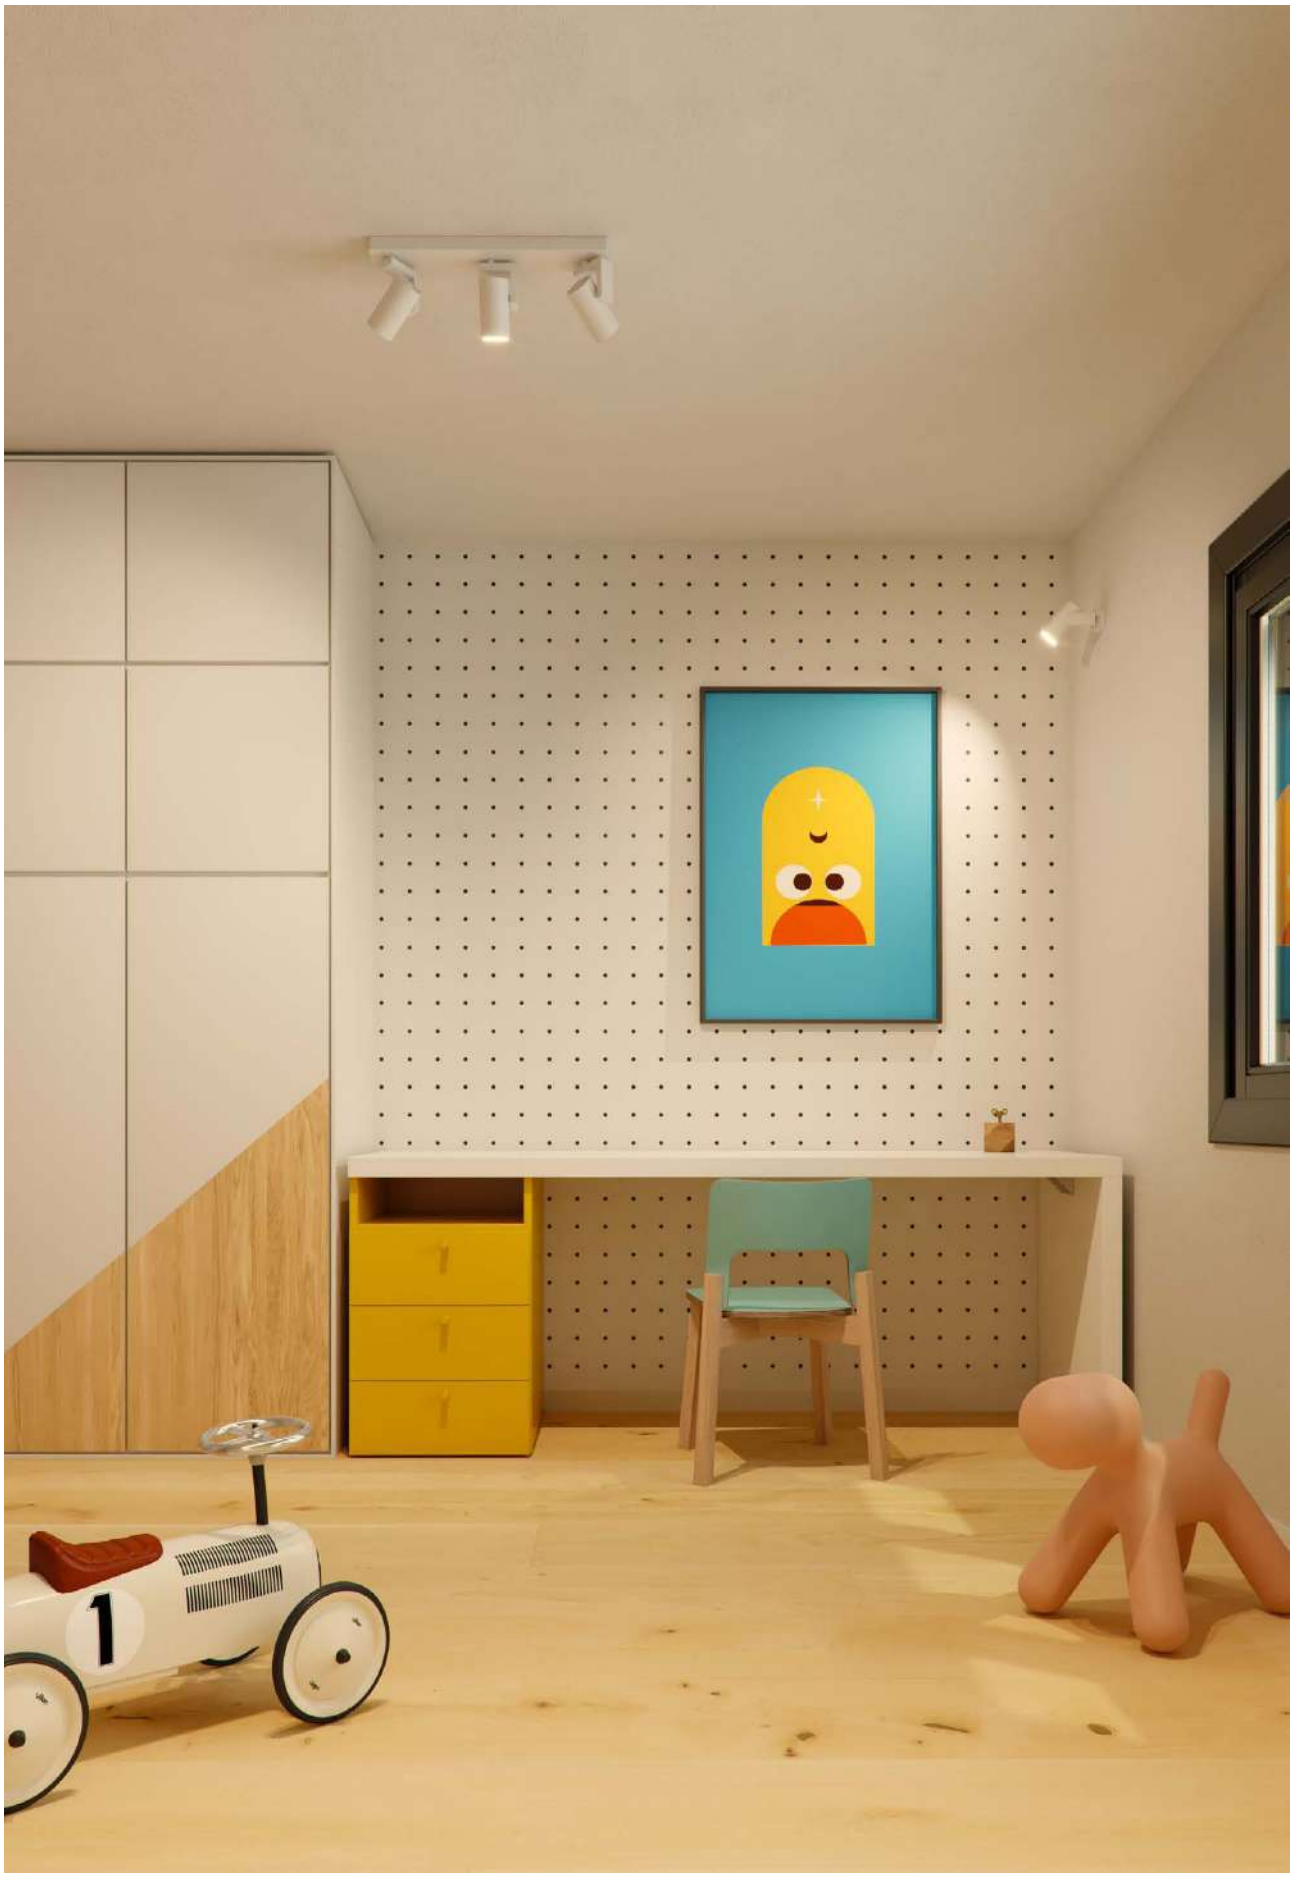
1


Volt r3 surface





Volt sq3 surface





Technical Information

Power	24W	24W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.700 lm	1.700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5045	□ 5047
	● 5046	■ 5048
	ⓘ Custom RAL	ⓘ Custom RAL


CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/10

Volt r GU10 base









Volt sq GU10 base







*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	○ 5049	□ 5051
	● 5050	■ 5052
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | IK06 | 1/20


Volt r3 GU10 surface



Volt sq3 GU10 surface







Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code	○ 5053	□ 5055
	● 5054	■ 5056
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/10



Picolo base



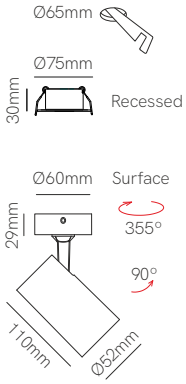

Technical Information

Power	9,5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4833
	● 4834
①	Custom RAL

CE RoHS EAC


① Consult delivery terms and conditions.
*Surface and recessed base included.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20


Dior
PRADA
RUINS


Picolo GU10 surface



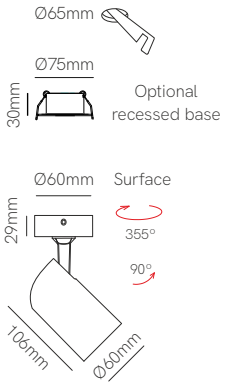

Picolo AR111 surface



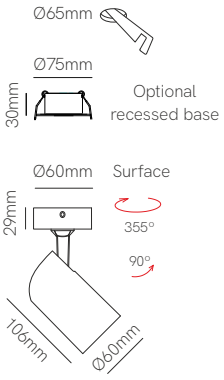

Technical Information

	Picolo GU10 surface	Picolo AR111 surface
Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10

Code		
	○ 4050	○ 4433
	● 4049	ⓘ Custom RAL
	ⓘ Custom RAL	

ⓘ Consult delivery terms and conditions.

Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS


*GU10 bulbholder included.

5 YEARS WARRANTY | IP 20 | 220/240 VAC | 1/40


▶ VIDEO

Crown base



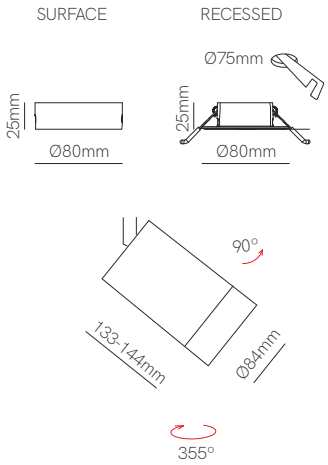

Technical Information

Power	25W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 5224
	● 5225

CE RoHS


Includes surface and recessed base (not mounted).

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20




Mini Kora r surface





Kora r surface





Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	○ 4832	○ 4500-V2


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5


iting
om
123


Mini Kora sq surface





Kora sq surface





Technical Information

	Mini Kora sq surface	Kora sq surface
Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4831	☐ 4499-V2

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

Nox surface





Technical Information

Power	30W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.460 lm
Material	Aluminium
Finishes	White / Black

Code	○ 4241-N
	● 4242-N
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Included with:
4241-N



Included with:
4241-N / 4242-N


CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥94 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8




One surface






Zio surface





Avant r surface





One / Zio

Avant

*GU10 Bulbholder included.

Technical Information

	One surface	Zio surface	Avant r surface
Installation	Surface	Surface	Surface
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 4480	□ 4482	○ 4933
	● 4481	■ 4483	● 4934
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	1/20	1/20	1/10

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 |



Suspension

Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.


Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.






The light points of the Space system can be moved away from the base and brought to any place desired though the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.

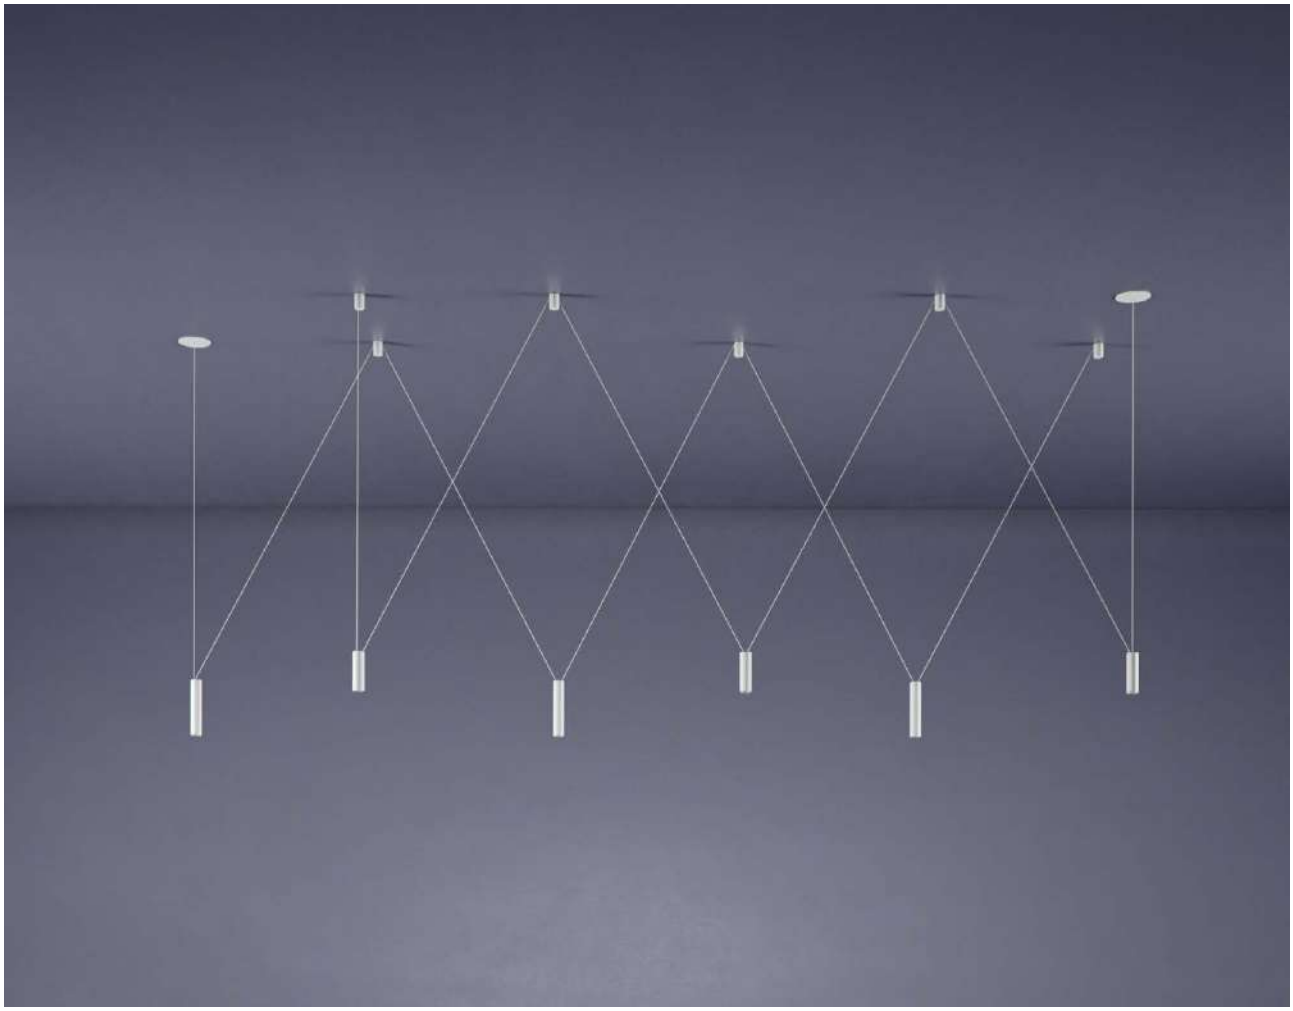

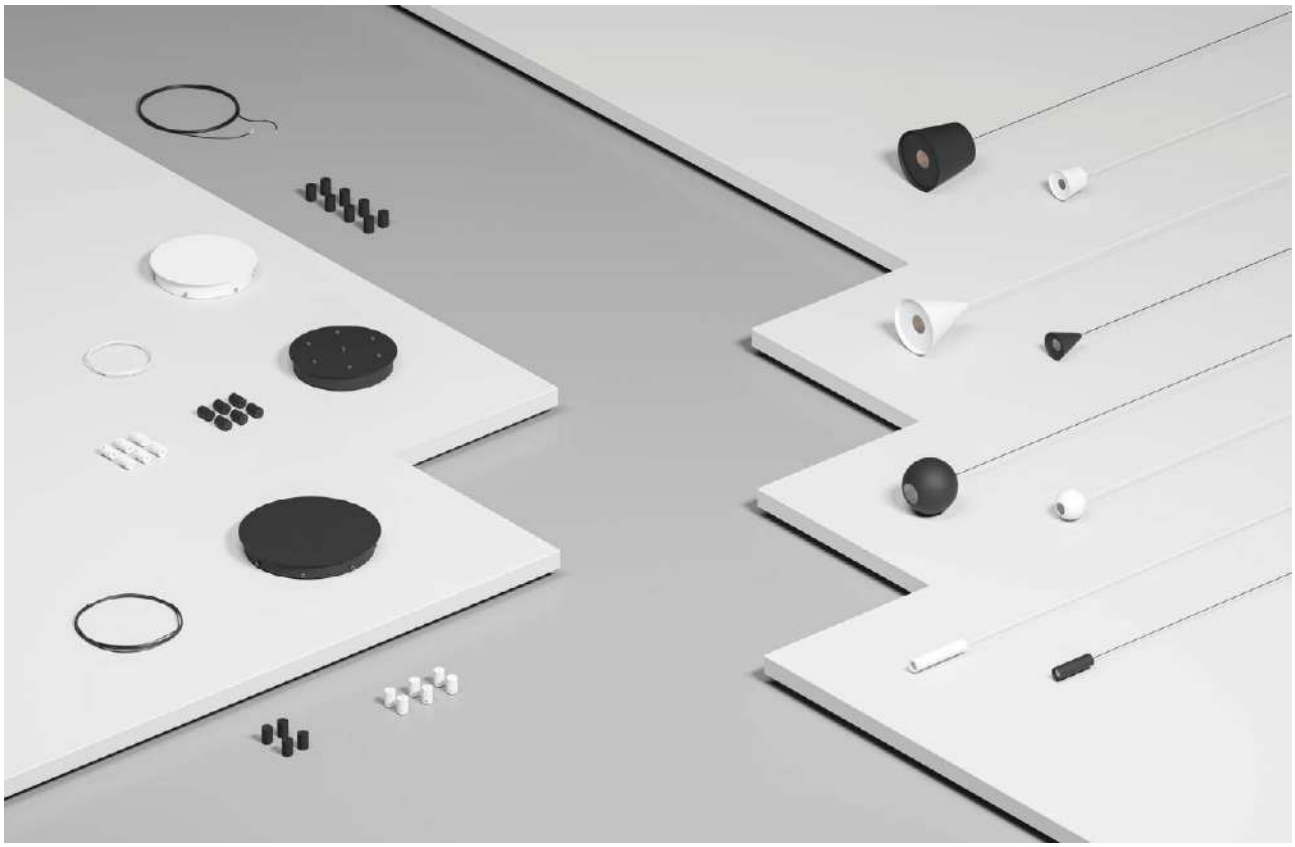



▶ VIDEO




Nano Alp space





Alp space





*Base not included. You need to choose a base to complete the instalation.

Technical Information

Power	5W	5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm	370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-42VDC/120mA	20-42VDC/120mA

Code		
	○ 5096	○ 5098
	● 5097	● 5099
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Nano surface base
Ø75x33mm
○ 5114
● 5115



Nano recessed base
Ø90x22mm / Ø80mm
○ 5116
● 5117



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/ front base | 45° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/60




Bora space	Bora XL space









*Base not included.
You need to choose a base to complete the instalation.

Technical Information

Power	8W	15W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-55VDC/150mA	20-42VDC/350mA

Code		
	○ 5084	○ 5086
	● 5085	● 5087
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/20

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC


*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH




Lievo space





Lievo XL space





*Base not included.
You need to choose a base to complete the instalation.

Technical Information

Power	8W	15W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-55VDC/150mA	20-42VDC/350mA

Code		
	○ 5088	○ 5090
	● 5089	● 5091
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC


*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20




Zoe space





Zoe XL space





*Base not included.
You need to choose a base to complete the instalation.

Technical Information

Power	8W	15W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-55VDC/150mA	20-42VDC/350mA

Code		
	△ 5092	△ 5094
	▲ 5093	▲ 5095
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH





Space - Side base

Side base

Base Ø250x41mm



Code	
Code	**S1**

Product	
Bora	**1**
Zoe	**3**
Lievo	**5**
Alp	**7**
Nano Alp	**8**

Units	
2 units	**2**
3 units	**3**
4 units	**4**
5 units	**5**
6 units	**6**

Driver	
On / Off	**1**
Dali	**2**
Triac	**3**
Casambi	**5**

Color	
○ White	**1**
● Black	**2**
ⓘ Custom RAL	

Code: **S1**

Base Ø280x41mm



Code	
Code	**S2**

Product	
Bora	**1**
Zoe	**3**
Lievo	**5**
Alp	**7**
Nano Alp	**8**

Units	
2 units	**2**
3 units	**3**
4 units	**4**
5 units	**5**
6 units	**6**

Driver	
On / Off	**1**
Dali	**2**
Triac	**3**
Casambi	**5**

Color	
○ White	**1**
● Black	**2**
ⓘ Custom RAL	

Code: **S2**

Base Ø330x41mm



Code	
Code	**S3**

Product	
Bora	**1**
Bora XL	**2**
Zoe	**3**
Zoe XL	**4**
Lievo	**5**
Lievo XL	**6**
Alp	**7**
Nano Alp	**8**

Units	
2 units	**2**
3 units	**3**
4 units	**4**
5 units	**5**
6 units	**6**
7 units	**7**
8 units	**8**

Driver	
On / Off	**1**
Dali	**2**
Triac	**3**
Casambi	**5**

Color	
○ White	**1**
● Black	**2**
ⓘ Custom RAL	

Code: **S3**

ⓘ Consult delivery terms and conditions.

Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1





Space - Front base

Front base

Base Ø250x41mm



Code	
Code	F1

Product	
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: **F1**

Base Ø280x41mm



Code	
Code	F2

Product	
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: **F2**

Base Ø330x41mm



Code	
Code	F3

Product	
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6
7 units	7
8 units	8

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: **F3**

Base Ø330x41mm



Code	
Code	F3

Product	
Bora XL	2
Zoe XL	4
Lievo XL	6

Units	
2 units	2
3 units	3

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: **F3**

ⓘ Consult delivery terms and conditions.

Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129


CE RoHS


*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1




Ark suspension surface

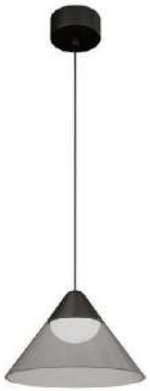



Ark suspension recessed





Technical Information

	Ark suspension surface	Ark suspension recessed
Power	6W	6W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	350 lm / 360 lm	350 lm / 360 lm
Material	Aluminium and acrylic	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray	White-transparent / Black-transparent / Black-gray

Code	Ark suspension surface	Ark suspension recessed
	4814 White-transp. 2.700K	4808 White-transp. 2.700K
	4815 White-transp. 3.000K	4809 White-transp. 3.000K
	4816 Black-transp. 2.700K	4810 Black-transp. 2.700K
	4817 Black-transp. 3.000K	4811 Black-transp. 3.000K
	4818 Black-gray 2.700K	4812 Black-gray 2.700K
	4819 Black-gray 3.000K	4813 Black-gray 3.000K


CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | | 90° | 50/60 Hz | +40°C -20°C | 1/12




Atmos slim suspension





Atmos slim XL suspension



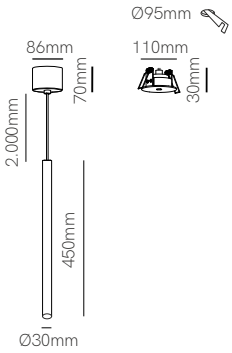

*Need Tuya Smart App to work.

Technical Information

	Atmos slim suspension	Atmos slim XL suspension
Power	6W	6W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Tuya 2.700K - 4.000K	Tuya 2.700K - 4.000K
Lumens	460 lm	460 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome

Code		
	○ 4930	○ 4750
	● 4931	● 4751
	○ 4932	○ 4752
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
☐ 4956

CE RoHS


*See page 292 for Gateway additional info.
*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C -10°C | IK03 | tuya | 1/10




Atmos suspension





Atmos XL suspension



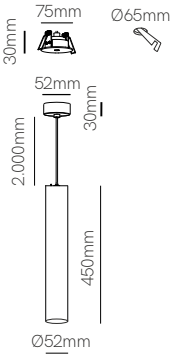

Technical Information

	Atmos suspension	Atmos XL suspension
Power	7W	10W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome

Code		
	○ 4461	○ 4463
	● 4462	● 4464
	○ 4952	○ 4953
	ⓘ Custom RAL	ⓘ Custom RAL
	1/8	1/4

ⓘ Consult delivery terms and conditions.

Accessories

Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464

CE RoHS EMC


*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH


bauhaus
CHANEL
CHANEL
Vermeer
CHANEL
TOM FORD


Atmos GU10 suspension



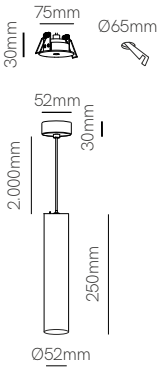

Atmos GU10 XL suspension



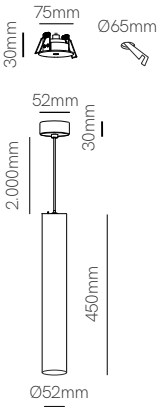

*All versions included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	○ 4465	○ 4467
	● 4466	● 4468
	○ 4954	○ 4955
	ⓘ Custom RAL	ⓘ Custom RAL
	1/8	1/4

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 220/240 VAC



Alexis Baudin restaurant, Malling (France). Architecture: XXI LOUUIS STUDIO. Photography: ACTE Photographique.


Zoe suspension surface





Zoe suspension recessed





Technical Information

	Zoe suspension surface	Zoe suspension recessed
Power	7W	7W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	360 lm / 370 lm	360 lm / 370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	△	2.700K	4803	△	2.700K	4799
	△	3.000K	4804	△	3.000K	4800
	▲	2.700K	4805	▲	2.700K	4801
	▲	3.000K	4806	▲	3.000K	4802

CE RoHS EMC


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 38° | 50/60 Hz | +40°C -20°C | 1/36


▶ VIDEO

New

Mini Hat suspension surface




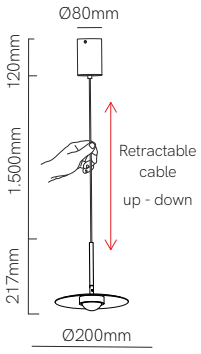

New


Mini Hat suspension recessed



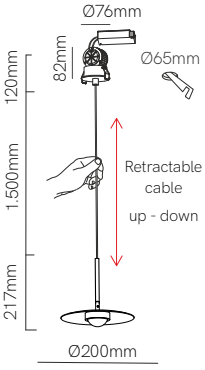


Hat suspension surface



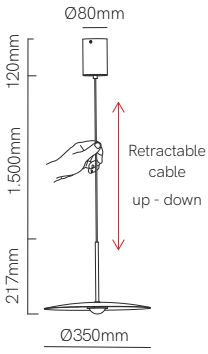

Hat suspension recessed



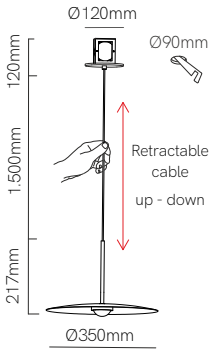

Technical Information

Power	8W	8W	8W	8W
Installation	Surface	Recessed	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	800lm	835 lm	835 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black

Code												
	○	2.700K	5710	○	2.700K	5706	○	2.700K	5345	○	2.700K	5351
	○	3.000K	5712	○	3.000K	5708	○	3.000K	5346	○	3.000K	5352
	●	2.700K	5711	●	2.700K	5707	●	2.700K	5348	●	2.700K	5354
	●	3.000K	5713	●	3.000K	5709	●	3.000K	5349	●	3.000K	5355
	70°		1/10	70°		1/10	83°		1/5	83°		1/5

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,6 | CRI ≥90 | 50/60 Hz | +40°C -20°C




Bora suspension surface





Bora suspension recessed





Technical Information

	Bora suspension surface	Bora suspension recessed
Power	8,5W	8,5W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	530 lm / 540 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4605	○	2.700K	4613
	○	3.000K	4606	○	3.000K	4614
	●	2.700K	4607	●	2.700K	4615
	●	3.000K	4608	●	3.000K	4616
	●	2.700K	4609	●	2.700K	4617
	●	3.000K	4610	●	3.000K	4618
	●	2.700K	4611	●	2.700K	4619
	●	3.000K	4612	●	3.000K	4620


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C -20°C | 1/18



Cookie suspension base



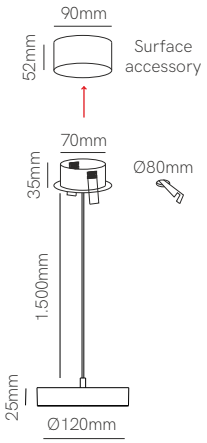

*Includes surface and recessed base.

Technical Information

Power	12W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 5183
	● 5184
ⓘ	Custom RAL


CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20




Tot suspension / surface

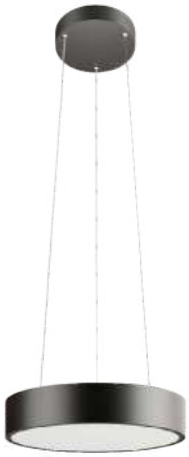


Tot XL suspension / surface



Surface



Suspension



Suspension



Surface

*Need Tuya Smart App to work.

Technical Information

Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.400 lm	5.900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black

Code		
	○ 4902	○ 4904
	● 4903	● 4905
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi

☐ 4956

CE RoHS

*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | +50°C -20°C | tuya | 1

SUSPENSION






Wall


▶ VIDEO

Lao







Recessed box included
66mm x Ø73mm



White and black cover included

*Recessed box, white and black cover included.

Technical Information

Power	1,5W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	20 lm
Material	Aluminium
Finishes	White / Black

Code	☐ ■ 5027
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | +45°C -20°C | 6 - 8m | ON OFF | OFF 30 sec | CCT SWITCH | 1/50


WALL



Ilo









Skin







*Recessed box included.

Technical Information


	Ilo	Skin
Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	60 lm	60 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 4126	□ 4108
	● 4127	■ 4109
	ⓘ Custom RAL	ⓘ Custom RAL


CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK07 | +50°C -20°C | 1/50

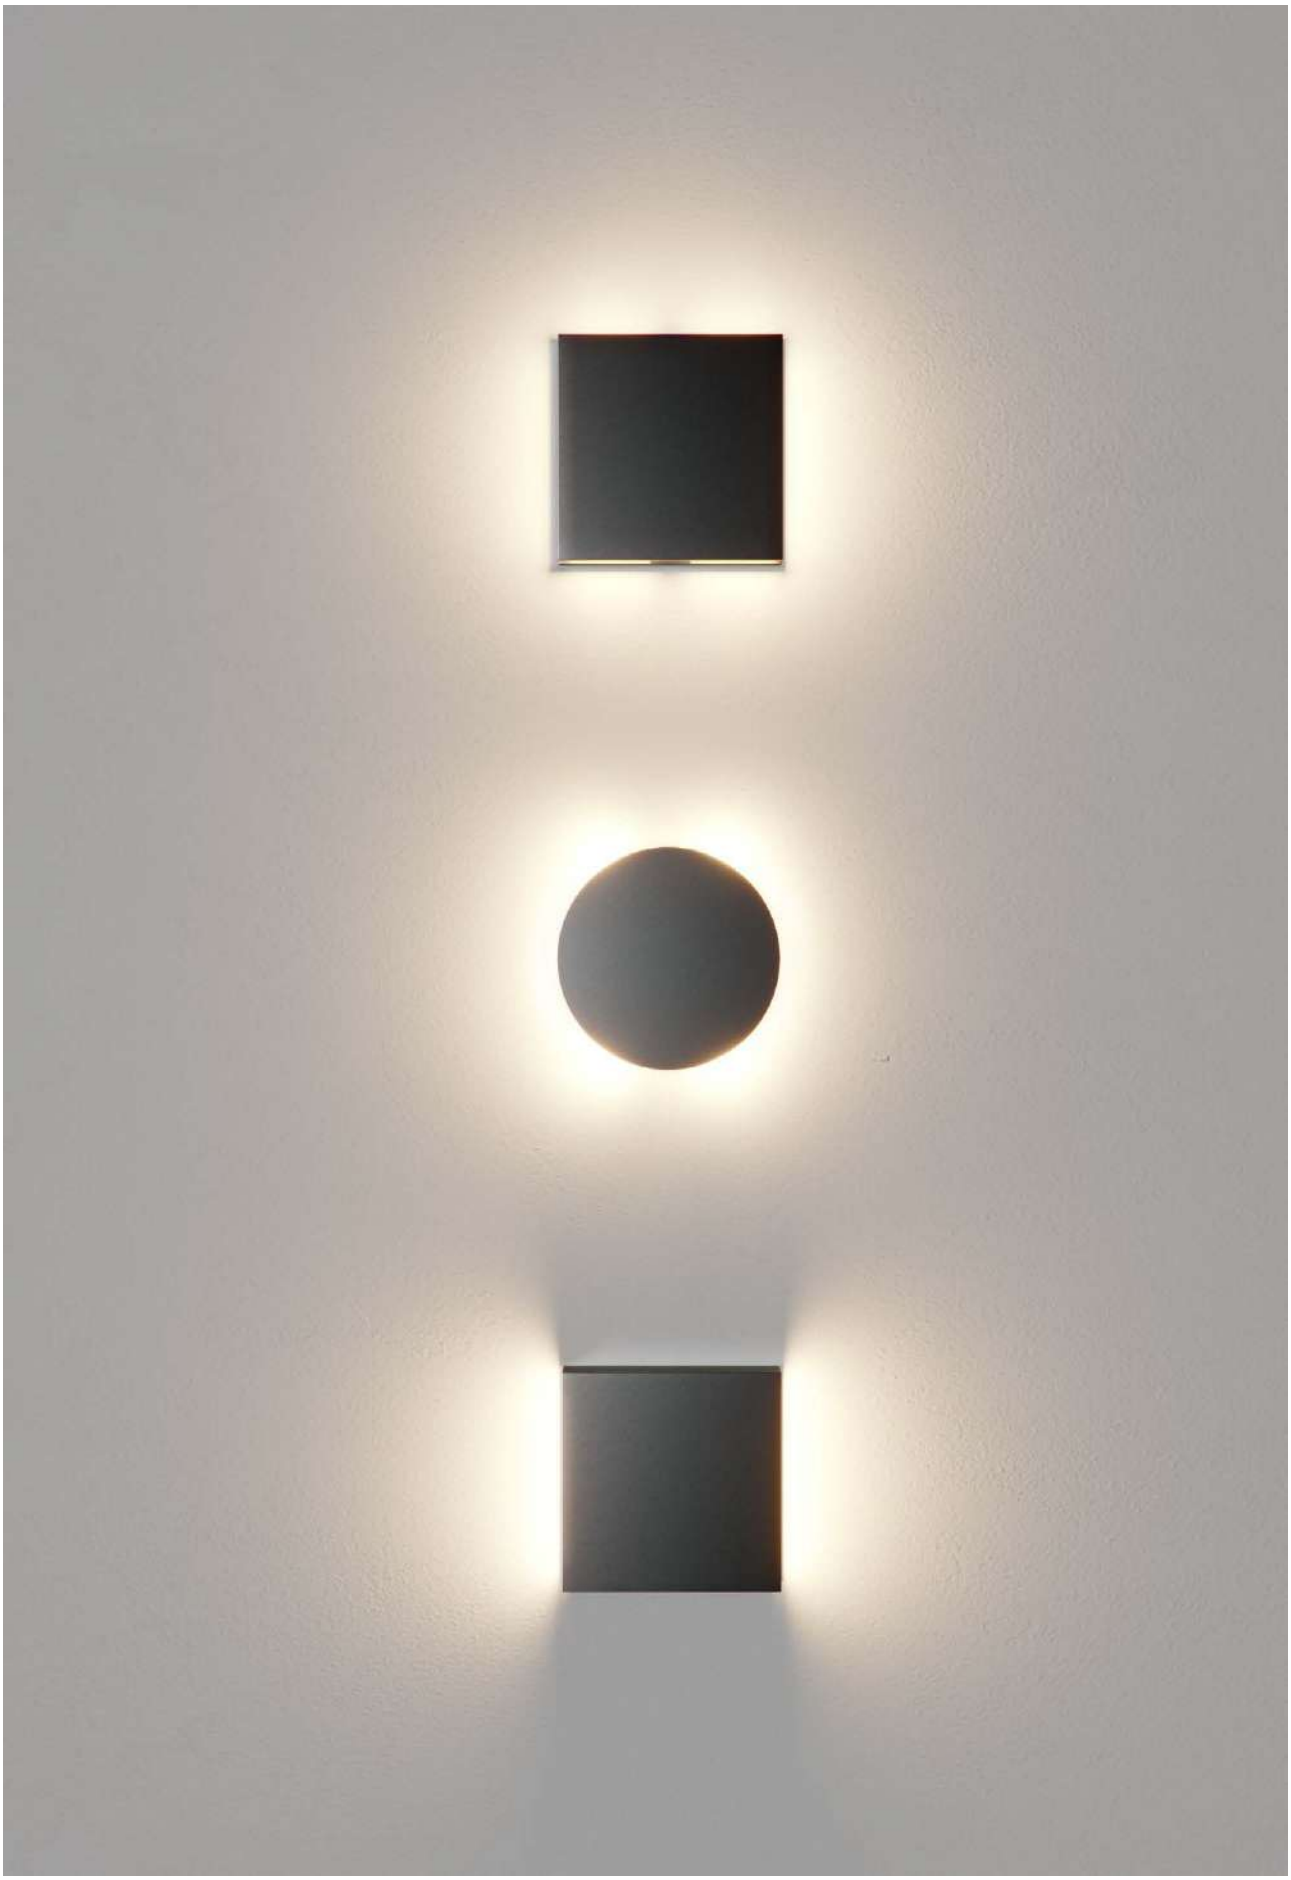



Port







Grow





Steps





*Recessed box included.

Technical Information

	Port	Grow	Steps
Power	4W	4W	4W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	60 lm	60 lm	60 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 4112	○ 4106	☐ 4110
	■ 4113	● 4107	■ 4111
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	120° ☐	120° ○	120° ☐

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK07 | +50°C -20°C | 1/50


WALL






Polo





Luky





Technical Information

	Polo	Luky
Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.200K / 4.000K	3.200K / 4.000K
Lumens	90 lm / 96 lm	90 lm / 96 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	3.200K	3995	□	3.200K	3999
	○	4.000K	3996	□	4.000K	4000
	●	3.200K	3997	■	3.200K	4001
	●	4.000K	3998	■	4.000K	4002
	ⓘ	Custom RAL		ⓘ	Custom RAL	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 50.000 HOURS | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/200

WALL






Ina







Dis








Nix







Technical Information

	Ina	Dis	Nix
Power	2W	2W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	55 lm	55 lm	55 lm
Material	Inox 304	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox	Brushed Inox
Code	4367	4368	4369

1.000Kg | 1.000Kg | 1.000Kg

Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS EMC

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C -20°C | 1/50


WALL



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.


Mis r wall





Mis sq wall





Technical Information


	Mis r wall	Mis sq wall
Power	3W	3W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm	140 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Mis r wall	Mis sq wall
	○ 5020	□ 5023
	● 5021	■ 5024
	● 5022	■ 5025
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EMC

*Integrated driver.
ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10/50

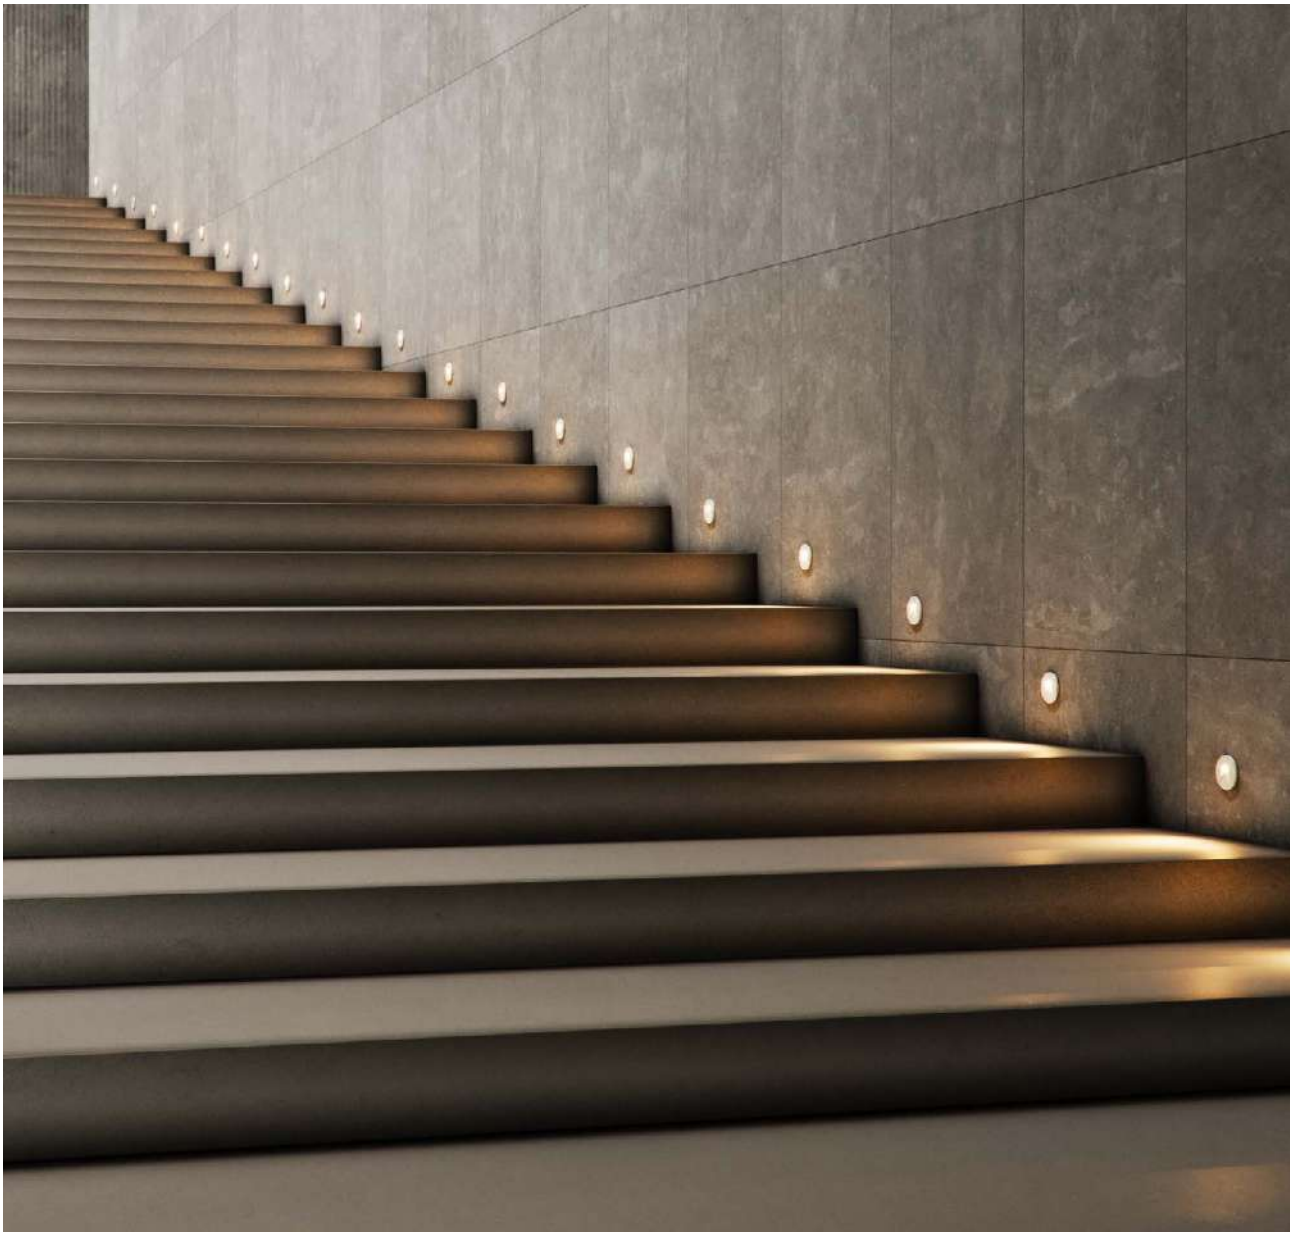



Pun





Ø73mm



Recessed box included
66mm x Ø73mm



White and black cover included

Technical Information

Power	3W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	65 lm
Material	Aluminium
Finishes	White / Black


Code	○ ● 5029
ⓘ	Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 85/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | IK07 | +45°C -20°C | CCT SWITCH | 1/50

WALL

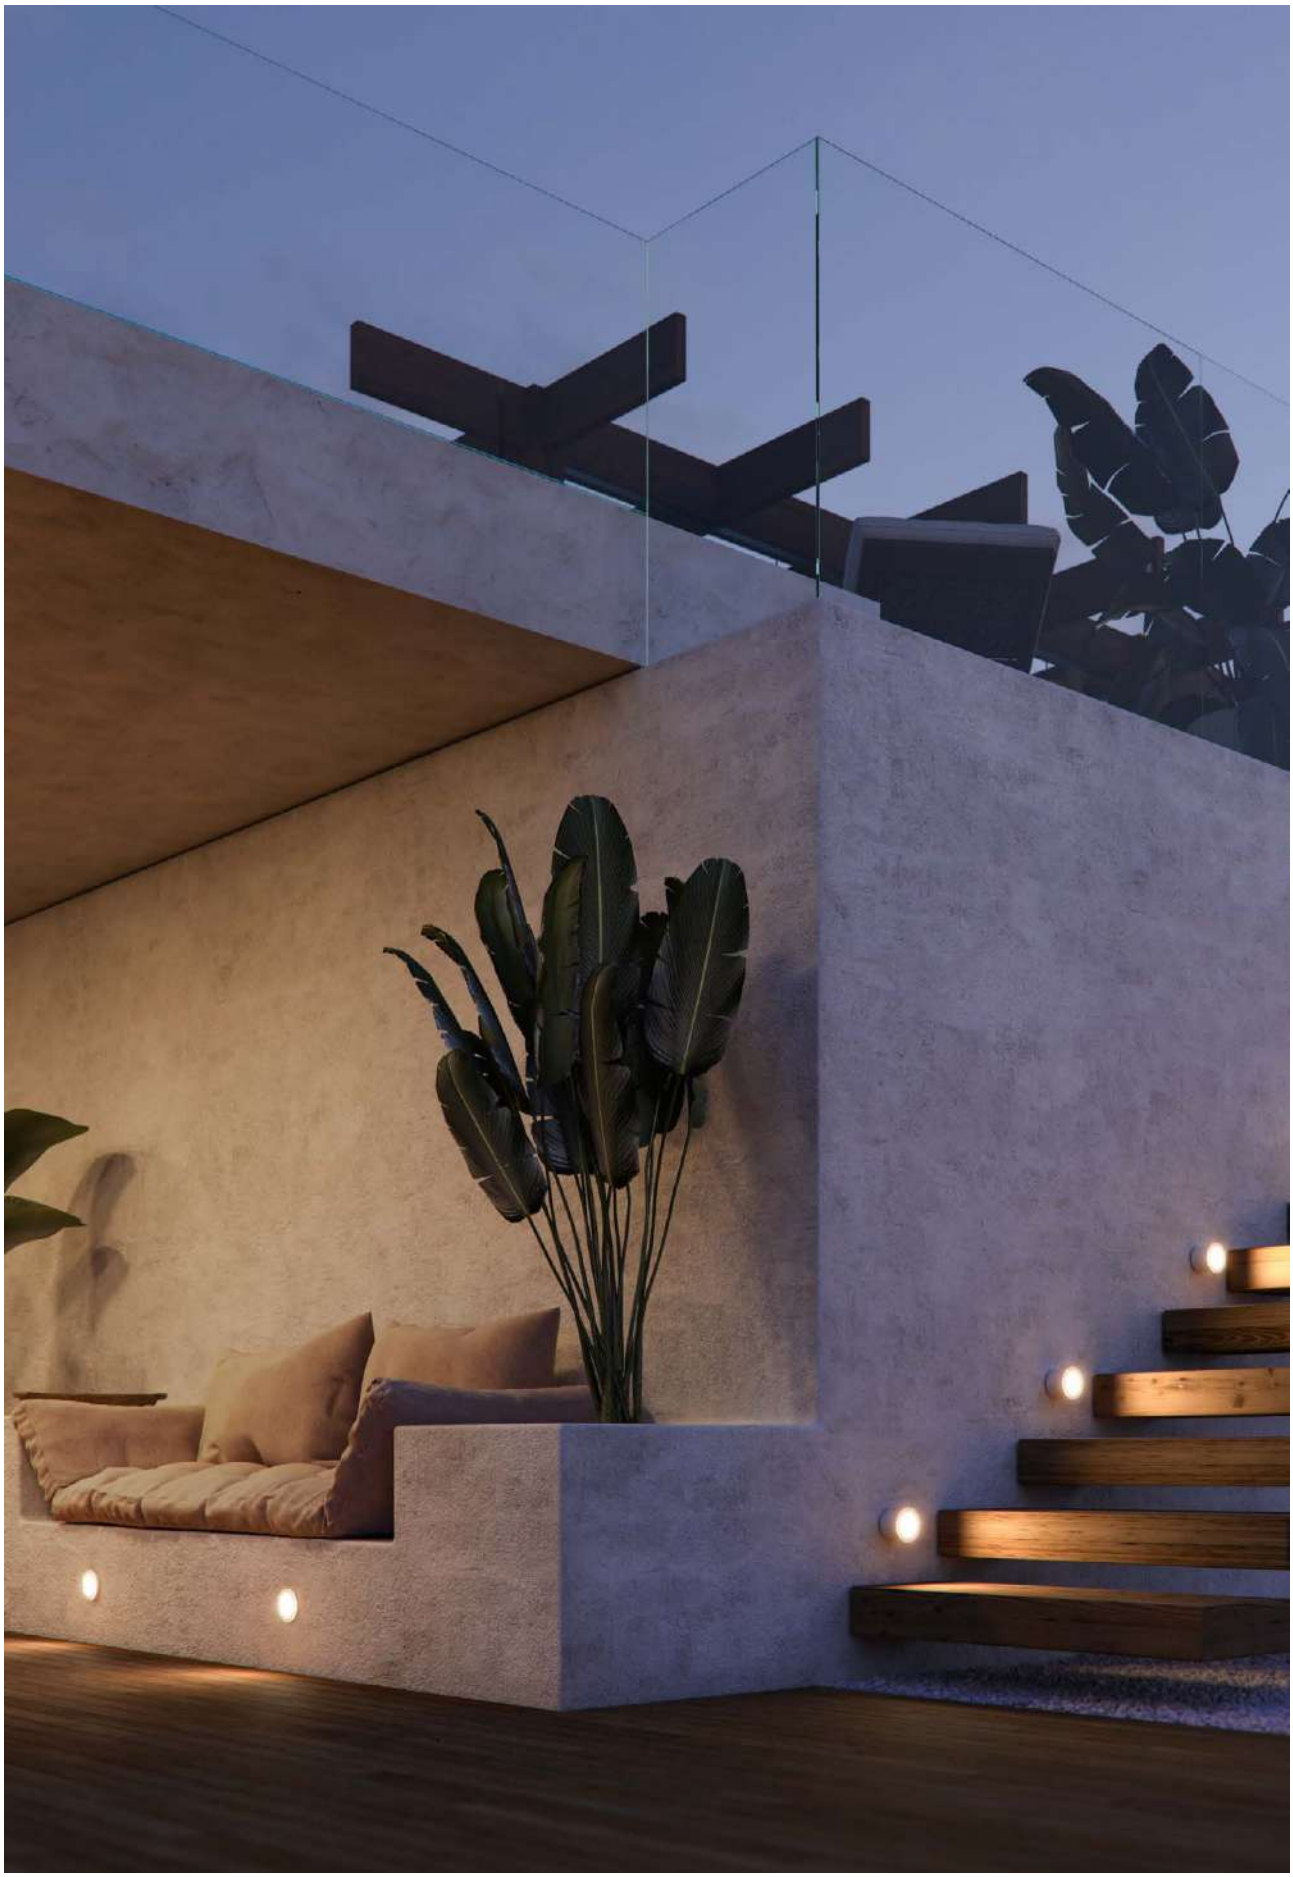

Artis r wall






Recessed box included
67mm x Ø74mm



Surface box included
54mm x Ø80mm

Artis sq wall





Recessed box included
107mm x 73mm x 53mm



Surface box included
103mm x 79mm x 57 mm

Technical Information

	Artis r wall	Artis sq wall
Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	○ 5205	□ 5028

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 66 | 175/265 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +50°C -20°C | CCT SWITCH | 1/20

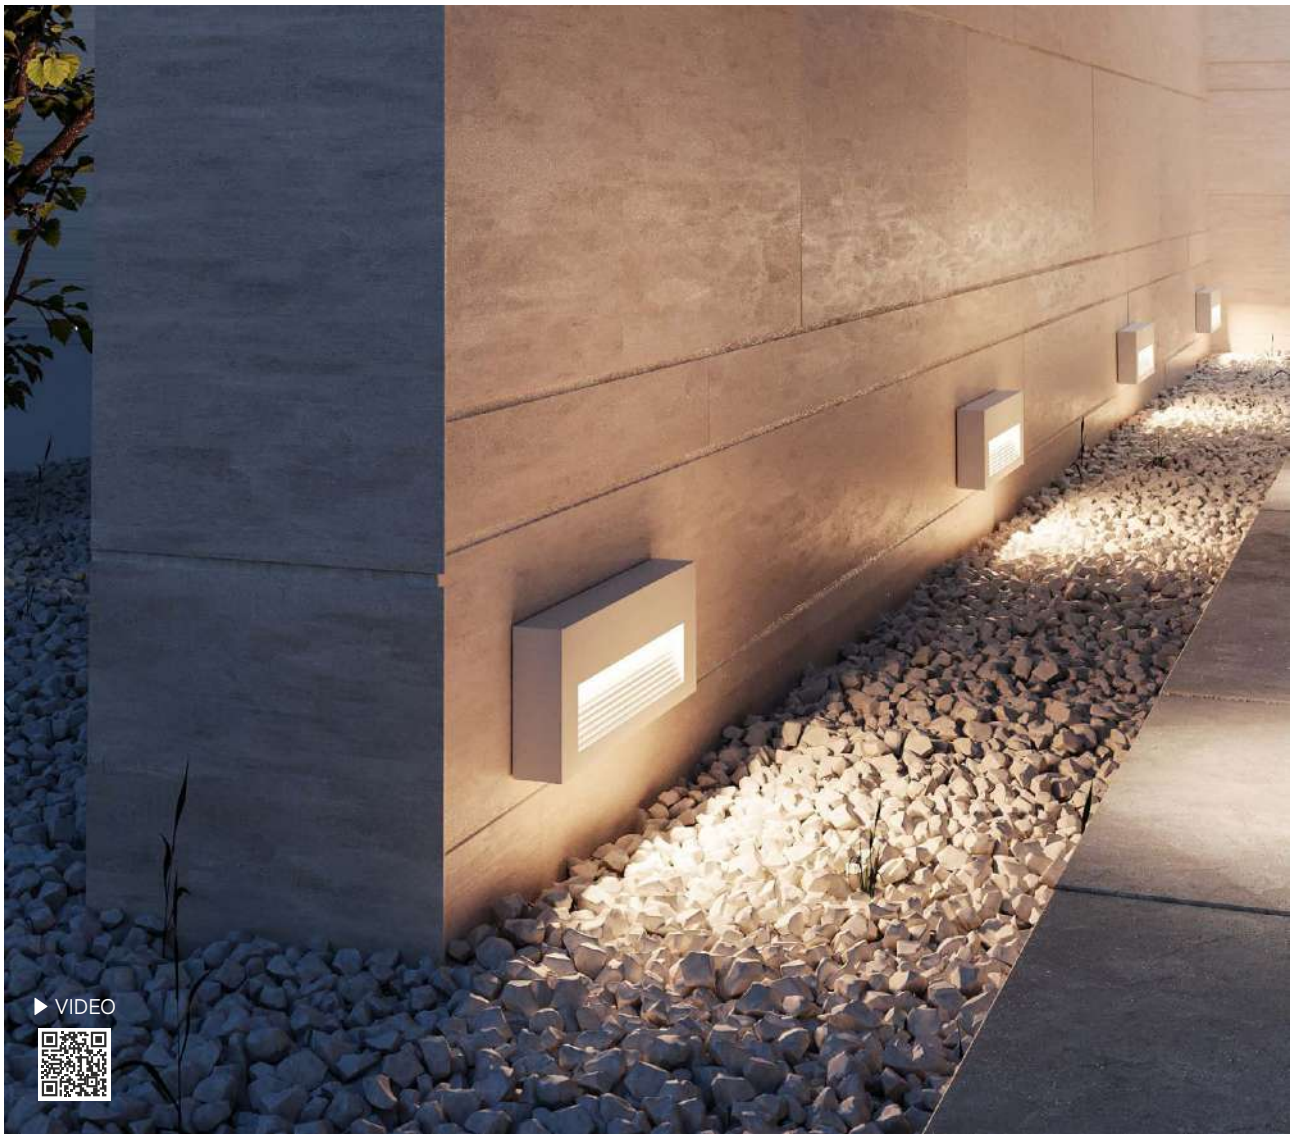




▶ VIDEO

Tween recessed










Recessed box included

Tween surface





Technical Information

	Tween recessed	Tween surface
Power	5W	5W
Installation	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Tween recessed	Tween surface
	☐ 5199	☐ 5196
	■ 5200	■ 5197
	■ 5201	■ 5198

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/50



Pure wall





*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	155 lm / 80 lm / 40 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 5159
	■ 5160

CE RoHS


*Charger by USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | USB-C 5V 2A | CRI ≥90 | 30° | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/20




Sweet wall





Sweet usb-a





*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

	Sweet wall	Sweet usb-a
Power	4W	4W
Installation	Surface	Surface
Color Temperature	2.700K	2.700K
Lumens	150 lm / 90 lm / 40 lm	150 lm / 90 lm / 40 lm
Material	Aluminium	Aluminium
Finishes	White / Black	Black
Code	☐ 5155 ■ 5156	■ 4175
	USB-C 5V 2A | CRI ≥90	USB-A 5V 2A | CRI ≥80

CE RoHS


*Charger by induction and USB.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,4 | 20° | 5W | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/10



Beam wall







*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	5W
Installation	Surface
Color Temperature	2.700K
Lumens	380 lm / 190 lm / 95 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 5157
	■ 5158

CE RoHS


*Charger by USB-C.

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 40° | 50/60 Hz | USB-C 5V 2A | 3 INTENSITIES | +40°C -20°C | 1/12




Mini Mac wall






Mac wall





Mac wall XL





*Included 33mm base, optional 53mm base.

Technical Information

	Mini Mac wall	Mac wall	Mac wall XL
Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten

Code	Mini Mac wall	Mac wall	Mac wall XL
	○ 4995	○ 4998	○ 5001
	● 4996	● 4999	● 5002
	4997	5000	5003
	5218	5219	5220
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

53mm



Mini mac base

○ 5226 ○ 5228
● 5227 ● 5229

53mm



Mac base


○ 5230 ○ 5232
● 5231 ● 5233

53mm



Mac XL base

○ 5234 ○ 5236
● 5235 ● 5237




CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/10



Mac wall base





Technical Information

Power	12W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten

Code	
	○ 5264
	● 5265
	● 5266

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New




T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/6

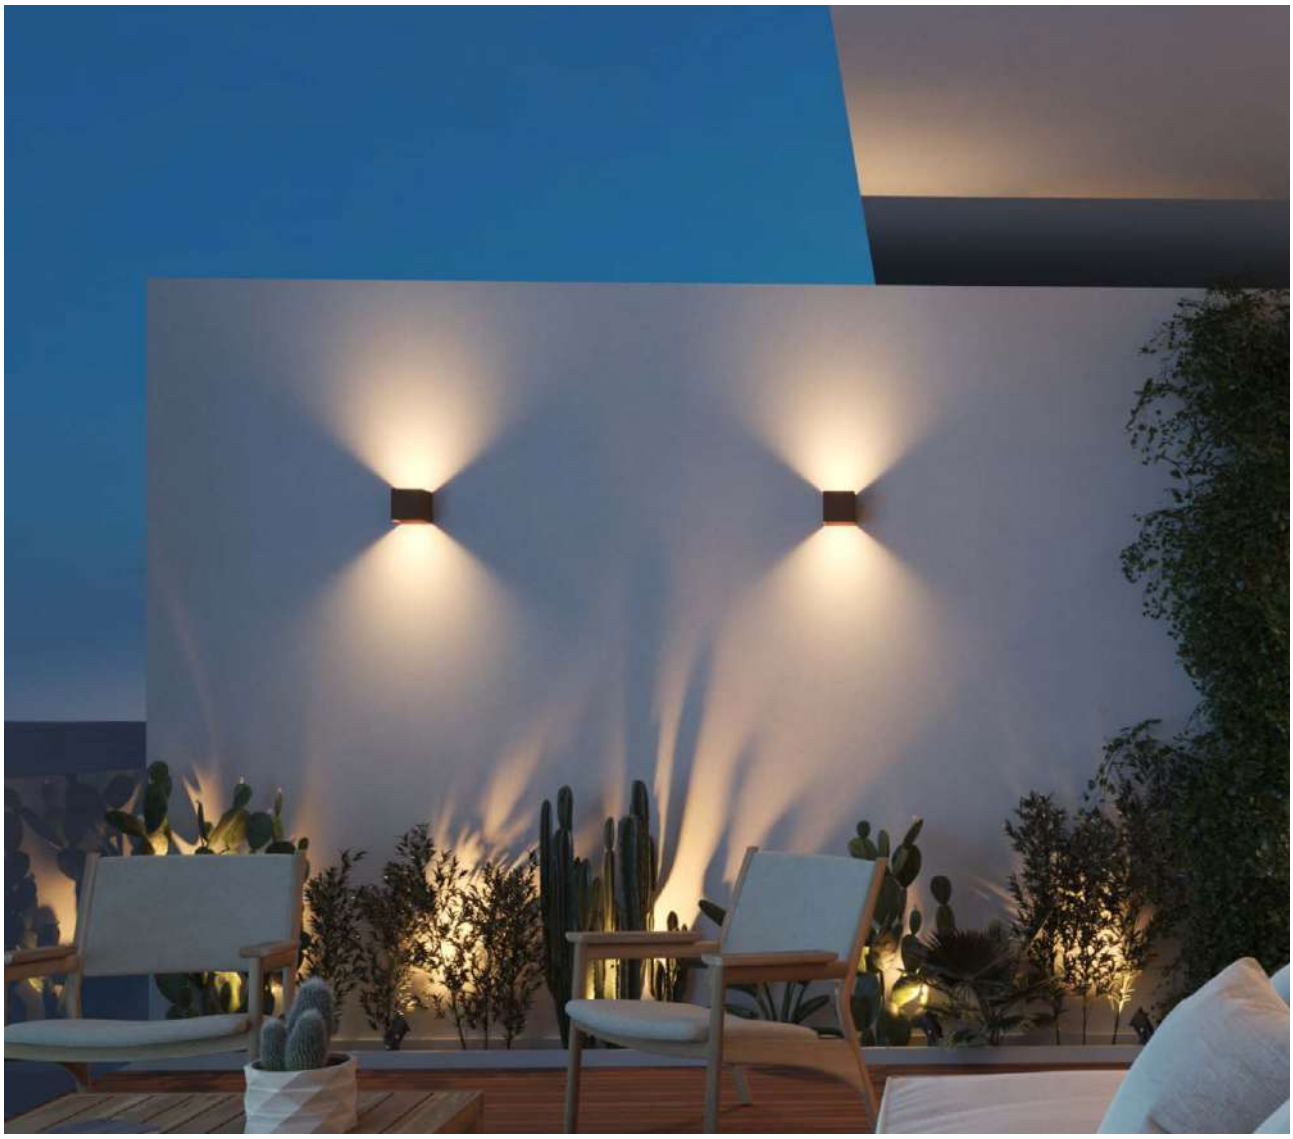



▶ VIDEO

New

Lek sensor



Battery powered

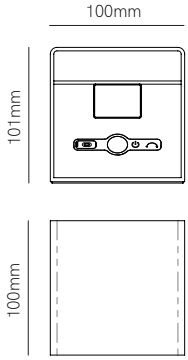

Technical Information

Power	6W
Installation	Surface
Color Temperature	3.000K
Lumens	358 lm
Material	Aluminium
Finishes	White / Black / Corten

Code	
	5666
	5667
	5668

CE RoHS


3 YEARS WARRANTY | 1 YEARS WARRANTY | 30.000 HOURS | 5 HOURS | 4-24 HOURS | USB-C 5V | 4.400 mAh | IP 54 | CRI ≥80 | 100° | IK05 | DIMMABLE | +45°C +10°C | PIR SENSOR | 1/9






Lek r wall





Lek sq wall





Technical Information

	Lek r wall	Lek sq wall
Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code					
	○	2.700K	4906	□ 2.700K	4303
	○	3.000K	4907	□ 3.000K	3983
	○	4.000K	4908	□ 4.000K	3984
	●	2.700K	4909	■ 2.700K	4304
	●	3.000K	4910	■ 3.000K	3985
	●	4.000K	4911	■ 4.000K	3986
	●	2.700K	4912	■ 2.700K	4312
	●	3.000K	4913	■ 3.000K	3987
	●	4.000K	4914	■ 4.000K	3988
ⓘ		Custom RAL		ⓘ Custom RAL	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 54 | 220/240 VAC | PF >0,9 | CRI ≥80 | 0°-120° | 50/60 Hz | IK04 | +40°C -10°C | AKZO NOBEL | 1/12




Mini Icon wall





Icon wall





Technical Information

	Mini Icon wall	Icon wall
Power	7W	12W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.320 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code		
	☐ 4383	☐ 4386
	■ 4384	■ 4387
	■ 4385	■ 4388
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI ≥90 | 120° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/12




Clos wall





Clos wall dual





Technical Information

	Clos wall	Clos wall dual
Power	8W	16W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Clos wall	Clos wall dual
	○ 4876	○ 4879
	● 4877	● 4880
	● 4878	● 4881
	120°	120°

Accessories (page 641)



Clos base mini
- ○ 4882
- ● 4883
- ● 4884



Clos dual base mini
- ○ 4888
- ● 4889
- ● 4890



Clos base
- ○ 4885
- ● 4886
- ● 4887



Clos dual base
- ○ 4891
- ● 4892
- ● 4893


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | IK08 | +40°C -25°C | CCT SWITCH | 1/20




Neo





Neo XL





Technical Information

	Neo	Neo XL
Power	9W	18W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	1.640 lm / 1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code				Code		
	☐	3.000K	3747	☐	3.000K	3890
	☐	4.000K	3748	☐	4.000K	3891
	■	3.000K	3749	■	3.000K	3892
	■	4.000K	3750	■	4.000K	3893

IP 54 | 220/240 VAC | PF >0,7 | 1/12

IP 65 | 100/240 VAC | PF >0,9 | 1/4

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C




Neo sensor





Neo XL sensor





Technical Information

	Neo sensor	Neo XL sensor
Power	9W	18W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	1.640 lm / 1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	☐	3.000K	3585	☐	3.000K	3886
	☐	4.000K	3583	☐	4.000K	3887
	■	3.000K	3584	■	3.000K	3888
	■	4.000K	3582	■	4.000K	3889
	220/240 VAC | PF >0,7 | 1/12			100/240 VAC | PF >0,9 | 1/4		

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | → | IP 54 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min





Oma

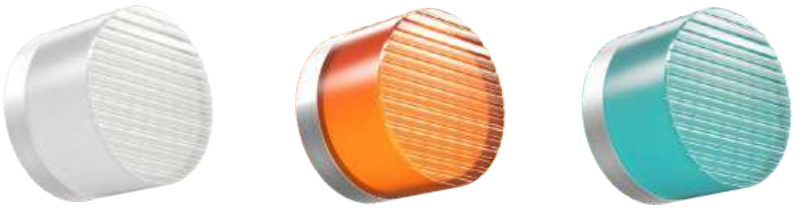



Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.000K / 2.800K / 4.000K
Lumens	○ 600lm / ● 440lm / ● 400lm
Material	Aluminium and methacrylate
Finishes	White / Amber / Turquoise

Code	
○	5381
●	5382
●	5383

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥70-80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/20



Tron





Technical Information

Power	5W / 8W / 16W / 24W
Installation	Surface
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	300 lm - 2.400 lm
Material	Aluminium
Finishes	White / Black

Code		Diffuser		Size (X)			CCT (Lm/W) - Power/m		Driver		Colour	
Code	9	Opal	7	Nano tron	140mm	New 0	2.700K (60 lm/W) - 29W/m	2	Triac	4	White (9003)	1
				Mini tron	290mm	1	3.000K (65 lm/W) - 29W/m	3			Black (9005)	2
				Tron	590mm	2	4.000K (70 lm/W) - 29W/m	4			Custom RAL	C
				Tron XL	870mm	3						

Code: 9 7 4

CE RoHS EMC


Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 0,87m Max | TRIAC DIMM





▶ VIDEO

Sphere wall





Sphere alp wall



Sphere wall

Sphere alp wall

*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

	Sphere wall	Sphere alp wall
Power	9W	20W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	465 lm	680 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black

Code						
	○	2.700K	5333	○	2.700K	5339
	○	3.000K	5334	○	3.000K	5340
	●	2.700K	5336	●	2.700K	5342
	●	3.000K	5337	●	3.000K	5343
	IP 54 | PF >0,6 | 360° | 1/12			IP 20 | PF >0,9 | 360° | 36° | 1/6		

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | 220/240 VAC | UGR <19 | CRI ≥90 | 50/60 Hz | +40°C -20°C




Sphere alp wall




▶ VIDEO


Mini Comet





Comet





Technical Information

	Mini Comet	Comet
Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code		
	☐ 5075	☐ 5073
	■ 5076	■ 5074
	■ 5113	■ 5112
	1/16	1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40°x90° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM






Zibor





Selen





Technical Information

	Zibor	Selen
Power	12W	12W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm	1.200 lm / 1.250 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black

Code			Zibor		Selen
	○	3.000K	4670	4668	○
	○	4.000K	4669	4667	○
	●	3.000K	4830	4828	●
	●	4.000K	4829	4827	●
	ⓘ	Custom RAL		Custom RAL	ⓘ

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 120° | | 50/60 Hz | IK02 | +40°C -20°C | 1/10






Blis r






Blis sq






Blis rect







Technical Information

	Blis r	Blis sq	Blis rect
Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	○ 4957	□ 4960	□ 4982
	● 4958	■ 4961	■ 4983
	● 4959	■ 4962	■ 4984
	PF >0,6 | 250°	PF >0,6 | 180°	PF >0,9 | 180°

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC


*IP65 connection box included.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | CRI ≥80 | 50/60 Hz | IK04 | +40°C -20°C | CCT SWITCH | 1/6

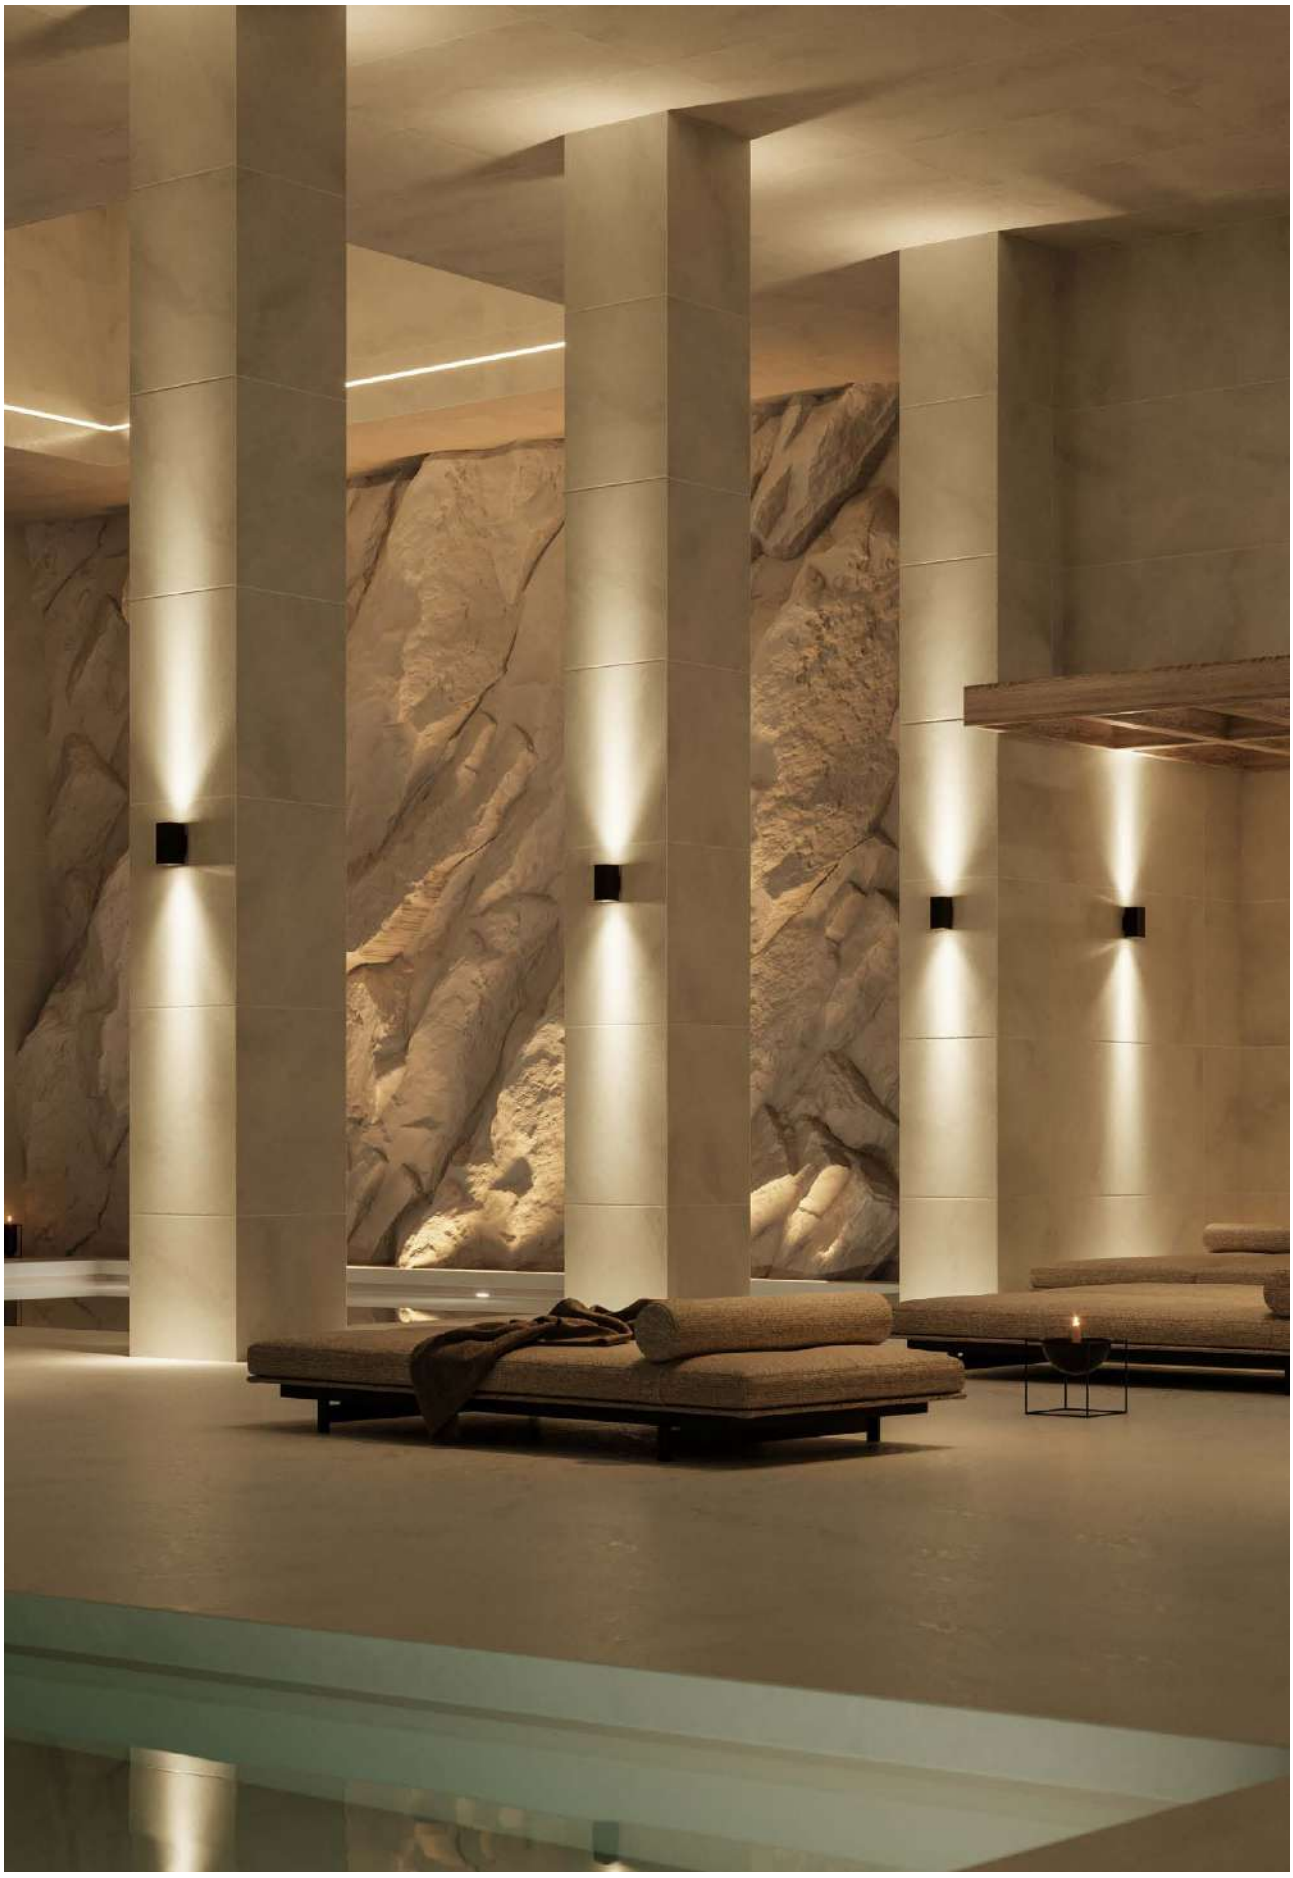


Sunset r





Sunset sq





Technical Information

	Sunset r	Sunset sq
Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.800 lm	1.800 lm
Material	Policarbonate	Policarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Sunset r	Sunset sq
	○ 4989	□ 4992
	● 4990	■ 4993
	● 4991	■ 4994
	ⓘ Custom RAL	ⓘ Custom RAL

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10


ITALIAN DREAM


Sunset XL





Sunset XL dual





Technical Information

	Sunset XL	Sunset XL dual
Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code		
	○ 5419	○ 5422
	● 5420	● 5423
	● 5421	● 5424
	ⓘ Custom RAL	ⓘ Custom RAL
	1/20	1/15

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥90 | 24° | 50/60 Hz | IK05 | +50°C -25°C | CCT SWITCH



New


Mini Pla






Pla





Pla XL





Technical Information

	Mini Pla	Pla	Pla XL
Power	20W	35W	35W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	900 lm	1.400 lm	1.400 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	☐ 5684	☐ 5687	☐ 5690
	■ 5685	■ 5688	■ 5691
	■ 5686	■ 5689	■ 5692
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	1/10	1/10	1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 110° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20

WALL




One GU10 wall





One GU10 wall dual





*GU10 Bulbholder included.

Technical Information

	One GU10 wall	One GU10 wall dual
Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	5006	5009
	5007	5010
	5008	5011
ⓘ	Custom RAL	ⓘ Custom RAL

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20




Zio GU10 wall





Zio GU10 wall dual





*GU10 Bulbholder included.

Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	5012	5015
	5013	5016
	5014	5017
	Custom RAL	Custom RAL


CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20




Portable & table

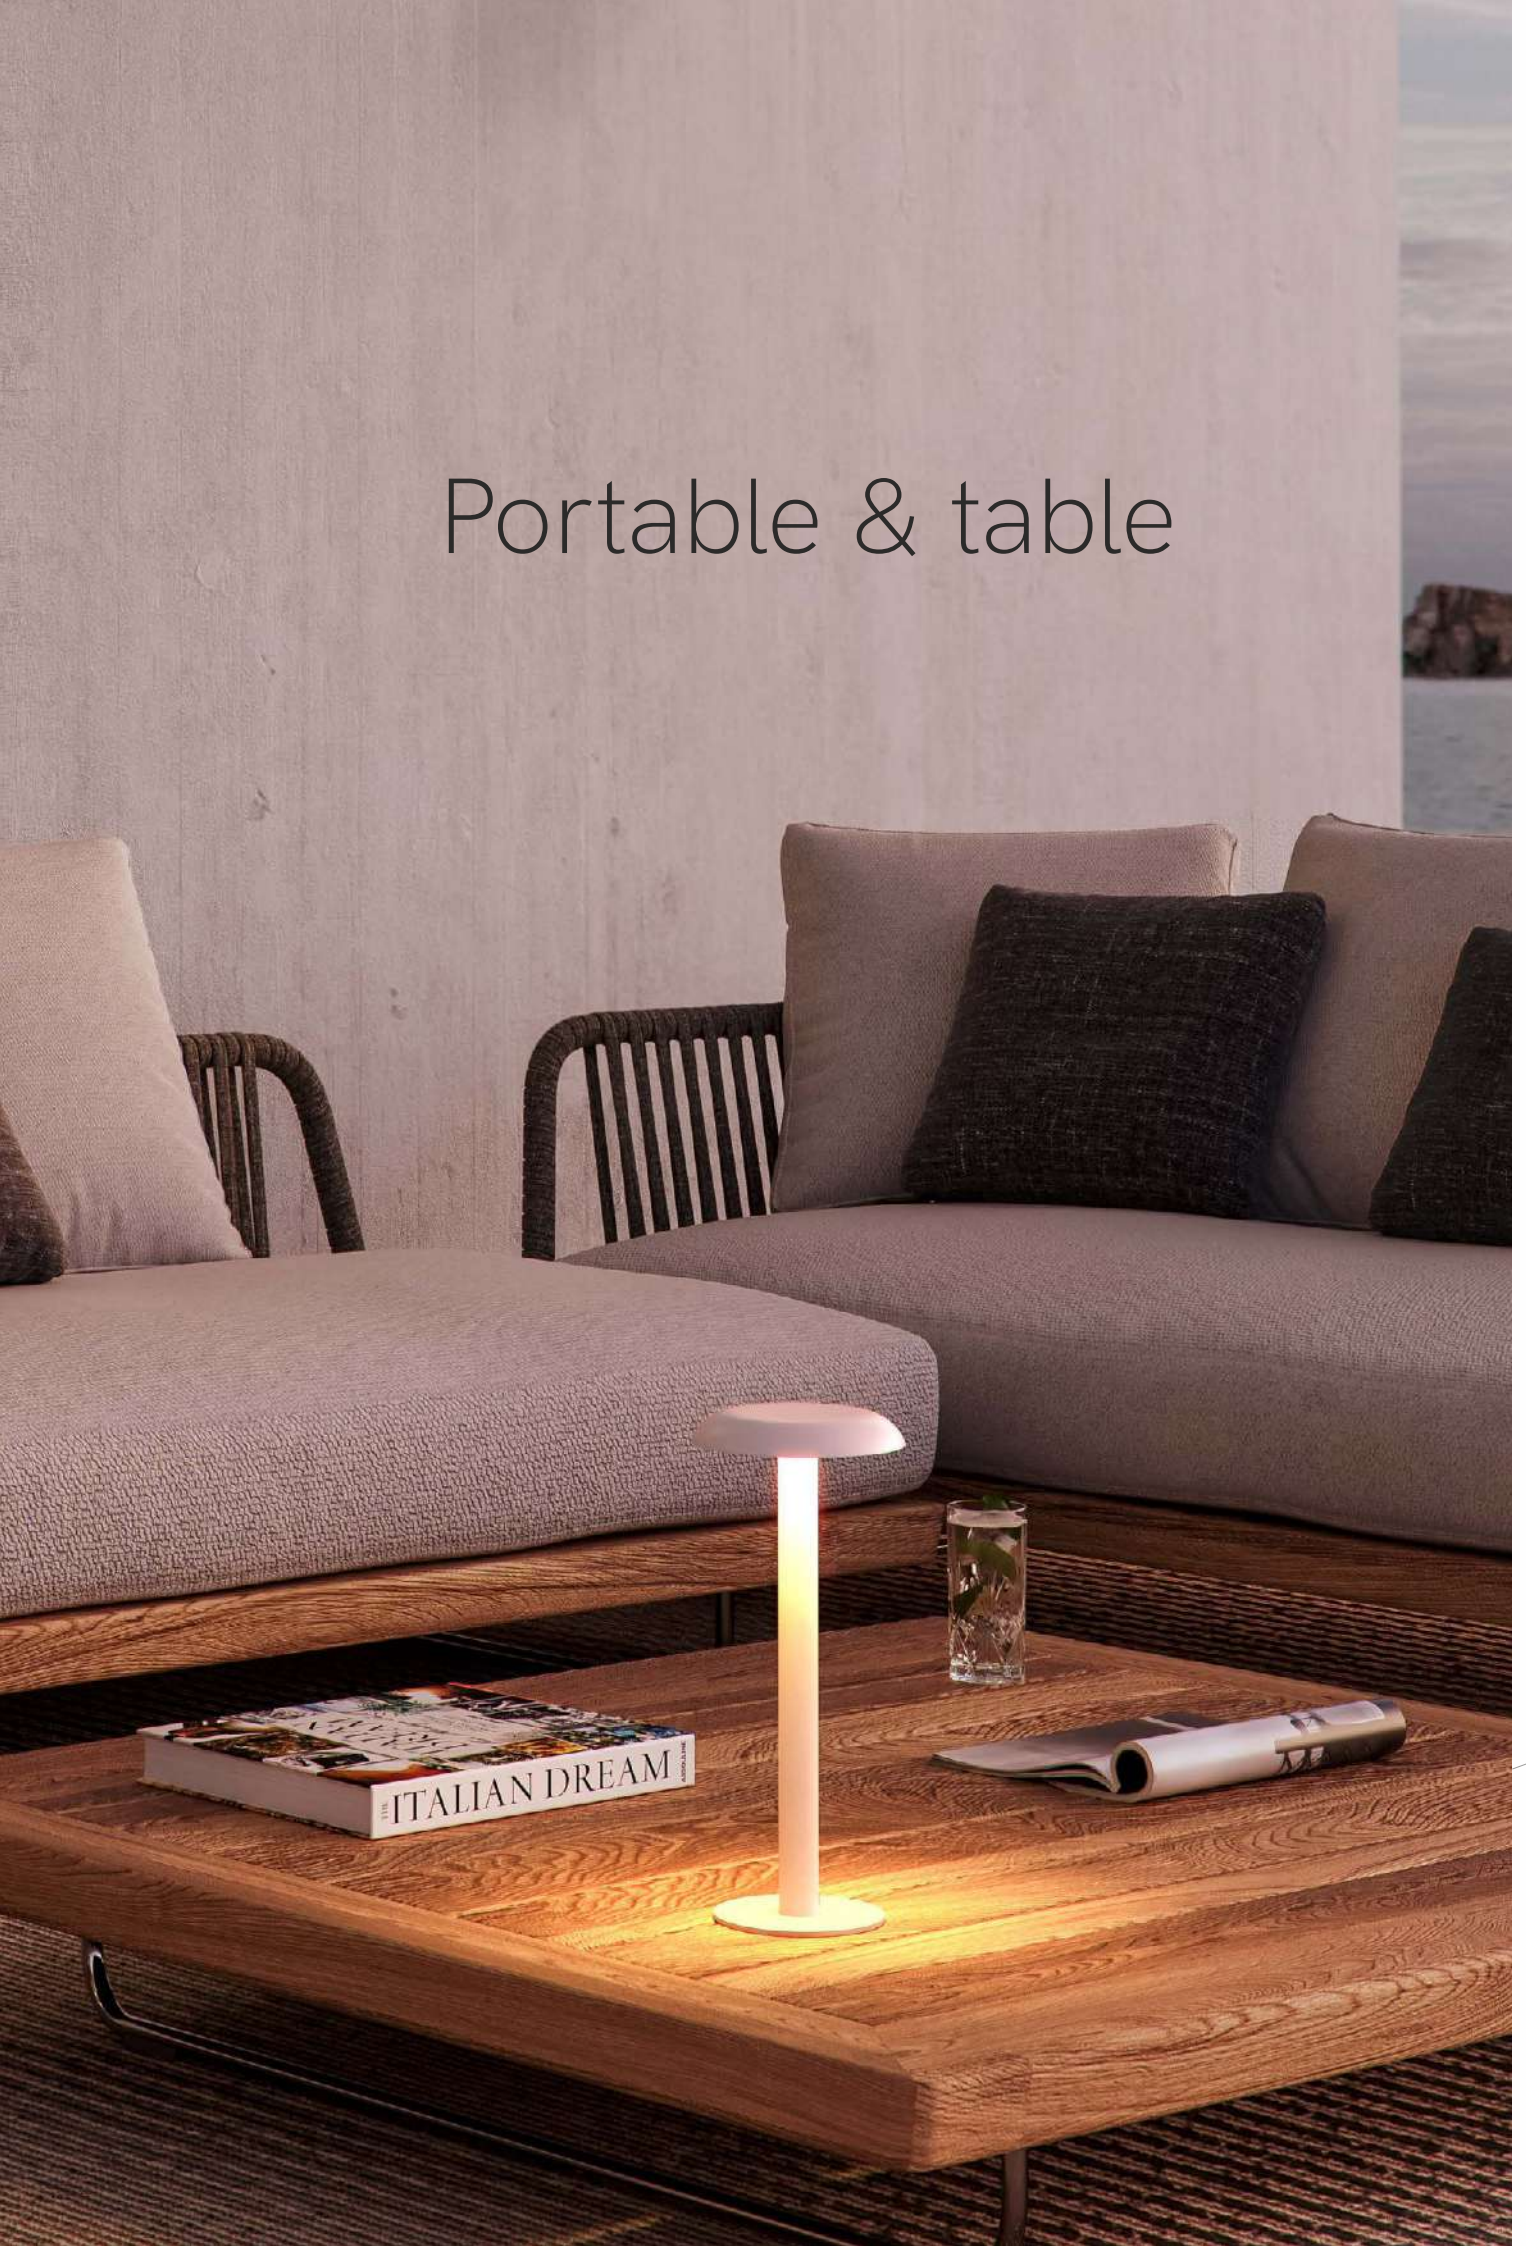

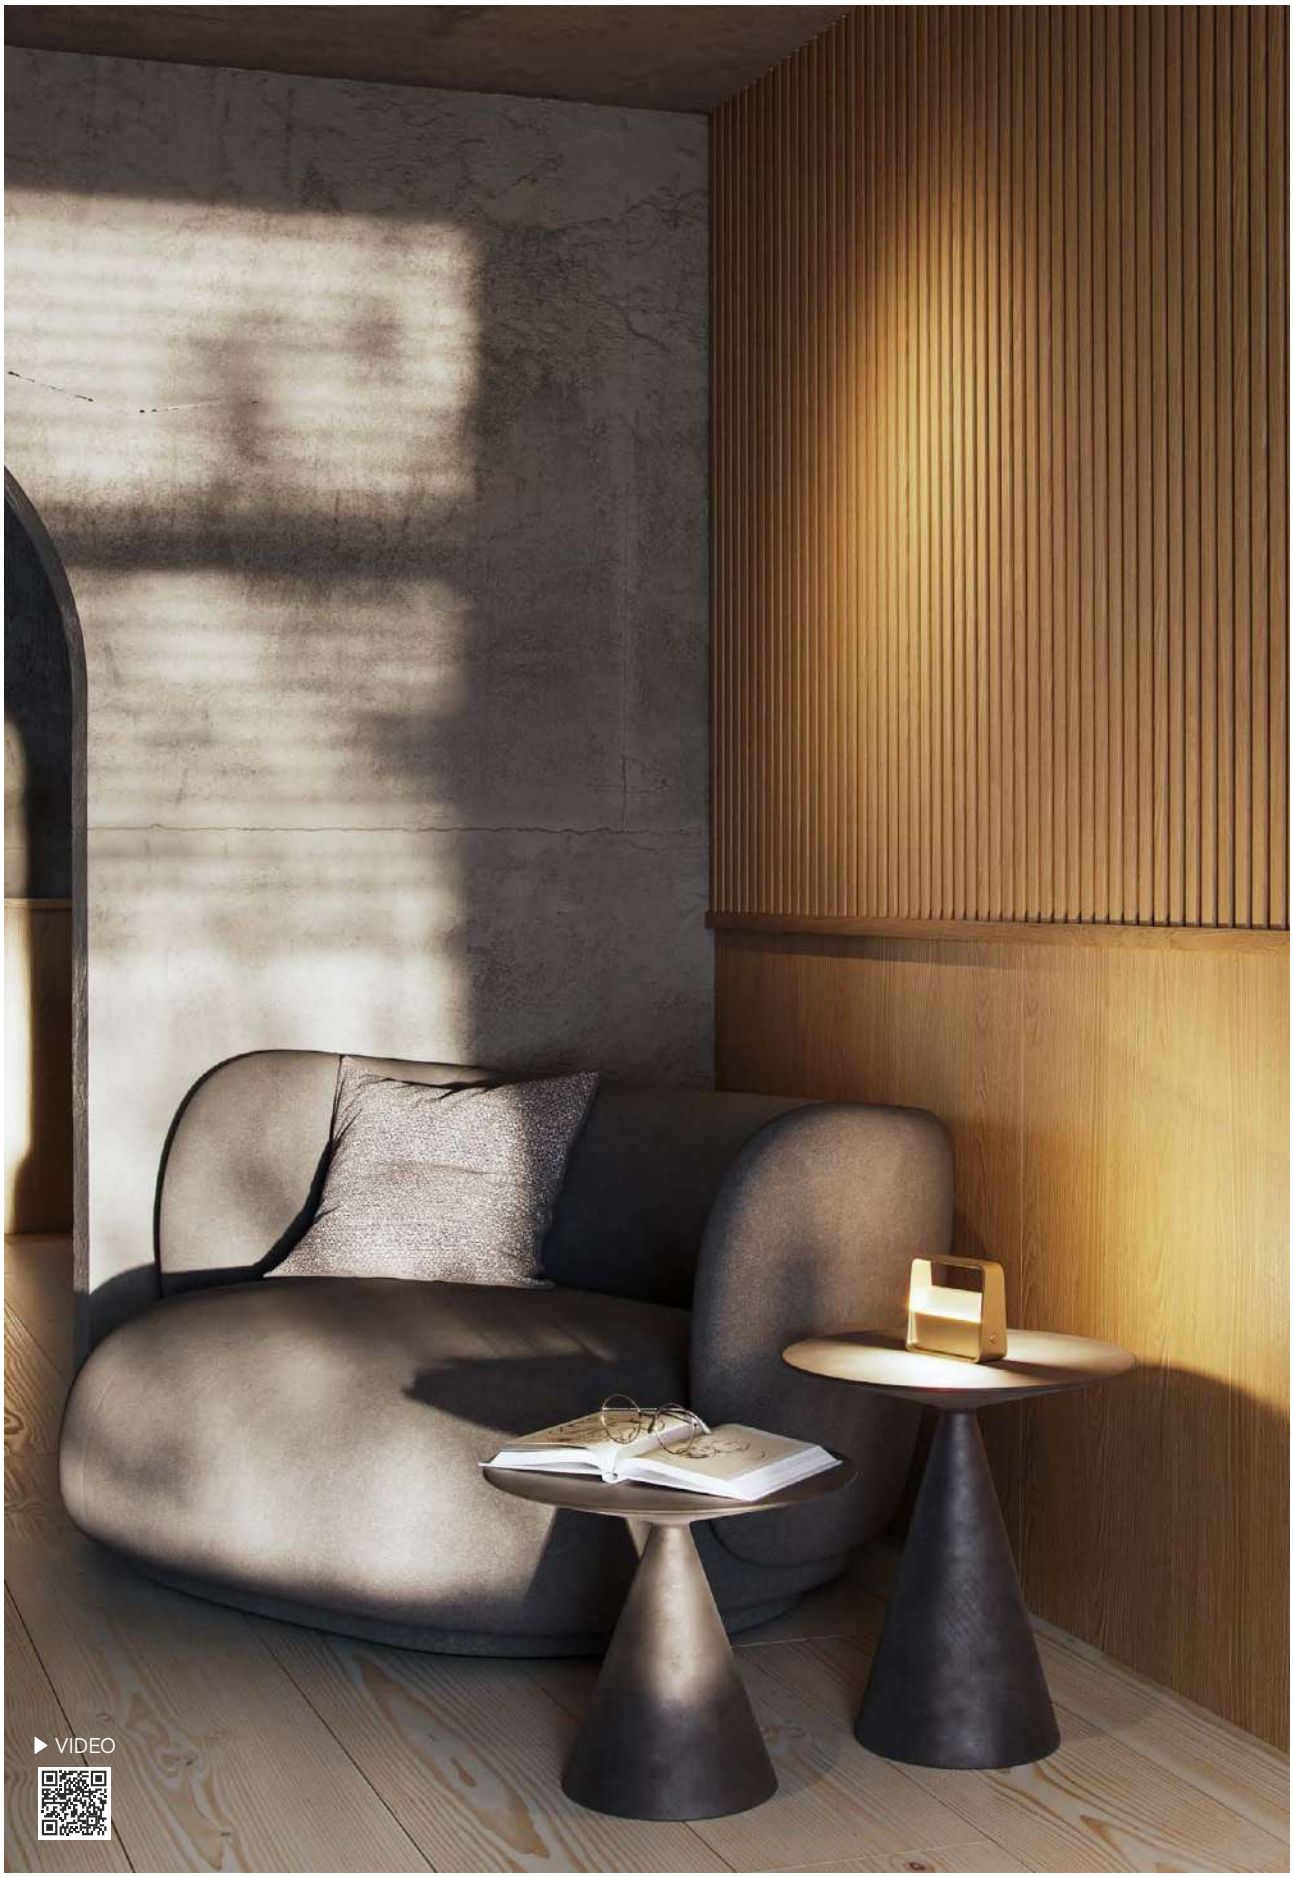
▶ VIDEO

Bag





Technical Information

Power	2W
Installation	Portable
Color Temperature	3.000K
Lumens	50 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne

Code	
	5329
	5330
	5331
	5332


CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 2,5 HOURS | 3,5 HOURS | USB-C 5V | 1.800 mAh | IP 20 | CRI ≥90 | 180° | DIMMABLE | IK06 | +40°C -20°C | 1/20


▶ VIDEO

Bimba





Technical Information

Power	2W
Installation	Portable
Color Temperature	Switch 2.000K / 3.100K / 5.000K
Lumens	118 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne

Code		
	5325	
	5326	New
	5327	
	5328	


CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 9.000 HOURS | 3,5 HOURS | 5 HOURS | USB-C 5V | 3.000 mAh | IP 65 | CRI ≥80 | 110° | DIMMABLE | IK04 | +40°C -20°C | CCT SWITCH | 1/8



Converse





Technical Information

Power	2,5W
Installation	Portable
Color Temperature	2.700K / 5.000K
Lumens	225 lm
Finishes	White

Code	○ 3916-N

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 50.000 HOURS | 5-6 HOURS | 4-150 HOURS | MICRO USB 5V | 2.200 mAh | IP 20 | CRI ≥82 | 360° | DIMMABLE | +40°C -20°C | 1/15



▶ VIDEO





Madi



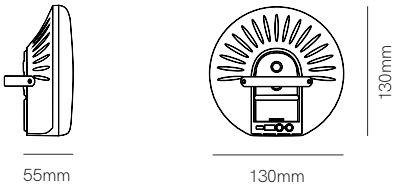


Technical Information

Power	4W
Installation	Portable
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm
Material	Polycarbonate and ABS
Finishes	White

Code	○ 5154


CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | POWER BANK | 3-4 HOURS | 100% 6-7H 50% 12-15H SOS 16-18H | USB-C 5V 2A | 5.200 mAh | IP 54 | CRI ≥80 | 200° | DIMMABLE | IK08 | +40°C -10°C | CCT SWITCH | 1/20

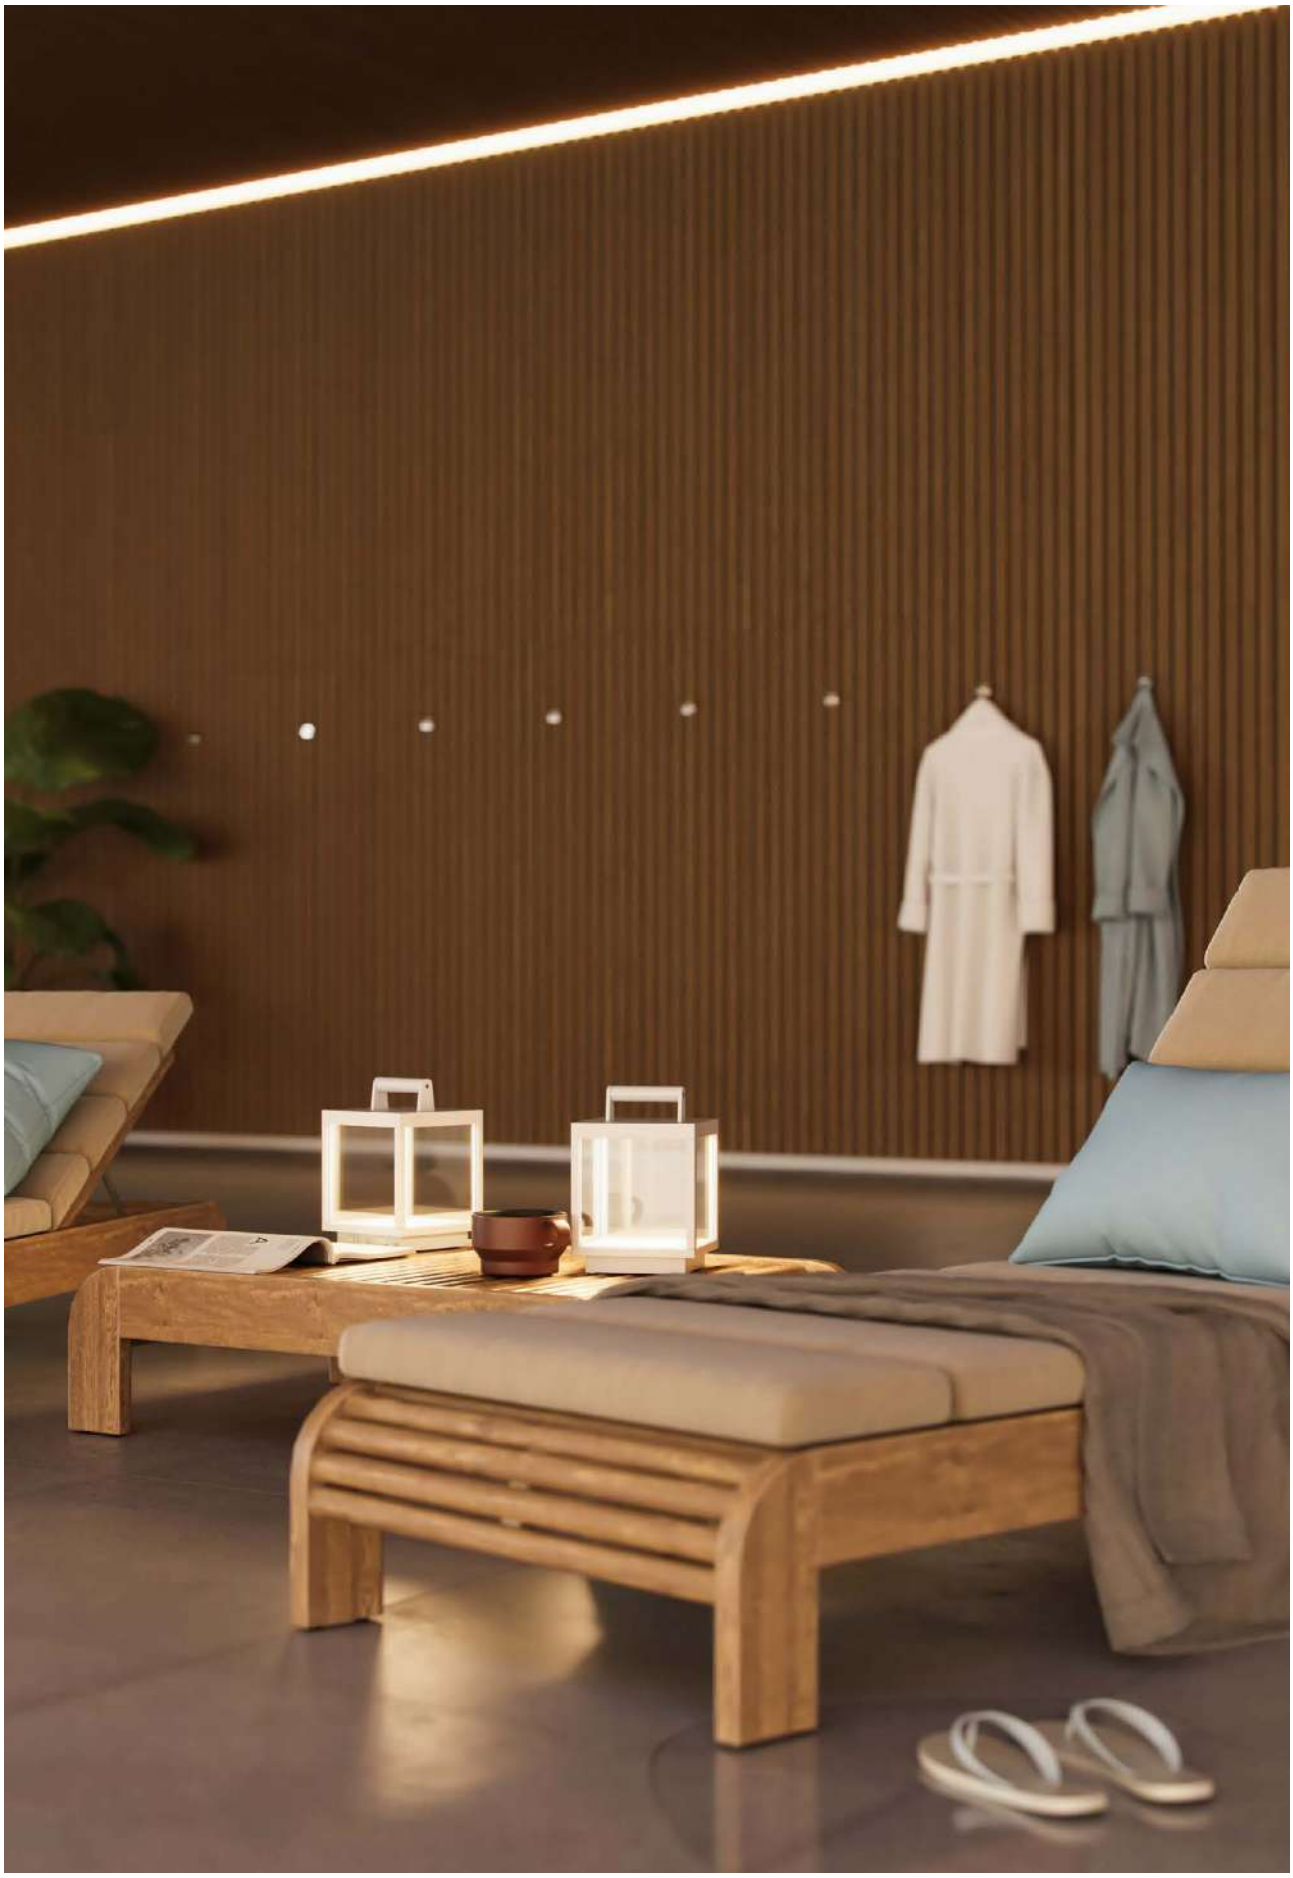

Visor





Technical Information

Power	5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm / 230 lm / 46 lm
Material	Aluminium
Finishes	White / Corten

Code	
	3929
	3931

CE RoHS


*Charger by USB. Charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 6,5 HOURS | 5/11/25 HOURS 7.800 mAh | 3,7V USB | IP 65 | CRI ≥80 | 120° | IK05 | 3 INTENSITIES | +45°C -20°C | 1/4



Stem





Technical Information


Power	5W
Installation	Table
Color Temperature	2.700K
Lumens	175 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 4979
	● 4981


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,45 | CRI ≥90 | 30° | 5W | 50/60 Hz | IK06 | +50°C -20°C | 1/20



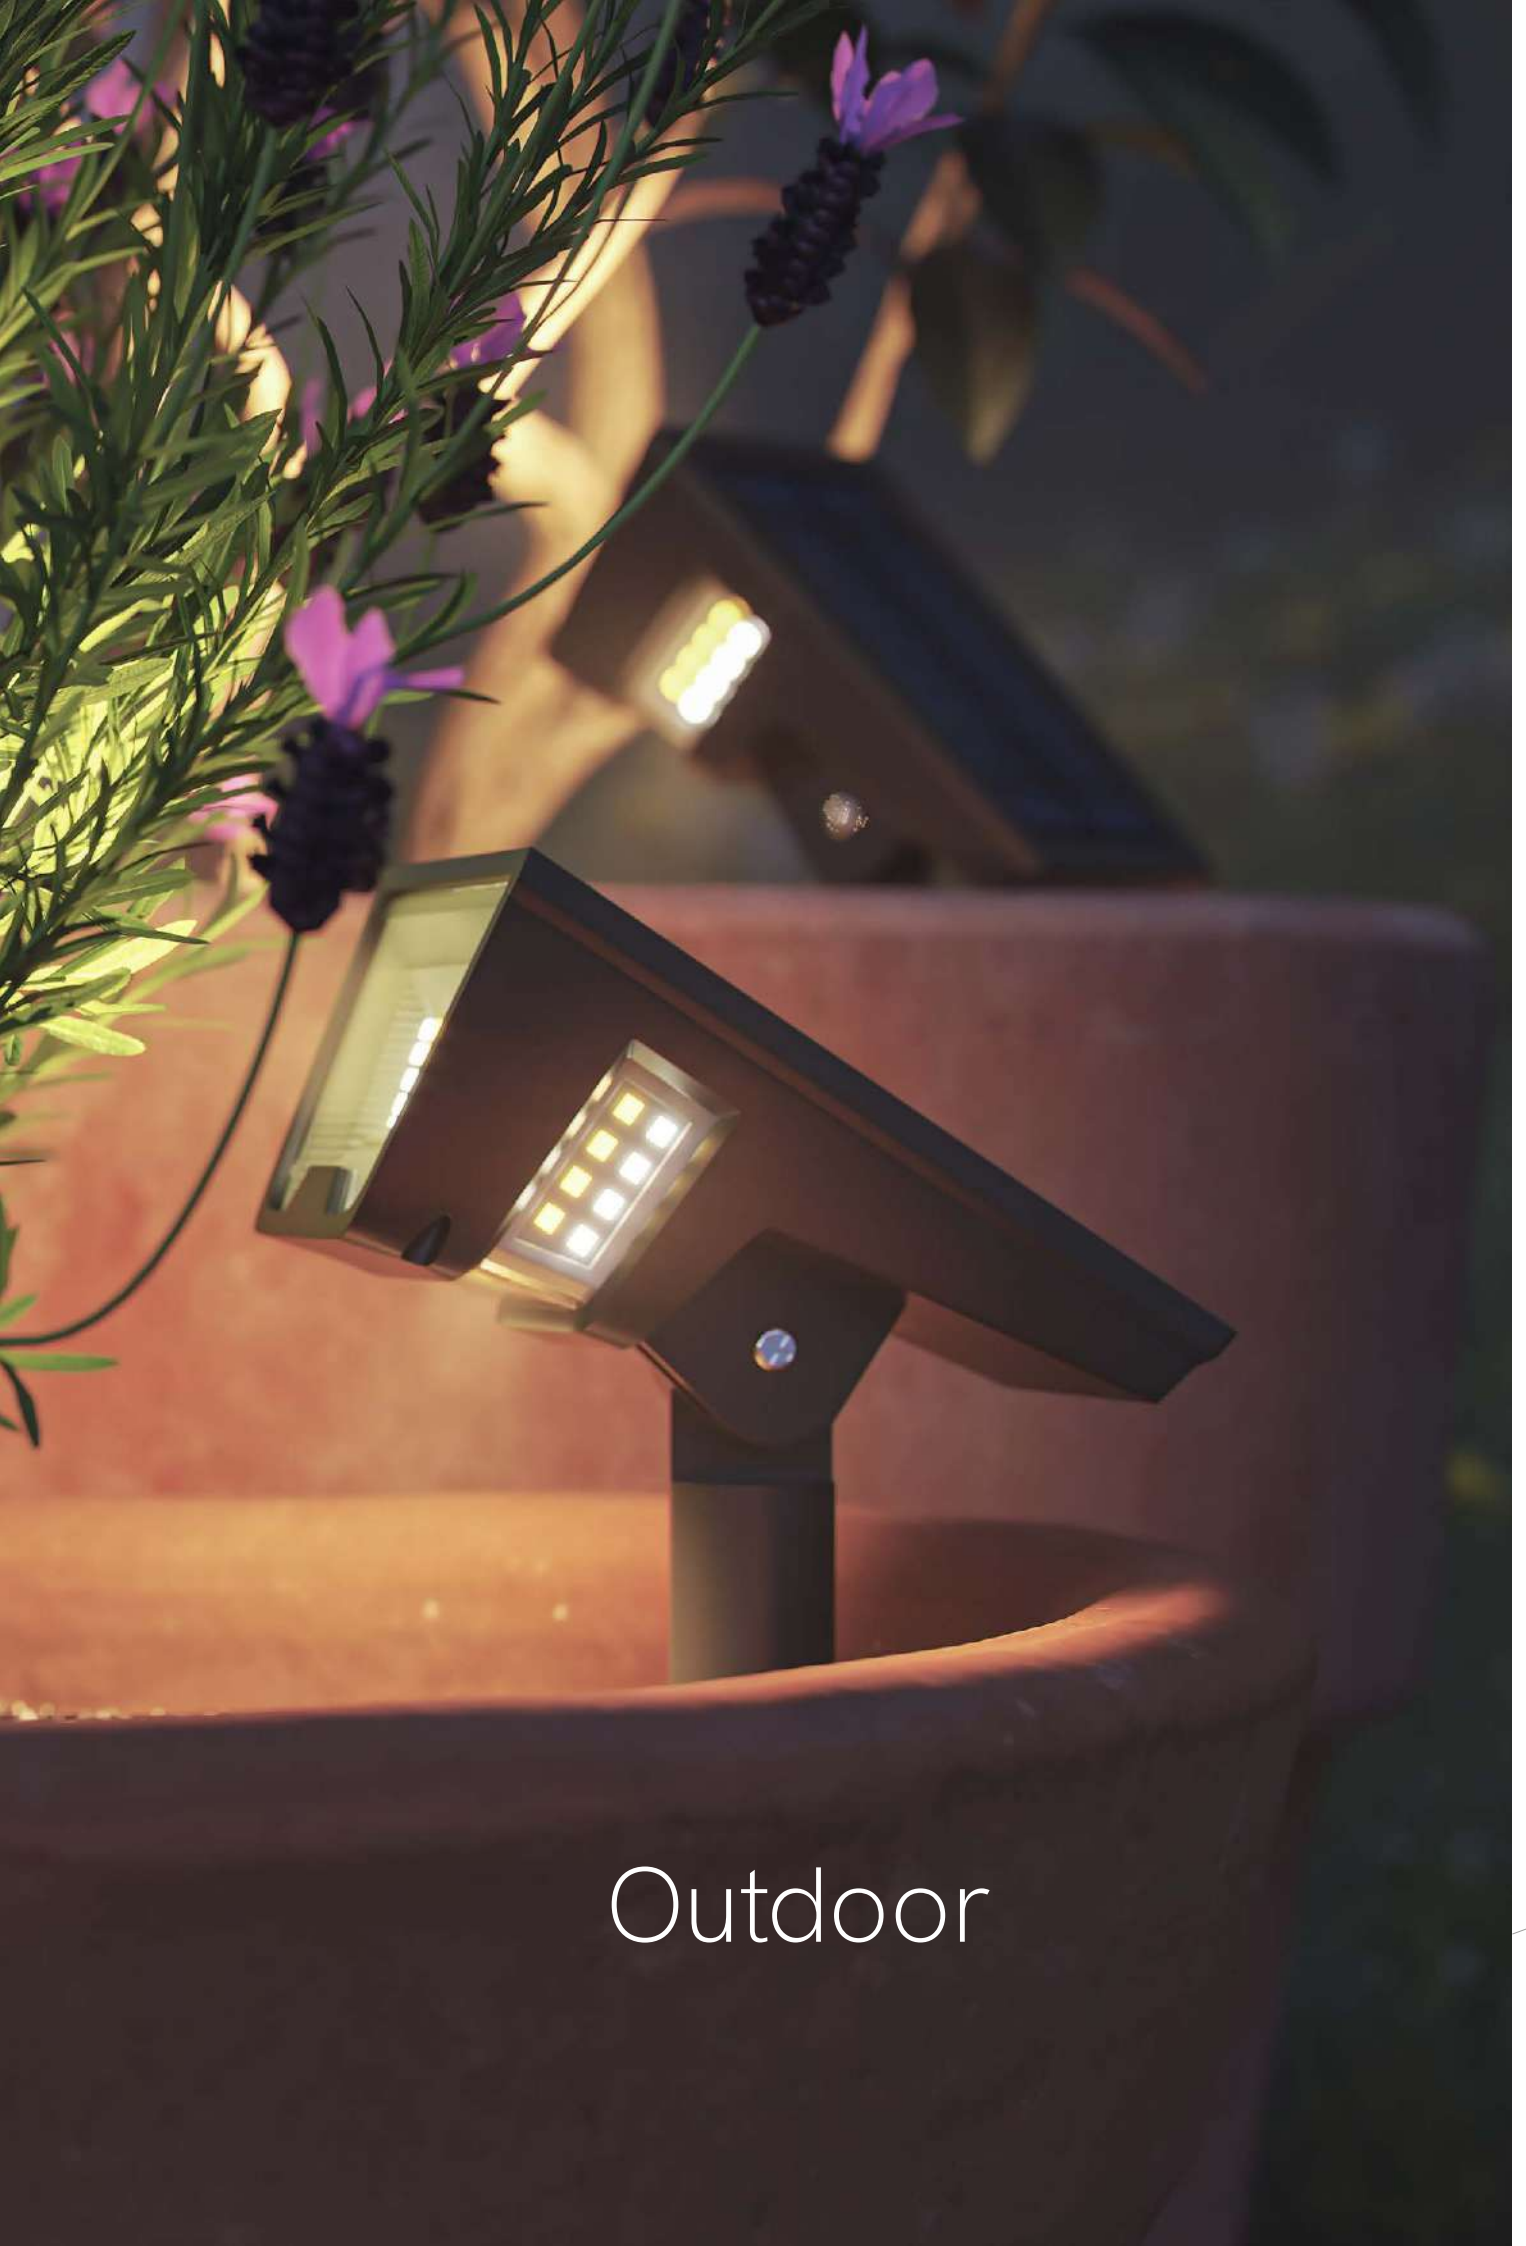


Outdoor

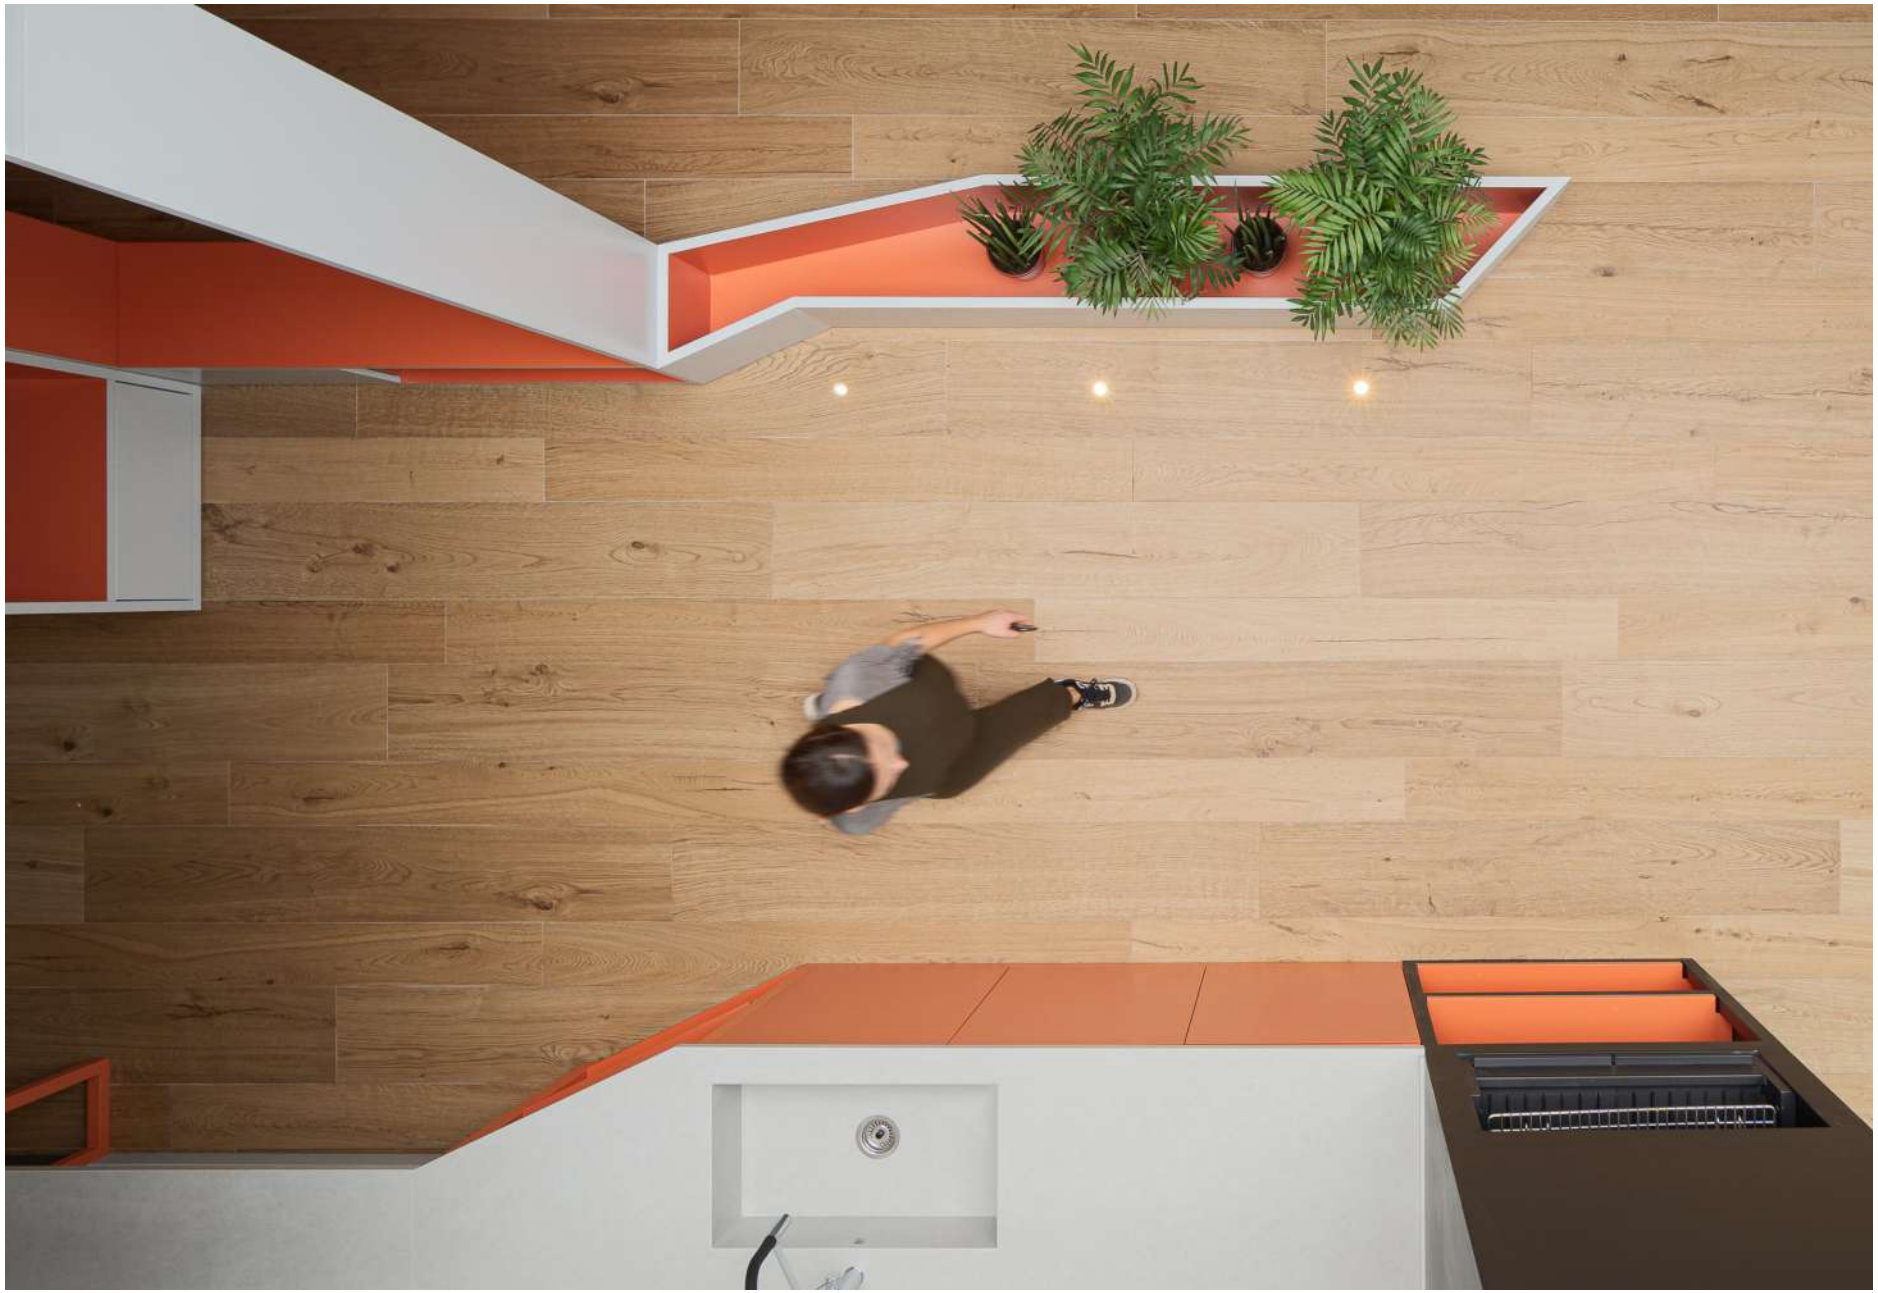

Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

Optic





Technical Information

Power	2W
Installation	Recessed
Color Temperature	3.000K
Lumens	55 lm
Material	Inox 304
Finishes	Brushed silver

Code	4331

Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 2.000Kg | 35° | 50/60 Hz | IK09 | +50°C -20°C | 1/50



	New	New	
Nano Sigma	Mini Sigma	Sigma	Sigma XL




















Technical Information

Power	3W	9W	12W	17W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K	3.000K
Lumens	210 lm	450 lm	650 lm	1.440 lm
Material	Stainlees steel + alumin.	Stainlees steel + alumin.	Stainlees steel + alumin.	Stainlees steel + alumin.
Finishes	Brushed silver	Brushed silver	Brushed silver	Brushed silver
Code	3.000K 4251	3.000K 5576	3.000K 5577	3.000K 4135
	PF >0,6 | 1/30	PF >0,5 | 1/12	PF >0,9 | 1/8	PF >0,9 | 1/8

Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Integrated driver. Drainage (min. 300mm).


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | CRI ≥80 | CABLE 24CM | 30° | 50/60 Hz | IK05 | +40°C -20°C

OUTDOOR




Caddie





Fade





Technical Information

	Caddie	Fade
Power	3W	5W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	200 lm / 270 lm	350 lm / 450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	Black / Corten

Code				Code			
●	2.200K	5678	New	●	2.200K	5680	New
●	3.000K	3581		●	3.000K	3580	
●	2.200K	5679	New	●	2.200K	5681	New
●	3.000K	4923		●	3.000K	4924	
		CRI ≥80				CRI ≥90	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included.


3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CABLE 24CM | 45° | 50/60 Hz | IK05 | +40°C -20°C | 1/50

OUTDOOR

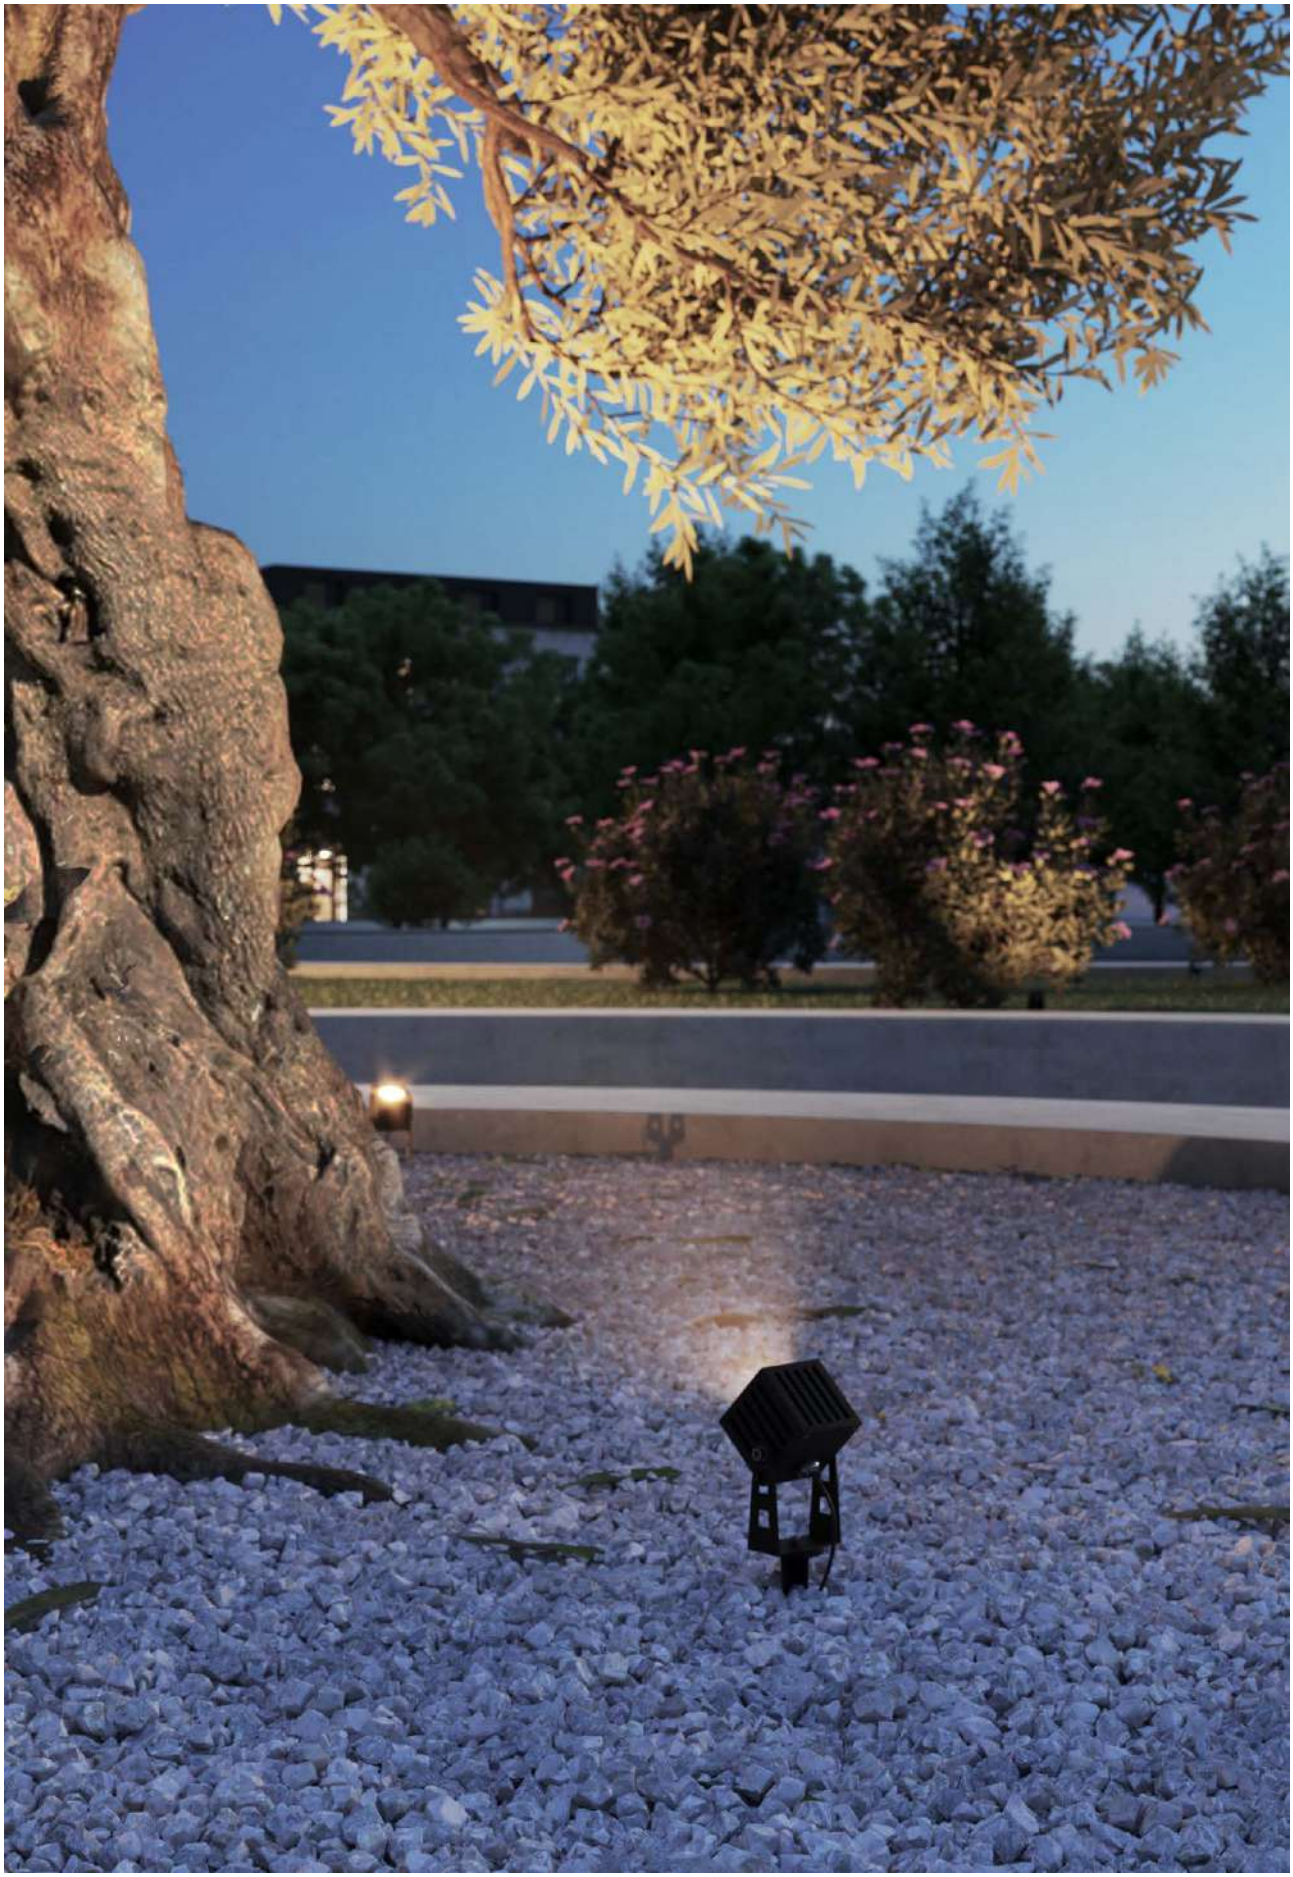


Zas r





Zas sq





Technical Information

	Zas r	Zas sq
Power	3W	7W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	3.000K / GREEN
Lumens	200 lm / 240 lm	450 lm / 380
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten

Code							
	●	2.200K	5682	New	□	3.000K	4690	
	●	3.000K	4134		■	3.000K	4692	
	●	2.200K	5683	New	■	GREEN	5694	New
	●	3.000K	4922		■	3.000K	4693	
					■	GREEN	5693	New

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05

220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included.


3 YEARS WARRANTY | IP 65 | CRI ≥80 | CABLE 24CM | 50/60 Hz | +40°C -20°C | 1/50

OUTDOOR

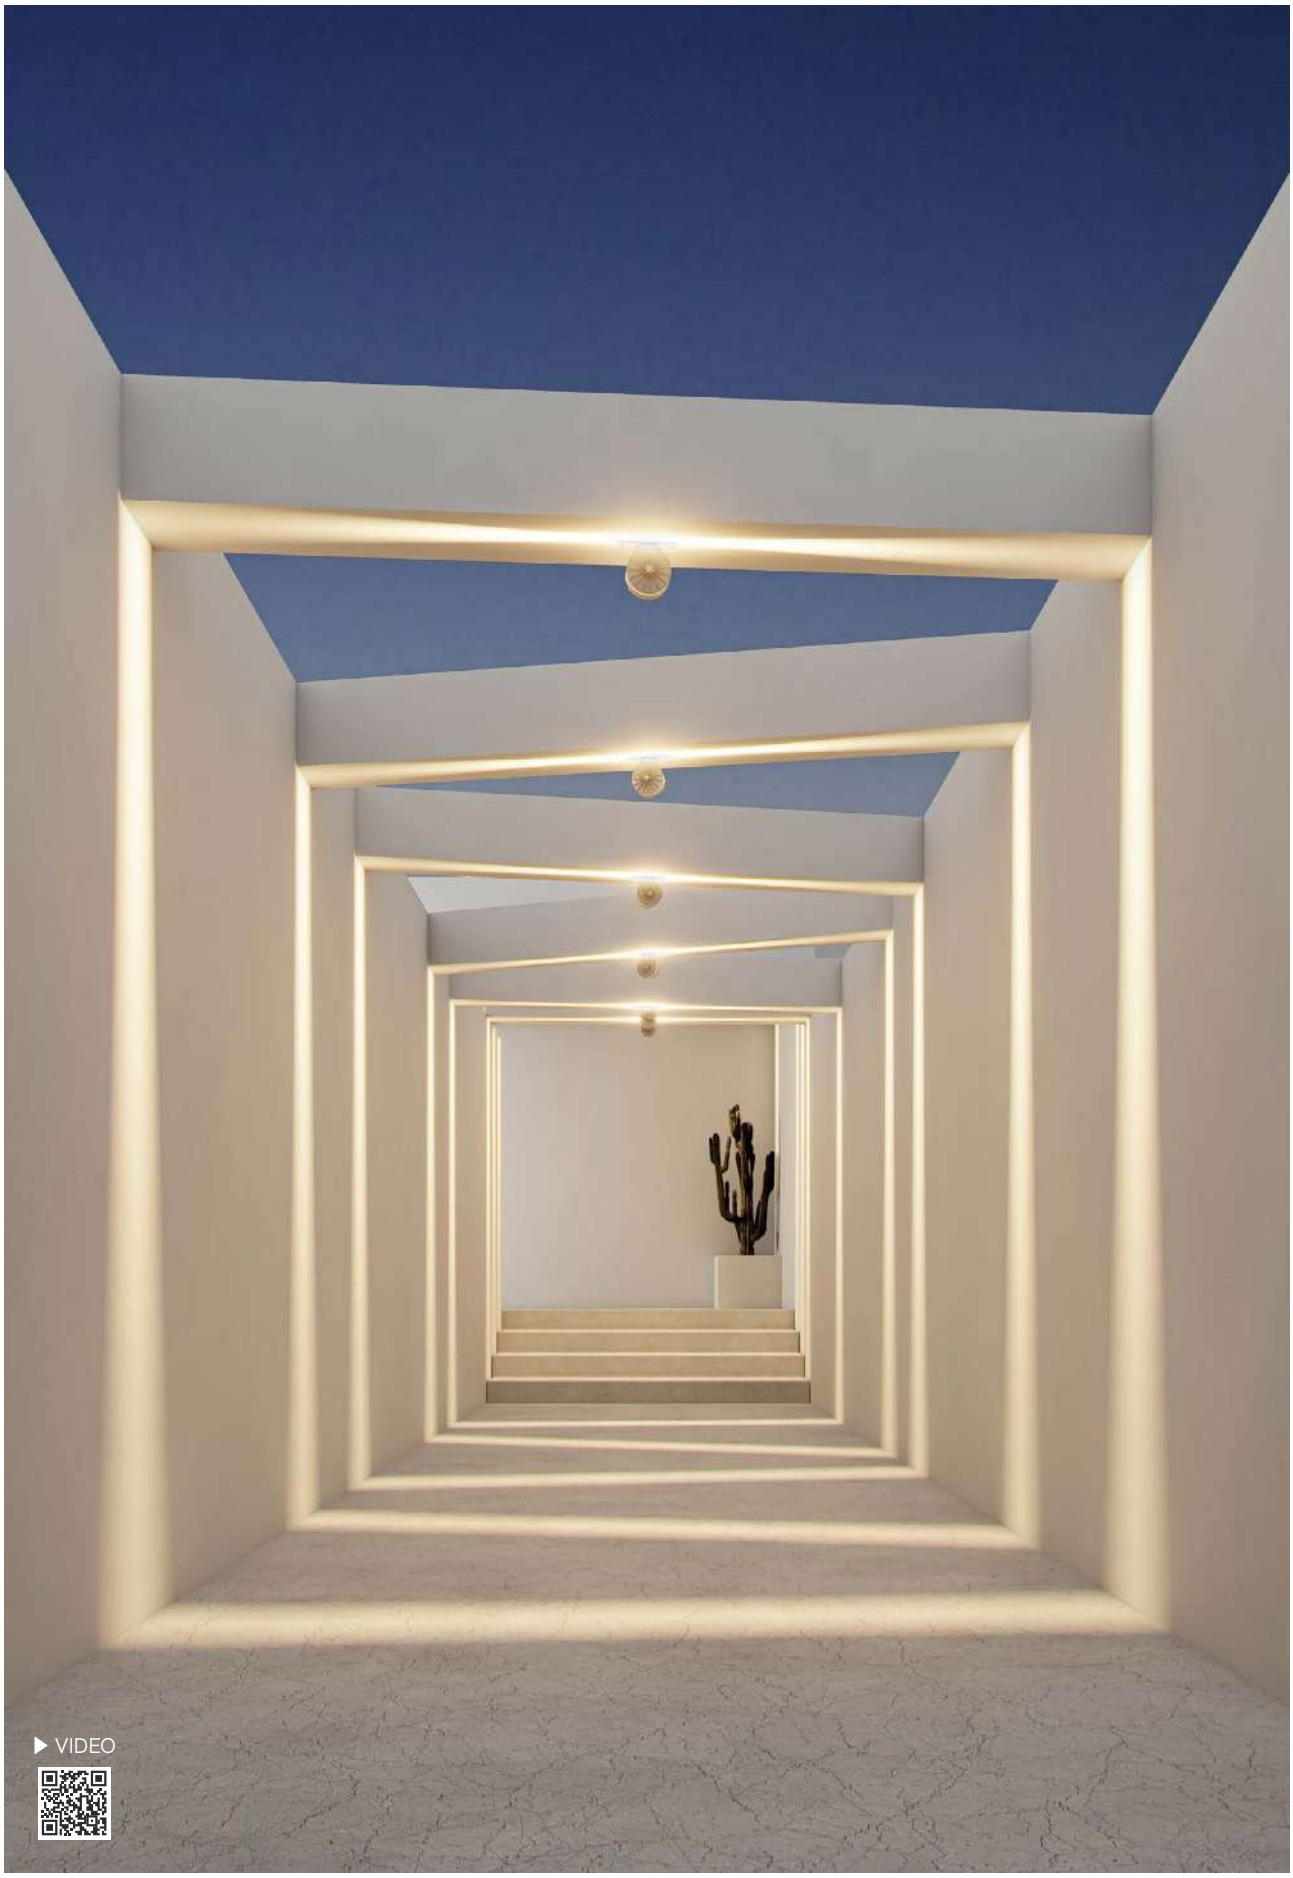
▶ VIDEO

Nik





Technical Information

Power	5W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	340 lm / 350 lm
Material	Aluminium
Finishes	Gray

Code			
	●	3.000K	4291
	●	4.000K	4292

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Integrated driver.


3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | 5° | 50/60 Hz | IK05 | +40°C -20°C | 1/40

OUTDOOR



Signal





Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3.000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray

Code	3.000K	4290

CE RoHS

*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 20CM | 30° | 50/60 Hz | IK05 | +40°C -20°C | 1/25


OUTDOOR






Sair





Sair XL





Technical Information

	Sair	Sair XL
Power	10W	20W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	450 lm / 900 lm	1.000 lm / 1.500 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code							
	○	3.000K	4894		○	3.000K	4897	
	●	2.200K	5674	New	●	2.200K	5676	New
	●	3.000K	4895		●	3.000K	4898	
	●	2.200K	5675	New	●	2.200K	5677	New
	●	3.000K	4896		●	3.000K	4899	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS EAC

*Spike included.


3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/265 VAC | PF >0,9 | CRI ≥90 | CABLE 24CM | 18° | 50/60 Hz | IK05 | +40°C -20°C | 1/20

OUTDOOR



Fix





Technical Information

Installation	Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27

Code	● 4820

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included. Recomended lamp Par 38 (page 697).


3 YEARS WARRANTY | IP 65 | | 50/60 Hz | 1/6

OUTDOOR



▶ VIDEO

Wech









Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3.000K / 4.000K / 5.000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black

Code	
	☐ 5004
	■ 5005

CE RoHS EMC


Clamp, lyre and charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 10 HOURS | 6 HOURS 4.400 mAh | USB-C 5V | IP 65 | CRI ≥80 | 110° | IK08 | +45°C -10°C | CCT SWITCH | 1/10



Sky 10W spike





Technical Information

Power	10W
Installation	Floor
Color Temperature	3.000K / GREEN
Lumens	1.000 lm / 820 lm
Material	Aluminium
Finishes	Corten

Code			
	3.000K	4340
	GREEN	4341

Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS


*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV | 1/32

OUTDOOR


Sky 10W switch





Sky 20W switch





Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.200 lm	2.400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray

Code		
	☐ 4679	☐ 4682
	■ 4680	■ 4683
	■ 4681	■ 4684
	1/32	1/24

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV


Sky 30W switch





Sky 40W switch





Technical Information

	Sky 30W switch	Sky 40W switch
Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	3.600 lm	4.800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray

Code		
	☐ 4685	☐ 4688
	■ 4686	■ 4689
	■ 4687	■ 4694
	1/24	1/12

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV




Sky 10W sensor






Sky 30W sensor





Sky 50W sensor





Technical Information

	Sky 10W sensor	Sky 30W sensor	Sky 50W sensor
Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K	4.000K / 5.000K
Lumens	1.150 lm / 1.200 lm	3.550 lm / 3.600 lm	5.950 lm / 6.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code								
	☐	4.000K	4349	☐	4.000K	4352	☐	4.000K	4354
	☐	5.000K	4350	☐	5.000K	4353	☐	5.000K	4355
	■	4.000K	4308	■	4.000K	4309	■	4.000K	4311
	■	5.000K	4351	■	5.000K	4310	■	5.000K	4356
			1/32			1/24			1/12

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New




X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec 5 min | 1m 7m | ON OFF | >1KV


Sky 10W






Sky 20W





Sky 30W





Technical Information

	Sky 10W	Sky 20W	Sky 30W
Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5.000K	2.700K / 4.000K / 5.000K	2.700K / 3.000K / 4.000K
Lumens	1.150 lm	2.250 lm / 2.400 lm / 2.450 lm	3.450 lm / 3.500 lm / 3.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White	Black / Corten	Corten

Code			
	☐ 5.000K 4254	■ 5.000K 4266	■ 2.700K 4279
		■ 2.700K 4401	■ 4.000K 4280
		■ 4.000K 4402	
	1/36	1/32	1/24

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV


Sky 100W	Sky 150W	Sky 200W














Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957
	1/4	1/2	1/2

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >2KV

OUTDOOR




Club Tennis Olesa, Olesa de Montserrat, Design: Padel 10. (Spain).


Polaris 100W	Polaris 150W	Polaris 200W














Technical Information

	Polaris 100W	Polaris 150W	Polaris 200W
Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K
Lumens	12.700 lm / 13.000 lm / 13.200 lm	19.200 lm / 19.500 lm / 19.700 lm	25.700 lm / 26.000 lm / 26.200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black

Code						
	■	3.000K	4513	■ 3.000K	4516	■ 3.000K 4519
	■	4.000K	4514	■ 4.000K	4517	■ 4.000K 4520
	■	5.000K	4515	■ 5.000K	4518	■ 5.000K 4521
	1/4			1/3		1/3

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >6KV

OUTDOOR



Krion 300W






5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

Krion 400W





5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx

Technical Information

	Krion 300W	Krion 400W
Power	300W	400W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	39.000 lm / 39.300 lm	52.000 lm / 52.300 lm
Material	Aluminium	Aluminium
Finishes	Black	Black

Code	Krion 300W	Krion 400W
	■ 4.000K 4509	■ 4.000K 4510
	■ 5.000K 4511	■ 5.000K 4512

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | >6KV | 1




Clos base mini






Clos dual base mini






Clos base





Clos dual base





Technical Information

Installation	Floor	Floor	Floor	Floor
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	○ 4882	○ 4888	○ 4885	○ 4891
	● 4883	● 4889	● 4886	● 4892
	● 4884	● 4890	● 4887	● 4893
	1/24	1/24	1/12	1/12

Accessories (page 565).



Clos wall
○ 4876
● 4877
● 4878




Clos wall dual
○ 4879
● 4880
● 4881

CE RoHS


5 YEARS WARRANTY | IK08

OUTDOOR

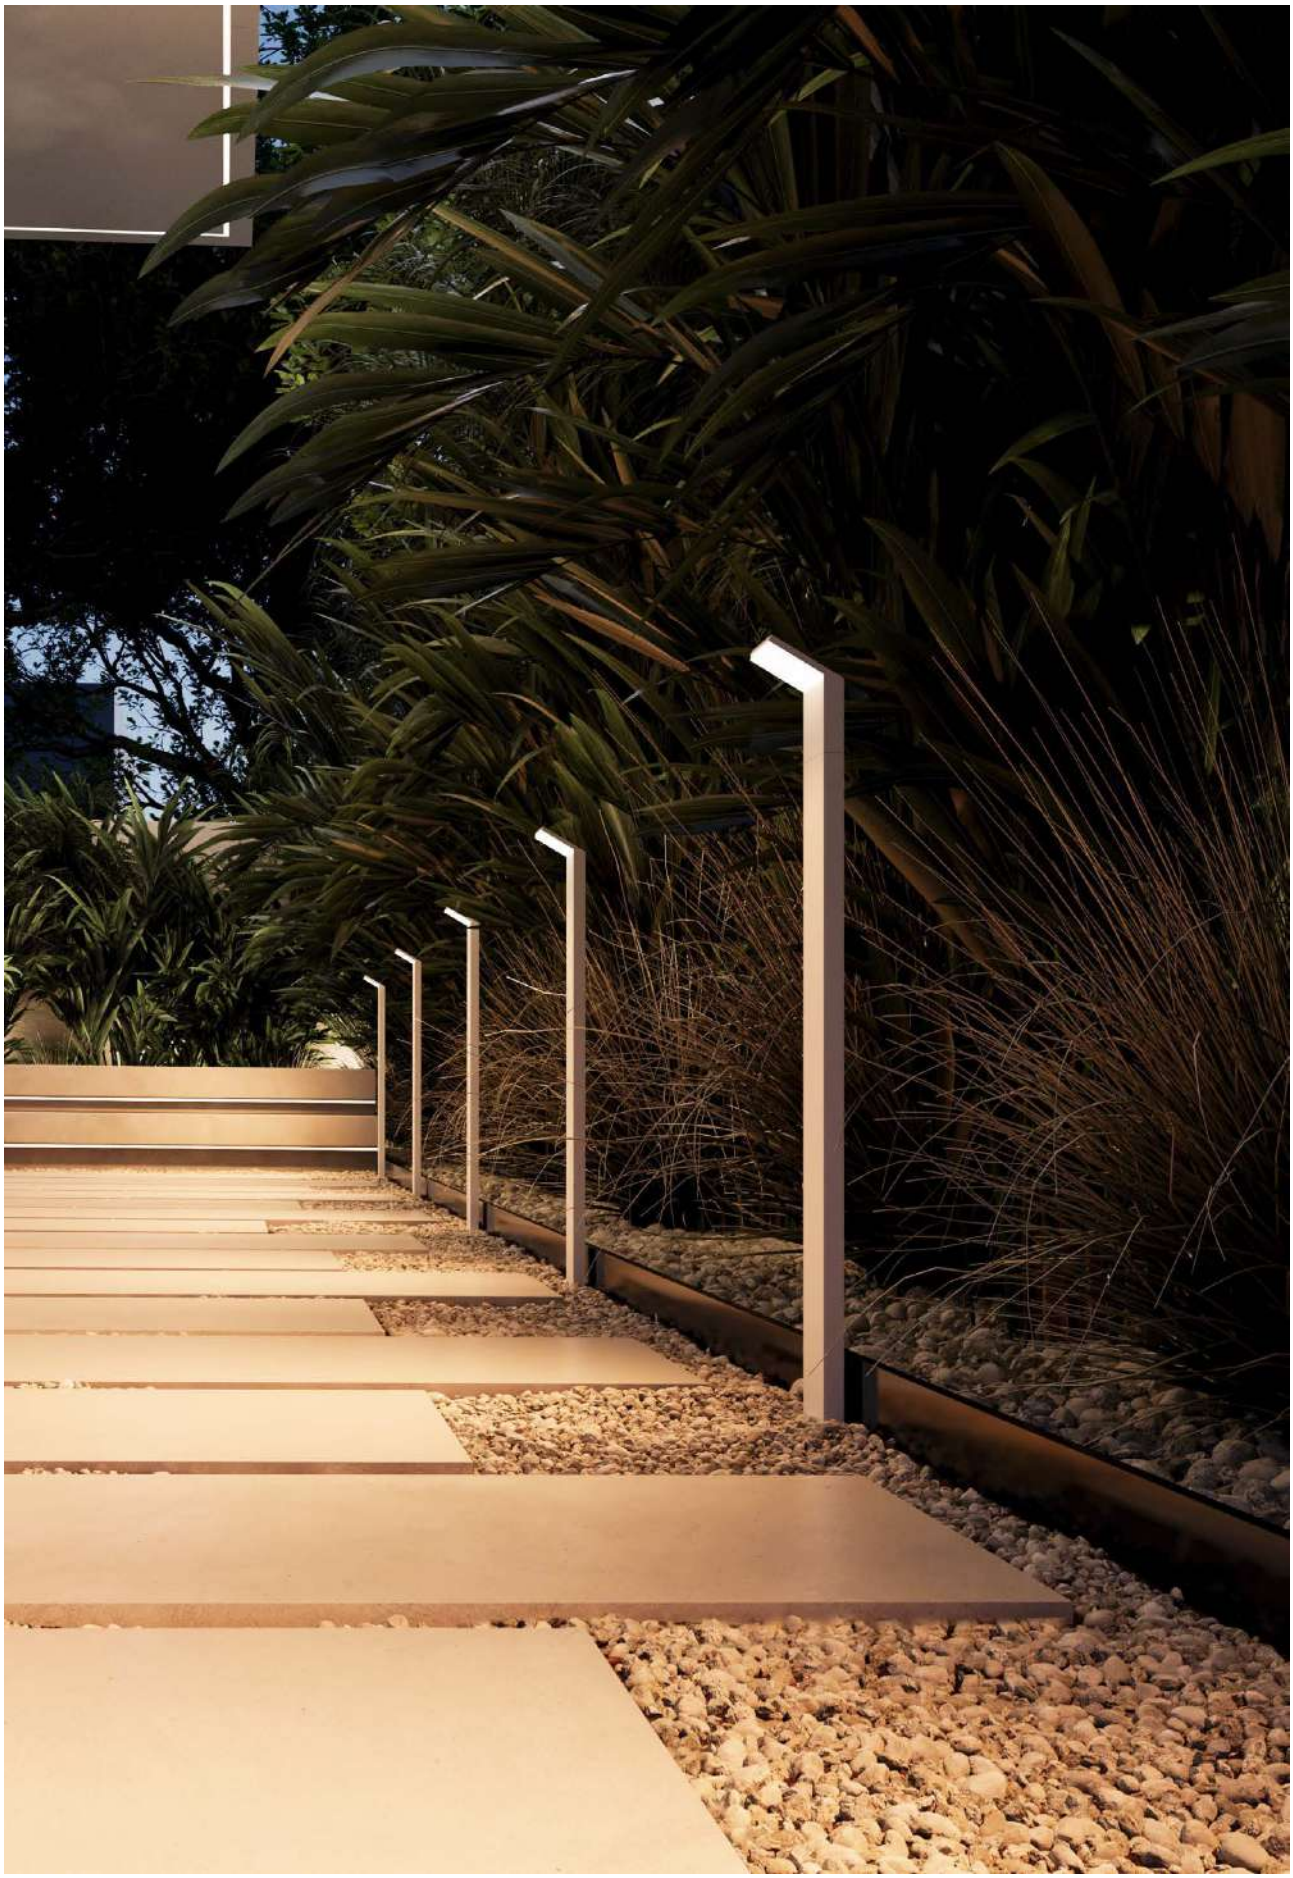


Cam





Cam XL





Technical Information

	Cam	Cam XL
Power	9W	9W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	690 lm / 700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code			Cam		Cam XL
	☐	3.000K	4709	3751	
	☐	4.000K	3586	3752	
	■	3.000K	4710	3753	
	■	4.000K	3590	3754	
			1/4	1/2	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 54 | 220/240 VAC | PF >0,7 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C

OUTDOOR




Mac floor





Mac floor XL





Technical Information

	Mac floor	Mac floor XL
Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	890 lm / 900 lm	890 lm / 900 lm
Material	Aluminium and Polycarbonate	Aluminium and Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code						
	○	3.000K	4837	○	3.000K	4843
	○	4.000K	4838	○	4.000K	4844
	●	3.000K	4839	●	3.000K	4845
	●	4.000K	4840	●	4.000K	4846
	●	3.000K	4841	●	3.000K	4847
	●	4.000K	4842	●	4.000K	4848
			1/12			1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR




Tura





Tura XL





Technical Information

	Tura	Tura XL
Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	950 lm / 960 lm	950 lm / 960 lm
Material	Aluminium and Methacrylate	Aluminium and Methacrylate
Finishes	White / Black / Corten	White / Black / Corten

Code	Tura			Tura XL		
	○	3.000K	4849	○	3.000K	4855
	○	4.000K	4850	○	4.000K	4856
	●	3.000K	4851	●	3.000K	4857
	●	4.000K	4852	●	4.000K	4858
	●	3.000K	4853	●	3.000K	4859
	●	4.000K	4854	●	4.000K	4860
			1/6			1/4

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 180° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR








New

Twist





Technical Information

Power	1W
Installation	Floor
Color Temperature	Switch 2.700K / RGB
Lumens	20 lm
Material	ABS
Finishes	Black

Code	■ 5701


CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 10.000 HOURS | 7-8 HOURS | 5-8H. | 500 mAh | IP 54 | CRI ≥80 | 180° | IK04 | +45°C 0°C | ON OFF | CCT SWITCH | 1/20



Gam






Technical Information

Power	0,7W
Installation	Floor
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	85 lm
Material	ABS + PMMA
Finishes	Black

Code	■ 5178


CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 6-8 HOURS | 6-8H. | 1.800 mAh | IP 54 | CRI ≥80 | 270° | IK02 | +55°C -10°C | ON OFF | CCT SWITCH | 1/50

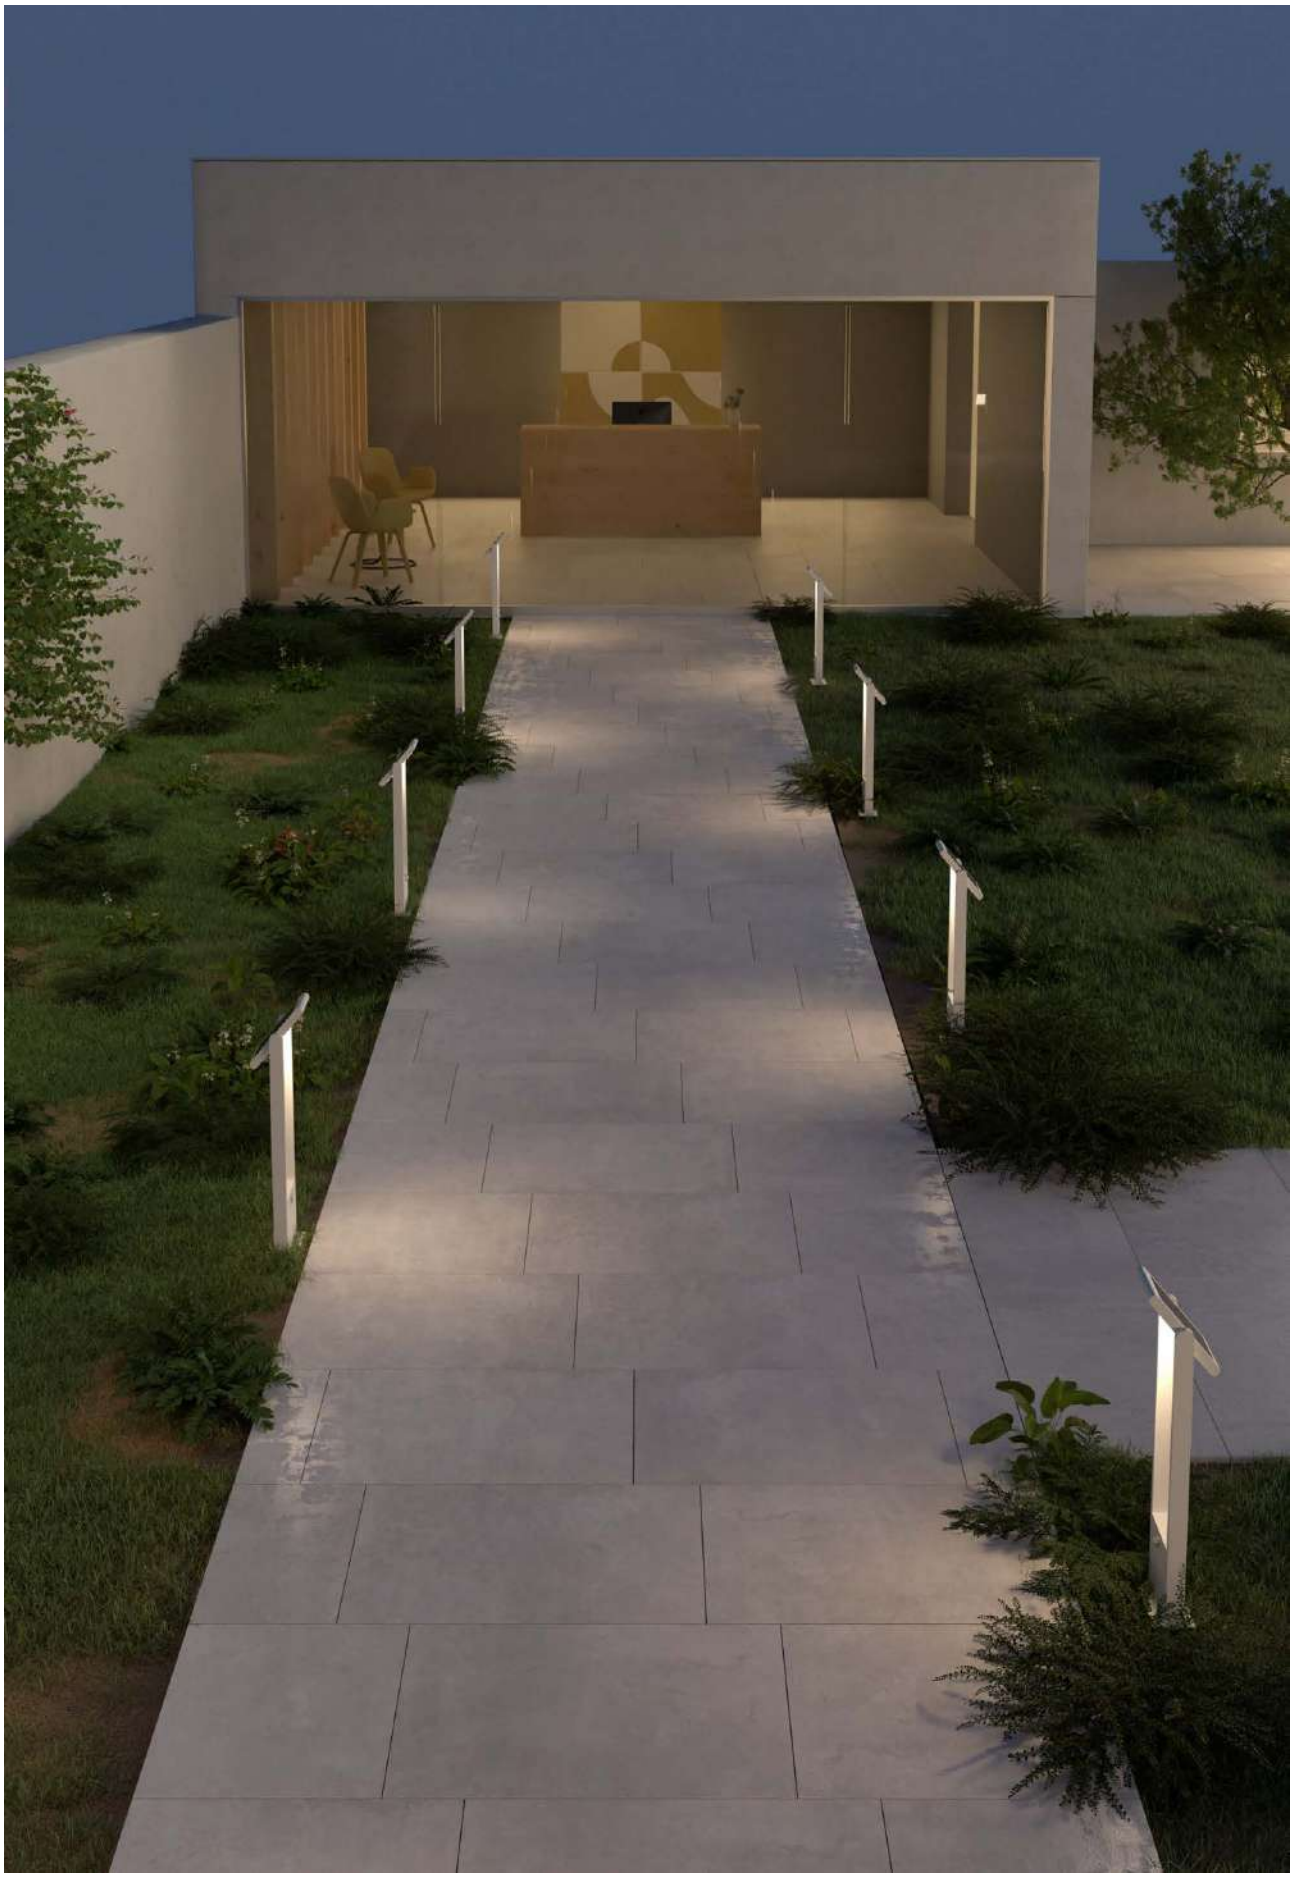


Popa





Popa XL



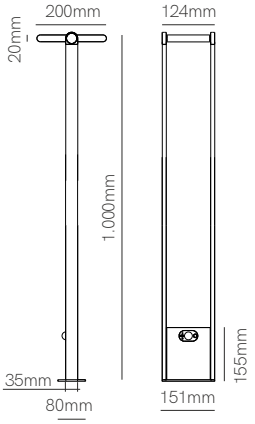

Technical Information

	Popa	Popa XL
Power	1,6W	1,6W
Installation	Floor	Floor
Color Temperature	4.000K	4.000K
Lumens	150 lm	150 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	☐ 3882	☐ 3884
	■ 3883	■ 3885


CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/2



Proa





Technical Information

Power	1,6W
Installation	Surface
Color Temperature	4.000K
Lumens	150 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3531
	■ 3532

CE RoHS


3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON | OFF | 8 sec 8 min | 1/6





Egna





Technical Information

Power	3W
Installation	Surface
Color Temperature	4.000K
Lumens	250 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3587
	■ 3592


CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 25.000 HOURS | 5-6 HOURS | 11% 20H. 100% 2-3H. | 4.500 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 1/8



Iris





Technical Information

Power	2,5W
Installation	Surface
Color Temperature	4.000K
Lumens	174 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3496
	■ 3497

CE RoHS


3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/6

OUTDOOR



Visor solar





Technical Information

Power	3,5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm
Material	Aluminium
Finishes	White / Black / Corten

Code	
	4209
	4193
	4194

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 10 HOURS | 8 HOURS | 4.500 mAh | IP 65 | CRI ≥80 | 120° | +45°C -25°C | ON OFF | 1/4




New

Sky solar sensor





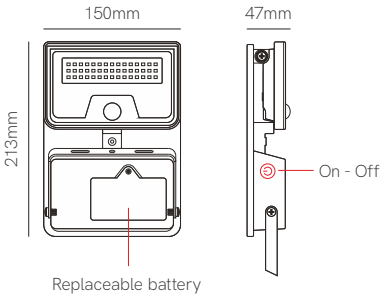

Technical Information

Power	8W
Installation	Surface
Color Temperature	4.000K
Lumens	1.600 lm
Material	Polycarbonate
Finishes	White / Black

Code	
	☐ 5572
	■ 5573

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 9 HOURS | 10% 12H. 100% 2H. | 4.000 mAh | IP 54 | CRI ≥80 | 120° | 4-6m | PIR SENSOR | ON | OFF | +45°C -20°C | 1/20

OUTDOOR



▶ VIDEO




Industrial

Ufo Lens switch
60W / 80W / 100W








Ufo Lens switch
90W / 120W / 150W








Technical Information

Power	Switch 60W / 80W / 100W	Switch 90W / 120W / 150W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	131-167 lm/W	128-167 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5147	● 5148

Accessories



Lira 100W/150W/200W
■ 4566

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1


Ufo Lens switch 120W / 160W / 200W	Ufo Lens switch 140W / 190W / 240W
















Technical Information

Power	Switch 120W / 160W / 200W	Switch 140W / 190W / 240W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	123-169 lm/W	125-156 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5149	● 5150

Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

Ufo Lens Dali 100W	Ufo Lens Dali 150W















Technical Information

Power	100W	150W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	16.000 lm / 16.200 lm	24.000 lm / 24.200 lm
Material	Aluminium	Aluminium
Finishes	Black	Black


Code		
	● 4.000K 4915	● 4.000K 4917
	● 5.000K 4916	● 5.000K 4918

Accessories



Lira 100W/150W/200W
■ 4566


CE RoHS EMC


5 YEARS WARRANTY | 50.000 HOURS |  | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 |  | CABLE 2M | 60° 90° 120°  | 50/60 Hz | IK10 | +50°C -30°C | >4KV  |  |

Ufo Lens Dali 200W	Ufo Lens Dali 240W










Technical Information


Power	200W	240W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K
Lumens	32.000 lm / 32.200 lm	38.400 lm
Material	Aluminium	Aluminium
Finishes	Black	Black

Code	● 4.000K 4919	● 4.000K 4921
	● 5.000K 4920	

Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1

INDUSTRIAL





Rotable Lens

Ufo lens 100W

1m	5m	11m
9.113 lx	365 lx	75 lx

1m	5m	10m
7.867 lx	315 lx	79 lx

1m	5m	10m
6.638 lx	266 lx	66 lx

Ufo lens 150W

1m	7m	14m
13.670 lx	279 lx	70 lx

1m	6m	13m
11.800 lx	328 lx	70 lx

1m	6m	12m
9.956 lx	277 lx	69 lx

Ufo lens 200W

1m	8m	16m
18.226 lx	225 lx	71 lx

1m	7m	15m
15.733 lx	321 lx	70 lx

1m	7m	14m
13.275 lx	271 lx	68 lx

Ufo lens 240W

1m	9m	19m
26.635 lx	329 lx	74 lx

1m	9m	19m
26.654 lx	292 lx	73 lx

1m	9m	19m
15.882 lx	324 lx	68 lx




Position the DIP switches to set the power.

1	2	3	4	W	lm
ON	ON	ON	ON	320W	47.040lm
ON	ON	ON	OFF	300W	44.100lm
ON	ON	OFF	ON	290W	42.630lm
ON	ON	OFF	OFF	275W	40.425lm
ON	OFF	ON	ON	260W	38.220lm
ON	OFF	ON	OFF	245W	36.015lm
ON	OFF	OFF	ON	230W	33.810lm
ON	OFF	OFF	OFF	215W	31.605lm
OFF	ON	ON	ON	200W	29.400lm
OFF	ON	ON	OFF	185W	27.195lm
OFF	ON	OFF	ON	170W	24.990lm

DIP Switch

Dual In-line Package




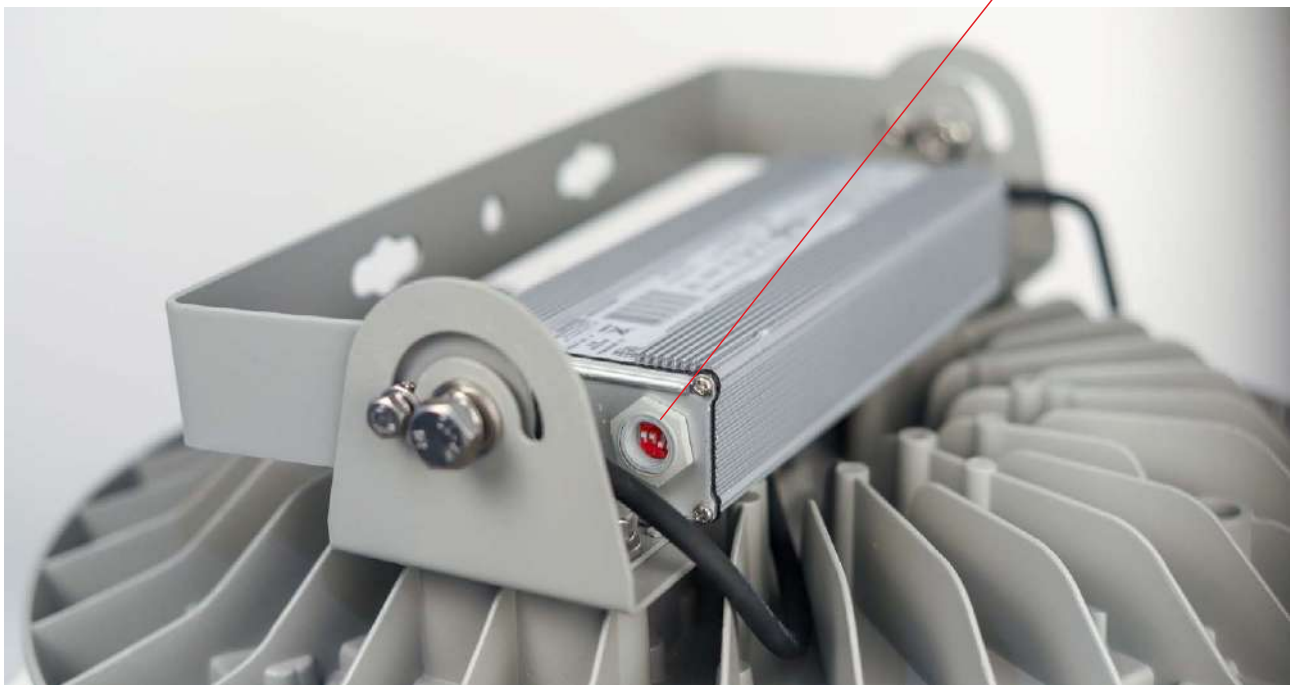

Ufo 300W







1m	7m	14m
14.401 lx	294 lx	73lx

Technical Information

Power	300W
Installation	Surface
Color Temperature	4.000K
Lumens	39.000 lm
Material	Aluminium
Finishes	Gray


Code	4.000K 3972

CE RoHS EMC

*Lira included.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 110° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | 1



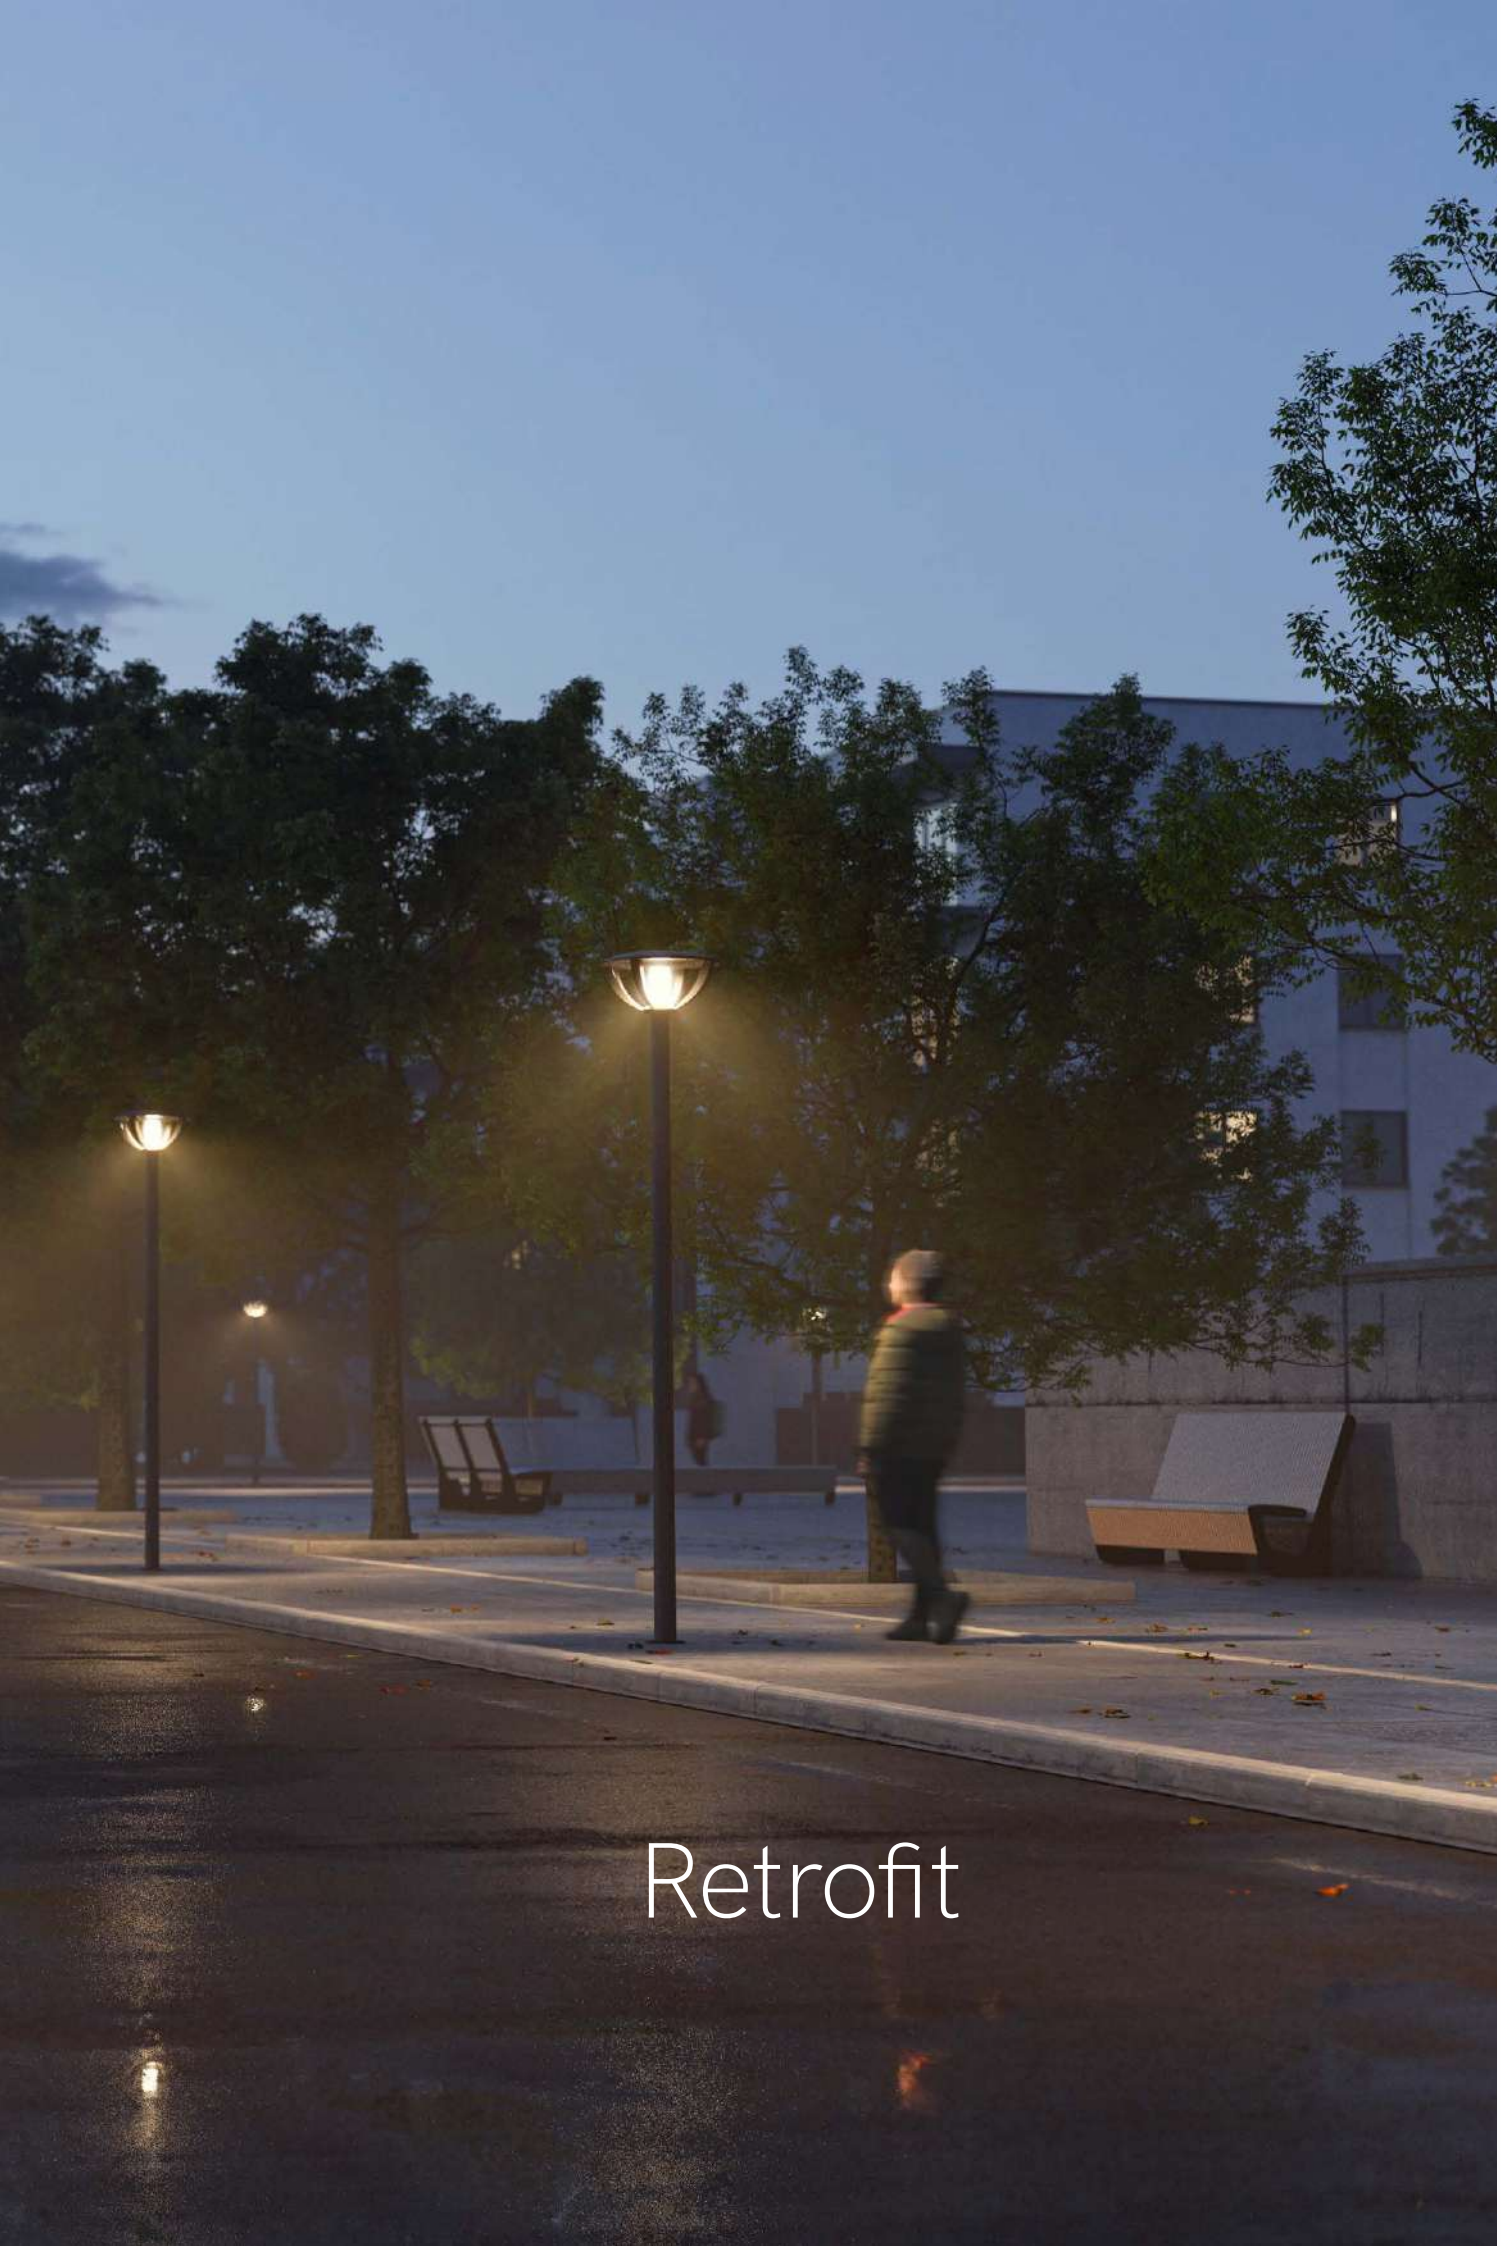


Retrofit

Tutto MR11








Tutto GU10







Technical Information

Power	4W	4W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	240 lm / 250 lm / 260 lm	285 lm / 300 lm / 315 lm

Code	2.700K	3447	2.700K	3444
	3.000K	3448	3.000K	3445
	4.000K	3449	4.000K	3446
	12V AC/DC		220/240 VAC	


CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Hook GU10	Hook GU10 dimmable









Technical Information

Power	6W	6W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	570 lm / 594 lm / 616 lm	570 lm / 594 lm / 616 lm

Code	2.700K	4023	2.700K	3654-N
	3.000K	4024	3.000K	3655-N
	4.000K	4025	4.000K	3656-N

TRIAC DIMM

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50


Uniform-line MR16	Uniform-line GU10	Uniform-line GU10 dimmable














Technical Information

	Uniform-line MR16	Uniform-line GU10	Uniform-line GU10 dimmable
Power	6W	6W	6W
Color Temperature	2.700K/3.000K/4.000K/5.000K	2.700K/3.000K/4.000K/5.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm/510 lm/545 lm/560 lm	480 lm/510 lm/545 lm/560 lm	490 lm / 500 lm / 530 lm

Code					
	2.700K	4019-V2	2.700K	4015-V2	2.700K 4227
	3.000K	4020-V2	3.000K	4016-V2	3.000K 4228
	4.000K	4021-V2	4.000K	4017-V2	4.000K 4229
	5.000K	4022-V2	5.000K	4018-V2	

12V AC/DC | 220/240 VAC | 220/240 VAC | TRIAC DIMM


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

Narrow GU10 dimmable







Technical Information

Power	7W
Color Temperature	2.700K / 3.000K
Lumens	400 lm / 420 lm


Code	2.700K	4672
	3.000K	4671

CE RoHS EMC


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 15° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50

System MR16	System GU10	System GU10 dimmable














Technical Information

Power	8W		8W			8W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K		
Lumens	725 lm / 780 lm / 825 lm		725 lm / 780 lm / 825 lm			660 lm / 700 lm / 750 lm		
Code	2.700K	3435-N	2.700K	3432-N		2.700K	3492-N	
	3.000K	3436-N	3.000K	3433-N		3.000K	3493-N	
	4.000K	3437-N	4.000K	3434-N		4.000K	3494-N	
	12V AC/DC		220/240 VAC			220/240 VAC	TRIAC DIMM	


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

R-63 s-line GU10







Technical Information

Power	8W
Color Temperature	2.700K
Lumens	720 lm
Code	4003

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50


Power MR16	Power GU10	Power GU10 dimmable

















Technical Information

Power	12W		10W / 12W			12W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K		
Lumens	900 lm / 950 lm / 1.000 lm		950 lm / 1.000 lm / 1.050 lm			950 lm / 1.000 lm / 1.050 lm		
Code	2.700K	3441	12W	2.700K	3438	2.700K	3489	
	3.000K	3442	10W	3.000K	4295	3.000K	3490	
	4.000K	3443	10W	4.000K	4296	4.000K	3491	
	12V AC/DC		220/240 VAC			220/240 VAC	TRIAC DIMM	

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Lynk G53	Lynk GU10	Lynk GU10 dimmable






















Technical Information


Power	13W		13W			13W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K		
Lumens	880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm			880 lm / 900 lm / 950 lm		
Code	2.700K	3452	2.700K	3455		2.700K	3464	
	3.000K	3453	3.000K	3456		3.000K	3465	
	4.000K	3454	4.000K	3457		4.000K	3466	
	12V AC/DC		220/240 VAC			220/240 VAC	TRIAC DIMM	

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30


AR111 15° G53





AR111 15° GU10





Technical Information

Power	15W	15W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.350 lm / 1.400 lm / 1.500 lm	1.350 lm / 1.400 lm / 1.500 lm

Code	2.700K	5187	2.700K	5190
	3.000K	5188	3.000K	5191
	4.000K	5189	4.000K	5192
	PF >0,5 | 12V AC/DC		PF >0,9 | 220/240 VAC	


CE RoHS EMC

3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C -20°C | 10/30

Nitro GU10








Dole GU10







Technical Information

	Nitro GU10	Dole GU10
Power	15W	15W
Color Temperature	2.700K	2.700K / 3.000K / 4.000K
Lumens	1.000 lm	1.050 lm / 1.100 lm / 1.120 lm


	Nitro GU10	Dole GU10	
Code	3470	2.700K	3467
		3.000K	3468
		4.000K	3469

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

Shop E14





Prisma E14





Technical Information


Power	2W	4W
Color Temperature	3.000K	3.000K
Lumens	180 lm	340 lm
Code	3450	3474-M

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,3 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Flama E14/E27





Flama dimmable E14





Technical Information

Power	5,5W	5,5W
Color Temperature	2.700K / 3.000K / 5.000K	3.000K
Lumens	450 lm / 500 lm / 550 lm	418 lm

Code					
	2.700K	E14	592122-FL2	3.000K	592122R-C3
	2.700K	E27	592122-FL2E		
	3.000K	E14	592122-FL3		
	3.000K	E27	592122-FLE3		
	5.000K	E14	3534		


TRIAC DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Esférica 5W E14/E27






Esférica 5,5W E14/E27 dimmable





Esférica 7W E14/E27





Technical Information


Power	5W		5,5W		7W		
Color Temperature	2.700K/3.000K/4.000K/5.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K		
Lumens	440 lm/462 lm/484 lm/495 lm		396 lm / 418 lm / 440 lm		700 lm/750 lm/800 lm/820 lm		
Code	2.700K	E14	592563-4C2(N)	2.700K	E14	592563R-C2	2.700K	E14	4243
	2.700K	E27	5925631-4C2(N)	2.700K	E27	592563R1-C2	2.700K	E27	4244
	3.000K	E14	592563(N)-4C(N2)	3.000K	E14	592563R-C3	3.000K	E14	4245
	3.000K	E27	5925631(N)-4C(N2)	3.000K	E27	592563R1-C3	3.000K	E27	4246
	4.000K	E14	592563(N)-4F(N2)	4.000K	E14	592563R-F4	4.000K	E14	4247
	4.000K	E27	5925631(N)-4F(N2)	4.000K	E27	592563R1-F4	4.000K	E27	4248
	5.000K	E14	3538(N)				5.000K	E14	4249
	5.000K	E27	3537(N)				5.000K	E27	4250
	5 YEARS WARRANTY | 50.000 HOURS | IP 40			3 YEARS WARRANTY | 25.000 HOURS | IP 40 | TRIAC DIMM			3 YEARS WARRANTY | 25.000 HOURS | IP 20		

CE RoHS EMC

220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Standard 6W E27





Standard 9W E27





Technical Information

	6W	9W
Power	6W	9W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K/3.000K/4.000K/5.000K
Lumens	534 lm / 550 lm / 660 lm	880 lm/891 lm/935 lm/945 lm


Code				
	2.700K	592125S-6(N)	2.700K	592125SC-2(N)
	3.000K	592125S-6C(N)	3.000K	592125SC-3(N)
	4.000K	592125S-6F(N)	4.000K	592125SC-4(N)
			5.000K	3539(N)

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Standard 12W E27





Standard 15W E27





Technical Information

	12W	15W
Power	12W	15W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.100 lm / 1.122 lm / 1.144 lm	1.550 lm / 1.600 lm / 1.650 lm

Code				
	2.700K	3479(N)	2.700K	3482(N)
	3.000K	3480(N)	3.000K	3483(N)
	4.000K	3481(N)	4.000K	3484(N)

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Standard 10W E27 dimmable	Standard 12W E27 dimmable	Standard 17W E27 dimmable














Technical Information

Power	10W		12W		17W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K		
Lumens	880 lm / 891 lm / 935 lm		1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm		
Code	2.700K	592125R-C	2.700K	592125R2-C	2.700K	3527	
	3.000K	592125R-C3	3.000K	592125R2-C3	3.000K	3528	
	4.000K	592125R-F	4.000K	592125R2-F	4.000K	3529	
					5.000K	3530	

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50


Micro globo 6W E27	Globo 10W E27	Globo 10W E27 dimmable














Technical Information


Power	6W		10W		10W		
Color Temperature	2.700K / 3.000K		2.700K / 3.000K / 4.000K		3.000K		
Lumens	480 lm / 500 lm		1.100 lm / 1.130 lm / 1.180 lm		800 lm		
Code	2.700K	505143E-C	2.700K	3524	3.000K	505119DIM-C	
	3.000K	3881	3.000K	3525			
			4.000K	3526			
	5 YEARS WARRANTY | 50.000 HOURS		3 YEARS WARRANTY | 25.000 HOURS		3 YEARS WARRANTY | 25.000 HOURS | TRIAC DIMM		

CE RoHS EMC

IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40


Globo 15W E27






Globo 16W E27





Globo 22W E27





Technical Information


	15W	16W	22W
Power	15W	16W	22W
Color Temperature	2.700K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.400 lm / 1.500 lm	1.600 lm / 1.700 lm / 1.750 lm	2.400 lm / 2.500 lm / 2.600 lm


Code					
	2.700K	4677	2.700K	3521	2.700K 3518
	4.000K	4678	3.000K	3522	3.000K 3519
			4.000K	3523	4.000K 3520


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40

R-39 E14	R-50 E14	R-63 E27
		







R-39 R-50 R-63


Technical Information


Power	3W	5W	8W
Color Temperature	3.000K	3.000K	3.000K
Lumens	308 lm	385 lm	660 lm
Code	592122R39-2	5920731-(N2)	592072-1
	IP 40	IP 40	IP 20


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

R-80 E27	R-90 2.200K E27	R-90 3.000K E27
		







R-80 R-90

Technical Information


Power	10W	12W	12W
Color Temperature	3.000K	2.200K	3.000K
Lumens	891 lm	850 lm	1.100 lm
Code	592076-C3(N)	4137	592074-C(N)

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40

Pl T40 E27








Technical Information

Power	10W
Color Temperature	3.000K / 4.000K
Lumens	825 lm / 880 lm

Code	3.000K	582L016T40E-C3
	4.000K	582L016T40E-F

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Par 30 E27	Par 38 3.000K E27	Par 38 Green E27
		
		

PAR 30 PAR 38

Technical Information


Power	10W	15W	15W
Color Temperature	3.000K	3.000K	GREEN
Lumens	660 lm	1.100 lm	190 lm
Code	171160P30-C	171160P38(N)-C	3579
	45°	30°	30°

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

Sil E27





Technical Information

Power	20W
Color Temperature	2.700K / 4.000K
Lumens	2.035 lm / 2.550 lm


Code		
	2.700K	592165SIL-C
	4.000K	592165SIL-F

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 360° | 50/60 Hz | +40°C -20°C | 6/24


Aria 30W E27/E40





Aria 50W E27/E40





Technical Information

	30W	50W
Power	30W	50W
Color Temperature	2.700K / 5.000K	2.700K / 5.000K
Lumens	3.100 lm / 3.550 lm	5.400 lm / 6.200 lm


Code						
	2.700K	E27	3854	2.700K	E27	3858
	2.700K	E40	3856	2.700K	E40	3860
	5.000K	E27	3855	5.000K	E27	3859
	5.000K	E40	3857	5.000K	E40	3861

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | > 1KV | ENCLOSED NO | 6/24


Obo 19W E27





Obo 27W E27





Technical Information

	Obo 19W E27	Obo 27W E27
Power	19W	27W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	1.425 lm / 1.900 lm	2.025 lm / 3.000 lm


Code	2.200K	3909	2.200K	3910
	5.000K	3917	5.000K	3918

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16


Obo 36W E27/E40





Obo 45W E27/E40





Technical Information

	36W	45W
Power	36W	45W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	2.700 lm / 3.900 lm	3.375 lm / 4.500 lm


Code						
	2.200K	E27	3911	2.200K	E27	3912
	2.200K	E40	3920	2.200K	E40	3923
	5.000K	E27	3919	5.000K	E27	3922
	5.000K	E40	3921	5.000K	E40	3924

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16


Smile 20W E27






Smile 40W E27





Smile 60W E40





Technical Information


	Smile 20W E27	Smile 40W E27	Smile 60W E40
Power	20W	40W	60W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K	2.200K / 5.000K
Lumens	2.000 lm / 3.000 lm	4.000 lm / 6.000 lm	6.000 lm / 9.000 lm
Code	2.200K 3913	2.200K 3914	2.200K 3915
	5.000K 3925	5.000K 3926	5.000K 3927
	24	12	12

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK

Cup 45W E27/E40





Technical Information

Power	45W
Color Temperature	3.000K
Lumens	3.960 lm


Code		
3.000K	E27	592141-C3E2
3.000K	E40	592141-E4C3

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 6


Noa 80W E27/E40





Noa 85W E27/E40





Technical Information

Power	80W	85W
Color Temperature	2.200K	2.700K / 5.000K
Lumens	5.900 lm	9.700 lm / 10.200 lm


Code	2.200K	E27/ E40	3965	2.700K	E27	3902
				2.700K	E40	3900
				5.000K	E27	3903
				5.000K	E40	3901

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 8

Adn G4





Technical Information

Power	2,5W
Color Temperature	3.000K
Lumens	198 lm


Code	130L006

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,6 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Uniform-line G4





Uniform-line long G4





Technical Information

Power	1,3W	1,6W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	150 lm / 158 lm	203 lm / 223 lm


Code	3.000K	130L006-2	3.000K	130L195-C
	5.000K	130L006-2F	5.000K	130L195-D

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


Uniform-line G9





Uniform-line long G9





Technical Information

Power	2,5W		2,8W	
Color Temperature	3.000K / 5.000K		3.000K / 5.000K	
Lumens	242 lm / 250 lm		308 lm / 314 lm	
Code	3.000K	130L184-5	3.000K	130L195-A
	5.000K	130L184-5F	5.000K	130L195-B


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Max BA15d







Technical Information

Power	7W
Color Temperature	2.700K
Lumens	500 lm


Code	3569

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30


Cala 9W G24





Cala 10W G24





Technical Information

	9W	10W
Power		
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	880 lm / 935 lm	1.100 lm / 1.155 lm


Code				
	3.000K	582L015-C3	3.000K	582L015-C3B
	4.000K	582L015-F4	4.000K	582L015-F4B

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C -20°C | 10/50


Lineal tubular 5W R7S






Lineal tubular 9W R7S





Lineal tubular 9W R7S dimmable





Technical Information


Power	5W		9W		9W		
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K		
Lumens	561 lm / 574 lm		935 lm / 1.000 lm		935 lm / 1.000 lm		
Code	3.000K	140026-C3T	3.000K	141123-TC3	3.000K	141123-TC3D	
	4.000K	140026-F4T	4.000K	141123-TF4	4.000K	141123-TF4D	
		3 YEARS WARRANTY		3 YEARS WARRANTY		4 YEARS WARRANTY	TRIAC DIMM

CE RoHS

25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 6/30


Lineal 9W R7S






Lineal tubular 11W R7S dimmable





Lineal 13W R7S





Technical Information

Power	9W		11W		13W		
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K / 5.000K		
Lumens	858 lm / 880 lm		1.210 lm / 1.280 lm		1.700 lm / 1.780 lm / 1.800		
Code	3.000K	140L026L	3.000K	3477	3.000K	3904	
	4.000K	140L0261L	4.000K	3478	4.000K	3905	
					5.000K	3906	


IP 20 | 120° | IP 40 | 360° | TRIAC DIMM | IP 40 | 160°

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 6/30


HQI tubular E27






HQI tubular G12





HQI tubular RX7S





Technical Information

	HQI tubular E27		HQI tubular G12		HQI tubular RX7S	
Power	10W		10W		13W	
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K	
Lumens	1.000 lm / 1.030 lm		1.000 lm / 1.030 lm		1.320 lm / 1.375 lm	
Code	3.000K	3570	3.000K	592063-G12/3	3.000K	592063-TC
	4.000K	3571	4.000K	592063-G12/4	4.000K	592063-TF
	10/50		10/50		6/30	

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C

Conditions



PRICES UPDATE - INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.

TARIFA BENEITO FAURE - ACTUALIZACIÓN DIGITAL – PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.

GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. B E N E I T O FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obliged it to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to sate explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage.
Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistera la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui proprio prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso.Il listino prezzi e' inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e puo' essere aggiornato in qualsiasi momento se necessario.I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sara' processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso e' necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegre sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra..I resi non vengo rimborsati e devo essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il presso variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si fara' carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovra' essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sara' sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si fara' carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato.La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed e' necessario l'invio della contesazione via mail.La garanzia del prodotto si trova all'interno dell'imballo.Il dipartimento tecnico di BENEITO FAURE sara' l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. B E N E I T O F A U R E quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sara' valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non e' installato come da istruzioni
3. La ventilazione del prodotto non e' adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di propriertà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto.La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore.In caso di unione, trasformazione e/o adesione dei prodotti sotto la di proprieta' di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE.In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, cosi come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extra-contrattuale, ecc.Il cliente sarà obbligato in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato a fornirla. Se prima di effettuare il pagamento totale , la merce venduta fosse soggetta a qualsiasi tipo di sequestro o blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà le cui spese saranno a carico del cliente.

ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

DLIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung.Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.
BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produktes.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen ahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursaran hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS.
Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Éstas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.
Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.
Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.
El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:
1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o accesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la accesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por perdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o traba, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

Alphabetical Index (Name - Page)

Accesories custom system	162
Accesories led strips	310
Adapter 3PH	317
Adn G4	705
Air recessed	445
Alfa 3PH	339
Alp 48V	371
Alp 48V suspension	371
Alp space	499
Alp surface	465
AR111 15° G53	684
AR111 15° GU10	684
Argo recessed	409
Argo XL recessed	409
Aria 30W E27 / E40	699
Aria 50W E27 / E40	699
Ark suspension recessed	511
Ark suspension surface	511
Artis r wall	545
Artis sq wall	545
Aston 3PH	329
Atmos GU10 suspension	517
Atmos GU10 XL suspension	517
Atmos slim 48V IP	401
Atmos slim 48V mini	353
Atmos slim suspension	513
Atmos slim XL suspension	513
Atmos suspension	515
Atmos XL suspension	515
Atom recessed	411
Avant r recessed	457
Avant r surface	491
Avant sq recessed	457
Bag	597
Basculante recessed	449
Bathroom recessed	455
Beam wall	553
Bimba	599
Bit 48V IP	403
Blaber atmos	159
Blaber atmos slim	159
Blaber custom	151
Blaber evo	153
Blaber line	149
Blaber mac	157
Blaber mirrow	153
Blaber pick	147
Blaber r	151
Blaber sq	152
Blaber tax	161
Blaber trgl	161
Blaber zero direct	155
Blaber zero in XL	155
Blis r	583
Blis rect	583
Blis sq	583
Bonn recessed	447
Bora 48V suspension	373
Bora recessed	427
Bora space	501
Bora surface	463
Bora suspension recessed	523
Bora suspension surface	523
Bora XL space	501
Box 10	186
Box 11	184
Box 12	184
Box 13	185
Box 14	180
Box 15	171
Box 16	171
Box 17	172
Box 18	172
Box 19	186
Box 21	198
Box 22	194
Box 23	173
Box 24	189
Box 27	199
Box 28	205
Box 29	207
Box 30 12mm	209
Box 30 20mm	209
Box 32	193
Box 33	195
Box 35	179
Box 37	187
Box 38	179
Box 39	204
Box 43	176
Box 53	173
Box 60	181
Box 65	201
Box 67	203
Box 68	193
Box 69	191
Box 71	180
Box 73	208
Box 74	176
Box 75	177
Box 87	175
Box 92	175
Box 95	177
Box 98 railing	197
Box 99	183
Bulbholder GU10	449
Caddie	615
Cala 10W G24	709
Cala 9W G24	709
Cam	643
Cam XL	643
Casambi magnet track control	369
Ceiling fixing 3PH recessed	319
Ceiling fixing 3PH surface	317
Central corner connector 48V	367
Central corner connector mini	349
Circus in	119
Circus in XL	117
Circus out	119
Circus out XL	117
Clos base	641
Clos base mini	641
Clos dual base	641
Clos dual base mini	641
Clos wall	565
Clos wall dual	565
Comet	579
Compac r recessed	431
Compac sq recessed	431
Concord 48V mini	359
Concord surface	469
Control basic	300
Control Casambi	296
Control Dali push	304
Control Dali push	303
Control Dali push triac	303
Control Dali SPI APP	303
Control Dali touch	303
Control DMX	301
Control driver RF / push	305
Control PMW / RF	302
Control push / triac	302
Control SPI	301
Control top	300
Control Tuya	295
Converse	601
Cookie 3PH	325
Cookie 48V	391
Cookie 48V suspension	391
Cookie suspension base	525

Alphabetical Index (Name - Page)

Crown 3PH	337
Crown base	483
Cup 45W E27 / E40	703
Curve / straight end cap 48V	367
Curve Line 48V	377
Curve magnet track 48V surface	367
Curve Tram 48V	375
Dau	105
Dau E	105
Diro 48V	379
Dis	539
Dole GU10	685
Dot 48V	389
Dual	79
Dynamic control	291
Eclipse recessed	449
Egna	657
End cap 3PH	317
End cap 48V recessed	367
End cap 48V surface	367
End cap IP	397
End cap mini surface / recessed	349
Esférica 5,5W E14 / E27 dimm.	688
Esférica 5W E14 / E27	688
Esférica 7W E14 / E27	688
Evo	37
Evo dual	41
Evo E	45
Evo fly	39
Evo mini	43
Evo mini track	47
Evo R	43
Evo track	49
Fade	615
Fijo recessed	449
Filter	93
Fine 25	279
Fine 25 circle 48V	393
Fine 30	235
Fine 31	223
Fine 32 N	239
Fine 34	281
Fine 36	248
Fine 37	243
Fine 41	222
Fine 42	249
Fine 43	254
Fine 44	245
Fine 45	263
Fine 46	253
Fine 47	262
Fine 48	217
Fine 49	241
Fine 50	255
Fine 51	237
Fine 52	231
Fine 54	251
Fine 55	242
Fine 56	234
Fine 60	257
Fine 61	228
Fine 63	247
Fine 64	216
Fine 66 N	259
Fine 68	226
Fine 69	221
Fine 70	285
Fine 71	261
Fine 72	287
Fine 74	289
Fine 75	238
Fine 76	229
Fine 77	283
Fine 79	227
Fine 82	225
Fine 84	220
Fine 88	240
Fine 92	224
Fine 96	233
Fine 97	219
Fine DMX-4	273
Fine DMX-5	275
Fine running	265
Fine SPI-2	267
Fine SPI-3	269
Fine SPI-4	271
Fix	625
Flama dimmable E14	687
Flama E14 / E27	687
Flash	139
Flexible joint 3PH	317
Forest	81
Frame 48V IP 1m	399
Frame 48V IP 2m	399
Frame 48V IP 3m	399
Front base space	509
Gam	651
Globo 10W E27	692
Globo 10W E27 dimmable	692
Globo 15W E27	693
Globo 16W E27	693
Globo 22W E27	693
Golf surface	461
Golf XL surface	461
Grip	99
Grow	535
Hat 48V suspension	383
Hat suspension recessed	521
Hat suspension surface	521
Holder space	507
Hook GU10	677
Hook GU10 dimmable	677
Horizon	137
HQI tubular E27	712
HQI tubular G12	712
HQI tubular RX7S	712
Ice 48V IP	405
Ice XL 48V IP	405
Icon wall	563
Ilo	533
Ina	539
Iris	659
Kaa	133
Kaa line	135
Kom 3PH 20W	333
Kom 3PH 30W	333
Kom 3PH 40W	333
Konic 3PH	329
Kora r surface	485
Kora sq surface	487
Krion 300W	639
Krion 400W	639
Kubo	87
Kubo E	87
L joint 3PH recessed	319
L joint 3PH surface	317
L joint 48V ceiling recessed	367
L joint 48V ceiling surface	367
L joint ceiling IP	397
L joint ceiling mini recessed	349
L joint ceiling mini surface	349
L joint wall 48V ceiling recessed	367
L joint wall 48V ceiling surface	367
L joint wall ceiling inner mini recessed	349
L joint wall ceiling inner mini surface	349
L joint wall ceiling IP	397
L joint wall ceiling outer mini recessed	349
L joint wall ceiling outer mini surface	349
Lao	531
Led driver CC Dali	304

Led driver CC triac 305
Lek r wall 561
Lek sensor 559
Lek sq wall 561
Lena 3PH 341
Lievo space 503
Lievo XL space 503
Lift 71
Line 48V 377
Line 48V mini 361
Lineal 13W R7S 711
Lineal 9W R7S 711
Lineal tubular 11W R7S dimmable 711
Lineal tubular 5W R7S 710
Lineal tubular 9W R7S 710
Lineal tubular 9W R7S dimm. 710
Linear joint 3PH spacing recessed 319
Linear joint 3PH spacing surface 317
Linear joint 3PH without spacing 317
Linear joint 48V recessed 367
Linear joint 48V surface 367
Linear joint IP 397
Linear joint IP68 537
Linear joint mini 349
Lira Ufo 100W / 150W / 200W 666
Lira Ufo 240W 667
Lonja 3PH 335
Luk r recessed 453
Luk r recessed IP 453
Luk sq recessed IP 453
Luky 537
Lynk G53 683
Lynk GU10 683
Lynk GU10 dimmable 683
Mac base 555
Mac floor 645
Mac floor XL 645
Mac wall 555
Mac wall base 557
Mac wall XL 555
Mac XL base 555
Madi 603
Magnet track 48V recessed 367
Magnet track 48V surface 367
Magnet track mini recessed 349
Magnet track mini surface 349
Max BA15d 708
Micro globo 6W E27 692
Micro Zoom recessed 413
Micro Zoom XL recessed 413
Mini Bora 48V 373
Mini Bora recessed 427
Mini Bora surface 463
Mini Comet 579
Mini Concord 48V mini 359
Mini Concord surface 469
Mini Golf surface 460
Mini Hat 48V suspension 383
Mini Hat suspension recessed 521
Mini Hat suspension surface 521
Mini Icon wall 563
Mini Kora r surface 485
Mini Kora sq surface 487
Mini Line 48V 377
Mini Line 48V mini 361
Mini mac base 555
Mini Mac wall 555
Mini Oxo recessed 421
Mini Oxo rect 2 recessed 423
Mini Oxo rect 4 recessed 423
Mini Oxo rect 6 recessed 423
Mini Oxo sq recessed 421
Mini Picolo 48V mini 351
Mini Pla 589
Mini Rubyc surface 471
Mini Sigma 613
Mini Thessis dimm recessed 443
Mini Thessis recessed 441
Mini Tram 3PH 331
Mini Tram 48V 375
Mini Tram recessed 429
Minimus 103
Mirrow 89
Mis r wall 541
Mis sq wall 541
Motion sensor 307
Nano Alp space 499
Nano Argo flat recessed 409
Nano Golf surface 460
Nano Line 48V 377
Nano Oxo recessed 419
Nano Oxo sq recessed 419
Nano Pulsar r / sq recessed 415
Nano Pulsar r / sq surface 415
Nano Pulsar r / sq trim 415
Nano Sigma 613
Nano Tram 48V 375
Nano Tram recessed 429
Narrow GU10 dimmable 679
Neo 567
Neo sensor 569
Neo XL 567
Neo XL sensor 569
Nexus 77
Nik 619
Nitro GU10 685
Nix 539
Noa 80W E27 / E40 704
Noa 85W E27 / E40 704
Noi dimm recessed 439
Noi recessed 439
Nox surface 489
Nyneto 101
Obo 19W E27 700
Obo 27W E27 700
Obo 36W E27 / E40 701
Obo 45W E27 / E40 701
Oma 571
One GU10 wall 591
One GU10 wall dual 591
One recessed 451
One surface 491
Optic 611
Optional spike 175mm 630
Outdoor track IP 397
Oxo dimm recessed 425
Oxo sq dimm recessed 425
Par 30 E27 697
Par 38 3.000K E27 697
Par 38 Green E27 697
Picolo 3PH 321
Picolo 48V mini 351
Picolo AR111 3PH 323
Picolo AR111 surface 481
Picolo base 479
Picolo GU10 3PH 323
Picolo GU10 surface 481
Pl T40 E27 696
Pla 589
Pla XL 589
Plus surface 467
Polaris 100W 637
Polaris 150W 637
Polaris 200W 637
Polo 537
Popa 653
Popa XL 653
Port 535
Power GU10 682
Power GU10 dimmable 682

Alphabetical Index (Name - Page)

Power MR16	682
Power supplies 24V	308
Power supplies 48V	366
Power supplies push / RF	295
Power supplies push / RF / Tuya	295
Power supply 3PH recessed	319
Power supply 3PH surface	317
Prisma E14	686
Proa	655
Pucom r trim	435
Pulcom led accessory	435
Pulcom r asymm trim	435
Pulcom r recessed	433
Pulcom r recessed asymm	433
Pulcom r surface	435
Pulcom sq recessed	433
Pulcom sq recessed asymm	433
Pulsar dimm recessed	417
Pulsar surface accessory	417
Pulsar trim	417
Pun	543
Pure wall	549
PVC trim 48V	367
Quick	69
R-39 E14	694
R-50 E14	694
R-63 E27	694
R-63 s-line GU10	681
R-80 E27	695
R-90 2.200K E27	695
R-90 3.000K E27	695
Recessed base 3PH	319
RF Control for Tuya	294
Rok recessed	455
Rubyc surface	471
Sair	623
Sair XL	623
Selen	581
Shop E14	686
Side base space	507
Sigma	613
Sigma XL	613
Signal	621
Sil E27	698
Skin	533
Sky 100W	635
Sky 10W	634
Sky 10W sensor	633
Sky 10W spike	629
Sky 10W switch	630
Sky 150W	635
Sky 200W	635
Sky 20W	634
Sky 20W switch	630
Sky 30W	634
Sky 30W sensor	633
Sky 30W switch	631
Sky 40W switch	631
Sky 50W sensor	633
Sky solar sensor	663
Smile 20W E27	702
Smile 40W E27	702
Smile 60W E40	702
Sono 3PH	343
Sono XL 3PH	343
Sphere 48V	385
Sphere 48V mini	357
Sphere 48V mini suspension	357
Sphere 48V suspension	385
Sphere alp wall	575
Sphere wall	575
Square	107
Standard 10W E27 dimmable	691
Standard 12W E27	690
Standard 12W E27 dimmable	691
Standard 15W E27	690
Standard 17W E27 dimmable	691
Standard 6W E27	689
Standard 9W E27	689
Start connector 48V	367
Start connector mini	349
Stem	607
Steps	535
Sunset r	585
Sunset sq	585
Sunset XL	587
Sunset XL dual	587
Surface base 3PH	317
Suspension kit 3PH	317
Suspension kit 48V	367
Suspension kit mini	349
Sweet usb-a	551
Sweet wall	551
System GU10	680
System GU10 dimmable	680
System MR16	680
T joint 3PH recessed	319
T joint 3PH surface	317
T joint ceiling mini recessed	349
T joint ceiling mini surface	349
T joint IP68	537
Tao recessed	437
Tax	91
Thessis dimm recessed	443
Thessis recessed	441
Thessis XL recessed	441
Three phase track recessed	319
Three phase track surface	317
Time	75
Time E	75
Time track	85
Time wall sensor	83
Tot suspension / surface	527
Tot XL suspension / surface	527
Tram 3PH	331
Tram 48V mini	361
Tram recessed	429
Tram XL recessed	429
Triton	141
Triton down	143
Tron	573
Tubi	95
Tubi wall	97
Tundra	121
Tura	647
Tura XL	647
Tutto GU10	676
Tutto MR11	676
Tuya Gateway	292
Tween recessed	547
Tween surface	547
Twist	649
Ufo 300W	673
Ufo Lens Dali 100W	668
Ufo Lens Dali 150W	668
Ufo Lens Dali 200W	669
Ufo Lens Dali 240W	669
Ufo Lens switch 120W/160W/200W	667
Ufo Lens switch 140W/190W/240W	667
Ufo Lens switch 60W/80W/100W	666
Ufo Lens switch 90W/120W/150W	666
Uniform-line G4	706
Uniform-line G9	707
Uniform-line GU10	678
Uniform-line GU10 dimmable	678
Uniform-line long G4	706
Uniform-line long G9	707
Uniform-line MR16	678
Urban	52
Urban asymmetric	63

Urban asymmetric E	63
Urban E	55
Urban fly	59
Urban fly E	59
Urban market	67
Urban track	65
Urban train	57
Urban train E	57
Urban wall sensor	64
Urban emercency	53
Urban sensor casambi	53
Urban work	61
Urban work E	61
Vision	73
Visor	605
Visor solar	661
Volt r 48V	387
Volt r base	473
Volt r GU10 base	476
Volt r3 GU10 surface	477
Volt r3 surface	475
Volt sq 48V	387
Volt sq base	473
Volt sq GU10 base	476
Volt sq3 GU10 surface	477
Volt sq3 surface	475
Waterproof silicone cover IP	397
Wech	627
Wire space	507
X joint 3PH recessed	319
X joint 3PH surface	317
X joint ceiling mini recessed	349
X joint ceiling mini surface	349
X joint IP68	537
Zas r	617
Zas sq	617
Zero design	126
Zero direct	125
Zero direct XL	123
Zero dual	131
Zero in	113
Zero in XL	109
Zero out	115
Zero out XL	111
Zibor	581
Zio GU10 wall	593
Zio GU10 wall dual	593
Zio recessed	451
Zio surface	491
Zoe 48V mini	355
Zoe 48V mini suspension	355
Zoe 48V suspension	381
Zoe space	505
Zoe suspension recessed	519
Zoe suspension surface	519
Zoe XL space	505
Zoom 3PH	327

Numerical Index (Code - Page)

3364	317
3365	317
3366	317
3367	317
3368	317
3369	317
3370	317
3372	317
3373	317
3438	682
3441	682
3442	682
3443	682
3444	676
3445	676
3446	676
3447	676
3448	676
3449	676
3450	686
3452	683
3453	683
3454	683
3455	683
3456	683
3457	683
3458	317
3459	317
3464	683
3465	683
3466	683
3467	685
3468	685
3469	685
3470	685
3477	711
3478	711
3485	439
3486	439
3489	682
3490	682
3491	682
3496	659
3497	659
3518	693
3519	693
3520	693
3521	693
3522	693
3523	693
3524	692
3525	692
3526	692
3527	691
3528	691
3529	691
3530	691
3531	655
3532	655
3534	687
3569	708
3570	712
3571	712
3579	697
3580	615
3581	615
3582	569
3583	569
3584	569
3585	569
3586	643
3587	657
3590	643
3592	657
3614	317
3615	317
3616	317
3617	317
3618	317
3619	317
3620	317
3621	317
3622	317
3623	317
3625	317
3747	567
3748	567
3749	567
3750	567
3751	643
3752	643
3753	643
3754	643
3795	317
3796	317
3797	317
3805	319
3851	319
3852	319
3854	699
3855	699
3856	699
3857	699
3858	699
3859	699
3860	699
3861	699
3881	692
3882	653
3883	653
3884	653
3885	653
3886	569
3887	569
3888	569
3889	569
3890	567
3891	567
3892	567
3893	567
3897	319
3898	319
3900	704
3901	704
3902	704
3903	704
3904	711
3905	711
3906	711
3909	700
3910	700
3911	701
3912	701
3913	702
3914	702
3915	702
3917	700
3918	700
3919	701
3920	701
3921	701
3922	701
3923	701
3924	701
3925	702
3926	702
3927	702
3929	605
3931	605
3942	437
3943	437
3944	437
3945	437
3948	431
3949	431
3950	431
3951	431
3952	431
3953	431
3955	635
3956	635
3957	635
3965	704
3972	673
3983	561
3984	561
3985	561
3986	561
3987	561
3988	561
3995	537
3996	537
3997	537
3998	537
3999	537
4000	537
4001	537
4002	537
4003	681
4023	677
4024	677
4025	677
4038	339
4039	339
4040	339
4049	481
4050	481
4096	447
4097	447
4098	447
4099	447
4106	535
4107	535
4108	533
4109	533
4110	535
4111	535
4112	535
4113	535
4126	533

4127	533
4134	617
4135	613
4137	695
4175	551
4176	339
4177	339
4178	339
4193	661
4194	661
4209	661
4227	678
4228	678
4229	678
4236	441
4243	688
4244	688
4245	688
4246	688
4247	688
4248	688
4249	688
4250	688
4251	613
4254	634
4266	634
4276	634
4279	634
4280	634
4290	621
4291	619
4292	619
4295	682
4296	682
4297	415
4298	415
4299	415
4300	415
4301	415
4302	415
4303	561
4304	561
4308	633
4309	633
4310	633
4311	633
4312	561
4331	611
4337	333
4339	333
4340	629
4341	629
4349	633
4350	633
4351	633
4352	633
4353	633
4354	633
4355	633
4356	633
4362	317
4363	317
4364	317
4365	317
4367	539
4368	539
4369	539
4383	563
4384	563
4385	563
4386	563
4387	563
4388	563
4401	634
4402	634
4410	415
4411	415
4412	415
4413	415
4427	331
4428	331
4429	331
4430	331
4433	481
4435	323
4437	321
4438	321
4439	329
4440	329
4444	333
4445	333
4447	333
4448	333
4451	415
4452	415
4453	415
4454	415
4455	415
4456	415
4461	515
4462	515
4463	515
4464	515
4465	517
4466	517
4467	517
4468	517
4476	451
4477	451
4478	451
4479	451
4480	491
4481	491
4482	491
4483	491
4484	457
4485	457
4486	457
4487	457
4509	639
4510	639
4511	639
4512	639
4513	637
4514	637
4515	637
4516	637
4517	637
4518	637
4519	637
4520	637
4521	637
4522	467
4523	467
4541	331
4542	331
4543	331
4544	331
4549	419
4550	419
4551	419
4552	419
4566	666
4567	667
4573	373
4574	373
4575	373
4576	373
4577	373
4578	373
4579	373
4580	373
4581	373
4582	373
4583	373
4584	373
4585	373
4586	373
4587	373
4588	373
4589	427
4590	427
4591	427
4592	427
4593	427
4594	427
4595	427
4596	427
4597	427
4598	427
4599	427
4600	427
4601	427
4602	427
4603	427
4604	427
4605	523
4606	523
4607	523
4608	523
4609	523
4610	523
4611	523
4612	523
4613	523
4614	523
4615	523
4616	523
4617	523
4618	523
4619	523
4620	523
4621	463
4622	463
4623	463
4624	463
4625	463
4626	463
4627	463
4628	463

Numerical Index (Code - Page)

4629	463
4630	463
4631	463
4632	463
4633	463
4634	463
4635	463
4636	463
4637	367
4638	367
4639	367
4640	367
4641	367
4642	367
4643	367
4644	367
4645	367
4646	367
4647	367
4648	367
4649	367
4650	367
4651	367
4652	367
4653	367
4654	367
4655	367
4657	367
4658	367
4659	367
4660	367
4661	367
4662	367
4663	367
4664	367
4665	367
4666	367
4667	581
4668	581
4669	581
4670	581
4671	679
4672	679
4677	693
4678	693
4679	630
4680	630
4681	630
4682	630
4683	630
4684	630
4685	631
4686	631
4687	631
4688	631
4689	631
4690	617
4691	443
4692	617
4693	617
4694	631
4700	317
4701	317
4707	366
4708	366
4709	643
4710	643
4711	366
4731	429
4732	429
4735	429
4736	429
4737	429
4738	429
4742	433
4743	433
4744	433
4745	433
4746	433
4747	433
4748	433
4749	433
4750	513
4751	513
4752	513
4753	319
4754	319
4755	455
4756	455
4757	455
4758	453
4759	453
4761	435
4762	435
4763	435
4764	435
4766	441
4767	443
4768	389
4769	389
4770	389
4771	389
4772	391
4773	391
4774	391
4775	391
4776	375
4777	375
4778	375
4779	375
4780	375
4781	375
4782	375
4783	375
4784	377
4785	377
4786	377
4787	371
4788	371
4789	371
4790	371
4791	371
4792	371
4793	371
4794	371
4795	381
4796	381
4797	381
4798	381
4799	519
4800	519
4801	519
4802	519
4803	519
4804	519
4805	519
4806	519
4807	367
4808	511
4809	511
4810	511
4811	511
4812	511
4813	511
4814	511
4815	511
4816	511
4817	511
4818	511
4819	511
4820	625
4821	435
4822	435
4823	435
4824	435
4825	435
4826	435
4827	581
4828	581
4829	581
4830	581
4831	487
4832	485
4833	479
4834	479
4837	645
4838	645
4839	645
4840	645
4841	645
4842	645
4843	645
4844	645
4845	645
4846	645
4847	645
4848	645
4849	647
4850	647
4851	647
4852	647
4853	647
4854	647
4855	647
4856	647
4857	647
4858	647
4859	647
4860	647
4876	565
4877	565
4878	565
4879	565
4880	565
4881	565
4882	641
4883	641
4884	641
4885	641
4886	641

4887	641
4888	641
4889	641
4890	641
4891	641
4892	641
4893	641
4894	623
4895	623
4896	623
4897	623
4898	623
4899	623
4900	327
4901	327
4902	527
4903	527
4904	527
4905	527
4906	561
4907	561
4908	561
4909	561
4910	561
4911	561
4912	561
4913	561
4914	561
4915	668
4916	668
4917	668
4918	668
4919	669
4920	669
4921	669
4922	617
4923	615
4924	615
4930	513
4931	513
4932	513
4933	491
4934	491
4935	435
4946	343
4947	343
4950	343
4951	343
4952	515
4953	515
4954	517
4955	517
4956	292
4957	583
4958	583
4959	583
4960	583
4961	583
4962	583
4963	319
4964	319
4965	319
4966	319
4967	319
4968	319
4969	319
4970	319
4971	319
4972	319
4973	319
4974	319
4975	319
4976	319
4977	319
4978	319
4979	607
4981	607
4982	583
4983	583
4984	583
4987	441
4988	441
4989	585
4990	585
4991	585
4992	585
4993	585
4994	585
4995	555
4996	555
4997	555
4998	555
4999	555
5000	555
5001	555
5002	555
5003	555
5004	627
5005	627
5006	591
5007	591
5008	591
5009	591
5010	591
5011	591
5012	593
5013	593
5014	593
5015	593
5016	593
5017	593
5018	445
5019	439
5020	541
5021	541
5022	541
5023	541
5024	541
5025	541
5027	531
5028	545
5029	543
5030	441
5034	435
5035	435
5036	435
5037	387
5038	387
5039	387
5040	387
5041	473
5042	473
5043	473
5044	473
5045	475
5046	475
5047	475
5048	475
5049	476
5050	476
5051	476
5052	476
5053	477
5054	477
5055	477
5056	477
5057	417
5058	417
5059	417
5060	417
5061	421
5062	421
5063	423
5064	423
5065	423
5066	423
5067	423
5068	423
5069	471
5070	471
5071	469
5072	469
5073	579
5074	579
5075	579
5076	579
5084	501
5085	501
5086	501
5087	501
5088	503
5089	503
5090	503
5091	503
5092	505
5093	505
5094	505
5095	505
5096	499
5097	499
5098	499
5099	499
5106	507
5107	507
5108	421
5109	421
5110	417
5111	417
5112	579
5113	579
5114	499
5115	499
5116	499
5117	499
5118	501
5119	501
5120	501
5121	501
5122	501
5123	501

Numerical Index (Code - Page)

5124	501
5125	501
5128	507
5129	507
5139	366
5140	366
5147	666
5148	666
5149	667
5150	667
5154	603
5155	551
5156	551
5157	553
5158	553
5159	549
5160	549
5178	651
5179	325
5180	325
5181	391
5182	391
5183	525
5184	525
5185	391
5186	391
5187	684
5188	684
5189	684
5190	684
5191	684
5192	684
5196	547
5197	547
5198	547
5199	547
5200	547
5201	547
5202	377
5203	377
5204	377
5205	545
5206	417
5207	417
5208	415
5209	415
5210	415
5211	415
5212	417
5213	417
5214	453
5215	453
5216	453
5217	453
5218	555
5219	555
5220	555
5221	337
5222	337
5224	483
5225	483
5226	555
5227	555
5228	555
5229	555
5230	555
5231	555
5232	555
5233	555
5234	555
5235	555
5236	555
5237	555
5238	379
5239	379
5246	409
5247	409
5248	409
5249	409
5250	409
5251	409
5252	409
5253	409
5254	409
5255	409
5256	409
5257	409
5258	409
5259	409
5260	409
5261	409
5262	409
5263	409
5264	557
5265	557
5266	557
5267	411
5268	411
5269	411
5270	411
5271	411
5272	411
5274	413
5275	413
5276	413
5277	413
5278	413
5279	413
5280	413
5281	413
5282	413
5283	413
5284	413
5285	460
5286	460
5287	460
5288	460
5289	460
5290	460
5291	460
5292	460
5293	460
5294	460
5295	460
5296	460
5297	461
5298	461
5299	461
5300	461
5301	461
5302	461
5303	461
5304	461
5305	461
5306	461
5307	461
5308	461
5309	375
5310	375
5311	375
5312	375
5313	377
5314	377
5315	377
5316	377
5317	367
5319	367
5325	599
5326	599
5327	599
5328	599
5329	597
5330	597
5331	597
5332	597
5333	575
5334	575
5336	575
5337	575
5339	575
5340	575
5342	575
5343	575
5345	521
5346	521
5348	521
5349	521
5351	521
5352	521
5354	521
5355	521
5357	465
5358	465
5360	465
5361	465
5363	383
5364	383
5366	383
5367	383
5369	385
5370	385
5372	385
5373	385
5373	413
5375	385
5376	385
5378	385
5379	385
5381	571
5382	571
5383	571
5384	405
5385	405
5386	405
5387	405
5388	405
5389	405
5390	405
5391	405
5392	401

5393	401
5394	401
5395	401
5396	403
5397	403
5398	403
5399	403
5400	399
5401	399
5402	399
5403	399
5404	399
5405	399
5406	397
5407	397
5408	397
5409	397
5410	397
5411	397
5412	397
5413	397
5414	397
5415	397
5416	397
5417	397
5418	397
5419	587
5420	587
5421	587
5422	587
5423	587
5424	587
5425	397
5426	397
5431	393
5432	393
5441	393
5442	393
5558	366
5559	366
5572	663
5573	663
5574	443
5575	443
5576	613
5577	613
5578	349
5579	349
5580	349
5581	349
5582	349
5583	349
5584	349
5585	349
5586	349
5587	349
5588	349
5589	349
5590	349
5591	349
5592	349
5593	349
5594	349
5595	349
5596	349
5597	349
5598	349
5599	349
5600	349
5601	349
5602	349
5603	349
5604	349
5605	349
5606	349
5607	349
5608	349
5609	349
5610	349
5611	349
5612	349
5613	349
5614	349
5615	349
5616	361
5617	361
5618	361
5619	361
5620	361
5621	361
5622	361
5623	361
5624	361
5625	361
5626	361
5627	361
5628	351
5629	351
5630	351
5631	351
5632	351
5633	351
5634	351
5635	351
5636	353
5637	353
5638	353
5639	353
5640	355
5641	355
5642	355
5643	355
5644	355
5645	355
5646	355
5647	355
5648	359
5649	359
5650	359
5651	359
5652	359
5653	359
5654	359
5655	359
5656	357
5657	357
5658	357
5659	357
5660	357
5661	357
5662	357
5663	357
5666	559
5667	559
5668	559
5671	537
5672	537
5673	537
5674	623
5675	623
5676	623
5677	623
5678	615
5679	615
5680	615
5681	615
5682	617
5683	617
5684	589
5685	589
5686	589
5687	589
5688	589
5689	589
5690	589
5691	589
5692	589
5693	617
5694	617
5701	649
5706	521
5707	521
5708	521
5709	521
5710	521
5711	521
5712	521
5713	521
5714	383
5715	383
5716	383
5717	383
6023	366
6025	366
6721	369
6722	369
10119	186
10121	186
10122	186
11119	184
12119	184
13113	185
14119	180
14121	180
14122	180
15119	171
15121	171
15122	171
16119	171
16121	171
16122	171
17119	172
17121	172
17122	172
18119	172
18121	172
18122	172
19119	186
19121	186
19122	186

Numerical Index (Code - Page)

20049	311
20066	311
20120	310
20125	310
20130	310
20135	311
20140	311
20145	311
20150	311
20220	310
20225	310
20230	310
20235	311
20240	311
20245	311
20249	311
20250	311
20266	311
20625	310
20635	310
20915	311
20917	311
20925	311
20927	311
20991	310
20999	310
21119	198
21121	198
22119	194
22122	194
22410	308
22415	308
22420	308
22424	308
22430	308
22432	308
22435	308
22460	308
22490	304
22499	304
22570	295
22726	302
22799	302
22821	295
22856	295
22911	305
22948	303
22974	305
23119	173
23121	173
23122	173
24108	309
24109	309
24119	189
24121	189
24122	189
24159	309
24208	309
24308	309
24309	309
24609	309
24758	309
25247	279
25277	279
25307	279
25367	279
25407	279
25467	279
27119	199
27121	199
27122	199
28119	205
29119	207
29187	303
29735	303
29777	303
30129	209
30209	209
30270	235
30300	235
30400	235
31220	223
31227	223
31270	223
31277	223
31300	223
31307	223
31400	223
31407	223
31709	310
31809	310
31909	310
32121	193
32299	310
32499	310
32625	310
32635	310
32699	310
32899	310
32900	310
33119	195
33121	195
33122	195
34277	281
34307	281
34407	281
34720	127
34720	163
34721	127
34721	163
34722	127
34722	163
35119	179
35121	179
35122	179
35311	163
35312	163
35331	163
35332	163
35351	163
35352	163
35361	163
35362	163
35711	163
35712	163
35731	163
35732	163
35751	163
35752	163
35761	163
35762	163
37121	187
37270	243
37300	243
37400	243
38119	179
38121	179
38122	179
38360	248
39122	204
40111	335
40220	162
40339	162
40410	162
40430	127
40430	163
40481	162
40482	162
40483	162
40490	127
40490	163
40491	127
40491	163
40492	127
40492	163
40541	162
40542	162
40543	162
40550	162
40581	162
40582	162
40583	162
40591	162
40592	162
40593	162
40610	162
40631	127
40631	163
40632	127
40632	163
40634	127
40634	163
40635	127
40635	163
40666	162
40669	162
40721	162
40722	162
40723	162
40731	162
40732	162
40733	162
40741	162
40742	162
40743	162
40751	162
40752	162
40753	162
40770	162
40780	162
40790	162
40795	162
40831	162
40832	162
40833	162
40851	162
40852	162
40853	162
40881	162
40882	162

40883	162
40931	162
40932	162
40933	162
40990	162
40991	162
40992	162
40993	162
40999	162
41270	222
41275	222
41300	222
41305	222
41400	222
41405	222
41600	222
41605	222
42360	249
42365	249
43119	176
43121	176
43122	176
43430	254
44110	245
44270	245
44370	245
44500	245
45220	263
45227	263
45310	263
45317	263
45520	263
45527	263
46460	253
46465	253
47430	262
47437	262
47440	262
47447	262
48220	217
48225	217
48270	217
48275	217
48300	217
48305	217
48400	217
48405	217
49270	241
49300	241
49400	241
49600	241
50460	255
51270	237
51277	237
51300	237
51307	237
51400	237
51407	237
51600	237
51607	237
52270	231
52277	231
52300	231
52307	231
52400	231
52407	231
52600	231
52607	231
53119	173
53121	173
53122	173
54460	251
54467	251
55270	242
55300	242
55400	242
56270	234
56300	234
56360	234
56400	234
57001	299
57241	297
57242	297
57299	297
57400	299
57452	299
57588	298
57661	297
57662	299
57666	299
57881	299
57882	299
57924	298
59112	297
59121	297
59122	297
59141	297
59142	297
59182	296
59189	296
59249	298
59289	299
59519	298
59549	298
59629	298
59682	296
59689	296
59733	298
59739	298
59769	298
59777	298
59789	298
59847	297
60119	181
60121	181
60122	181
60460	257
61270	228
61275	228
61300	228
61305	228
61400	228
61405	228
61600	228
61605	228
62412	308
62415	308
62430	308
62460	308
62475	308
63360	247
63367	247
64153	309
64158	309
64270	216
64300	216
64400	216
64453	309
64458	309
64803	309
64808	309
65119	201
65121	201
65122	201
67122	203
68121	193
68122	193
68270	226
68300	226
68400	226
69119	191
69220	221
69225	221
69270	221
69275	221
69300	221
69305	221
69400	221
69405	221
69600	221
69605	221
70277	285
70307	285
70407	285
70437	285
71119	180
71121	180
71122	180
71470	261
71477	261
72277	287
72307	287
72407	287
72437	287
73119	208
73121	208
73122	208
74119	176
74121	176
74122	176
74277	289
74307	289
74407	289
74437	289
75119	177
75121	177
75122	177
75275	238
75305	238
75405	238
76300	229
76400	229
77019	300
77277	283
77307	283
77407	283
77437	283
79270	227
79275	227
79300	227

Numerical Index (Code - Page)

79305	227
79400	227
79405	227
79430	300
80260	300
81990	300
82270	225
82300	225
82400	225
82415	295
82440	295
82475	295
82995	300
83475	300
84270	220
84275	220
84300	220
84305	220
84400	220
84405	220
84431	302
84432	302
84600	220
84605	220
85120	307
85144	294
85183	307
85190	307
85220	307
85244	294
85263	307
85290	307
85330	307
85332	307
85336	307
85360	294
85396	307
85420	307
85444	294
85460	294
85470	294
85475	294
85544	294
85626	307
85634	294
85696	307
85876	302
85884	302
85890	294
85890	302
85894	294
85894	302
85990	294
85993	307
85995	294
85999	307
86019	300
87029	300
87119	175
87122	175
88220	240
88270	240
88300	240
88400	240
88460	300
89260	300
90990	300
91430	300
92119	175
92270	224
92300	224
92353	301
92400	224
92473	301
92553	301
92699	301
92853	301
93470	301
93579	301
95119	177
95121	177
95122	177
95153	301
95179	301
95479	301
96009	301
96307	233
96407	233
96477	233
97220	219
97415	295
98121	197
98122	197
99121	183
99122	183
205280	449
205284	449
205285	449
206280	449
206284	449
206285	449
222230	449
222238	449
223232	455
223233	455
301182	449
12XXXX	113
130L006	705
130L006-2	706
130L006-2F	706
130L184-5	707
130L184-5F	707
130L195-A	707
130L195-B	707
130L195-C	706
130L195-D	706
13XXXX	123
140026-C3T	710
140026-F4T	710
140L0261L	711
140L026L	711
141123-TC3	710
141123-TC3D	710
141123-TF4	710
141123-TF4D	710
14XXXX	115
171160P30-C	697
171160P38(N)-C	697
17XXXX	125
18XXXX	131
1XXXXX	119
20C90	310
20T90	310
257226C	451
258226C	451
2XXX1X	137
2XXXXX	37
2XXXXX	67
2XXXXX	99
32275-N	239
32305-N	239
32405-N	239
32605-N	239
3371-V2	317
33XXXX	107
3432-N	680
3433-N	680
3434-N	680
3435-N	680
3436-N	680
3437-N	680
3474-M	686
3479(N)	690
3480(N)	690
3481(N)	690
3482(N)	690
3483(N)	690
3484(N)	690
3492-N	680
3493-N	680
3494-N	680
3537(N)	688
3538(N)	688
3539(N)	689
3624-V2	317
3654-N	677
3655-N	677
3656-N	677
3916-N	601
3989-V3	323
3990-V3	323
39XX1X	139
3X9XXX	335
3XXXXX	55
4015-V2	678
4016-V2	678
4017-V2	678
4018-V2	678
4019-V2	678
4020-V2	678
4021-V2	678
4022-V2	678
4027-N	630
4241-N	489
4242-N	489
4332-N	471
4333-N	471
4334-N	469
4335-N	469
4336-N	333
4338-N	333
4449-V2	341
4450-V2	341
4457-D	425
4458-D	425
4459-D	425
4460-D	425
4499-V2	487
44X9XX	77
4500-V2	485

4649-N	367
4650-N	367
46XXXX	143
4733-V2	429
4734-V2	429
48XXXX	69
4985-N	329
4986-N	329
49XXX2	141
4XXXX8	81
4XXXXX	39
505119DIM-C	692
505143E-C	692
582L015-C3	709
582L015-C3B	709
582L015-F4	709
582L015-F4B	709
582L016T40E-C3	696
582L016T40E-F	696
58XXXX	103
592063-G12/3	712
592063-G12/4	712
592063-TC	712
592063-TF	712
592072-1	694
5920731-(N2)	694
592074-C(N)	695
592076-C3(N)	695
592122-FL2	687
592122-FL2E	687
592122-FL3	687
592122-FL3E	687
592122R39-2	694
592122R-C3	687
592125R2-C	691
592125R2-C3	691
592125R2-F	691
592125R-C	691
592125R-C3	691
592125R-F	691
592125S-6(N)	689
592125S-6C(N)	689
592125S-6F(N)	689
592125SC-2(N)	689
592125SC-3(N)	689
592125SC-4(N)	689
592141-C3E2	703
592141-E4C3	703
592165SIL-C	698
592165SIL-F	698
592563(N)-4C(N2)	688
592563(N)-4F(N2)	688
5925631(N)-4C(N2)	688
5925631(N)-4F(N2)	688
5925631-4C2(N)	688
592563-4C2(N)	688
592563R1-C2	688
592563R1-C3	688
592563R1-F4	688
592563R-C2	688
592563R-C3	688
592563R-F4	688
5XXXXX	41
5XXXXX	45
5XXXXX	79
61XX0X	64
66470/N	259
66477/N	259
6XXX8X	53
6XXXXX	47
6XXXXX	52
6XXXXX	53
6XXXXX	65
6XXXXX	71
71XXXX	95
72XXXX	91
74XXXX	135
76XXXX	133
78XXXX	89
79XXXX	97
81XX0X	83
86XXXX	121
88XXXX	101
8XXXXX	85
8XXXXX	147
91XXXX	109
92XXXX	111
97XX4X	573
9XXX1X	49
9XXXXX	117
AXX7X	159
AXX9X	159
B9XXXX	149
BCXX2X	152
BRXX2X	151
BTXX2X	161
BXXXXX	151
CCT-10DA	304
CCT-10TR	305
CCT-20DA	304
CCT-20TR	305
CCT-40DA	304
CCT-40TR	305
CCT-60DA	304
CCT-60TR	305
CXXXX	153
D-3626	317
D-3627	317
D-3628	317
DM4430	273
DM4437	273
DM5470	275
DM5477	275
F1XXXX	509
F2XXXX	509
F3XXXX	509
MCXXXX	157
NXXXXX	155
S1XXXX	507
S2XXXX	507
S2XXXX	507
S3XXXX	507
SP1300	265
SP1400	265
SP2430	267
SP2435	267
SP3470	269
SP3475	269
SP4437	271
TR10024	308
TR10024DA	309
TR10024TR	309
TR15024DA	309
TR15024TR	309
TR16024	308
TR3024	308
TR3024DA	309
TR6024	308
TR6024DA	309
TXXXXX	161
VXXXXX	73
X3XXXX	61
X5XXXX	87
X7XXXX	93
X8XXXX	63
X9XXXX	59
XXXXXX	43
XXXXXX	57
XXXXXX	75
XXXXXX	105
XXXXXX	153
Z11011	163
Z11012	163
Z11021	163
Z11022	163
Z11031	163
Z11032	163
Z11051	163
Z11052	163
Z11071	163
Z11072	163
Z11511	163
Z11512	163
Z11521	163
Z11522	163
Z11531	163
Z11532	163
Z11551	163
Z11552	163
Z11571	163
Z11572	163
Z12411	163
Z12412	163
Z12421	163
Z12422	163
Z12432	163
Z12451	163
Z12452	163
Z12471	163
Z12472	163
Z1XX0X	126
ZXXXXX	155

BENEITO FAURE®

Headquarters 1



Headquarters 2



Headquarters 1
C/ Thomas Edison, 4-6
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 2
C/ Nòria, 10
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 3
C/ Nòria, 15
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)



Headquarters 3



BENEITO FAURE®

FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C104592

BENEITO FAURE®